


# 30度梯形丝杆防转动固定件

面接点型  
双螺栓型·横向紧固型/径向紧固型






| 代码    | 类型   | 材质   |       | 表面处理 | 附件   |
|-------|------|------|-------|------|------|
|       |      | 国标   | 相当    |      |      |
| AKJ01 | 面接点型 | Q235 | SS400 | 发黑   | 夹紧把手 |

| 型号    |                 | P           | A    | B  | d   | E  | F  | G  | T  | d1  | M  | H  | R  | 使用把手        |
|-------|-----------------|-------------|------|----|-----|----|----|----|----|-----|----|----|----|-------------|
| 代码    | D <sub>H7</sub> |             |      |    |     |    |    |    |    |     |    |    |    |             |
| AKJ01 | 8               | 20 30 40    | P+26 | 12 | 6.3 | 16 | 10 | 9  | 16 | 6.5 | M6 | 35 | 51 | STK11-M6-12 |
|       | 10              |             | P+27 | 16 |     | 17 |    | 10 |    |     |    |    |    | STK11-M6-16 |
|       | 12              |             | P+28 | 22 |     | 18 |    | 11 |    |     |    |    |    | STK11-M6-20 |
|       | 15              |             | P+29 | 22 |     | 19 |    | 12 |    |     |    |    |    | STK11-M6-25 |
|       | 17              | 20 30 40 50 | P+30 | 25 | 9   | 20 | 12 | 13 | 19 | 9.0 | M8 | 46 | 64 | STK11-M8-25 |
|       | 20              |             | P+37 | 32 |     | 25 |    | 16 |    |     |    |    |    | STK11-M8-32 |
|       | 25              |             | P+39 | 38 |     | 27 |    | 18 |    |     |    |    |    | STK11-M8-32 |
|       | 30              |             | P+42 | 44 |     | 30 |    | 21 |    |     |    |    |    | STK11-M8-40 |
|       | 35              |             | P+44 | 44 |     | 32 |    | 23 |    |     |    |    |    | STK11-M8-40 |
|       | 40              |             | P+47 | 44 |     | 35 |    | 26 |    |     |    |    |    | STK11-M8-40 |



| 代码    | 类型    | 材质   |       | 表面处理 | 附件   |
|-------|-------|------|-------|------|------|
|       |       | 国标   | 相当    |      |      |
| AKM01 | 横向紧固型 | Q235 | SS400 | 发黑   | 夹紧把手 |
| AKM02 | 纵向紧固型 | Q235 | SS400 | 发黑   | 夹紧把手 |

请勿在空夹(未插入丝杠轴)状态下使用, 以免因变形而无法使用。

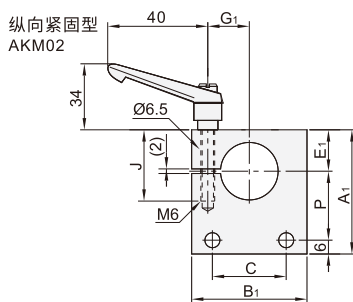

| 型号                                 |    | P          | 横向紧固型 |    |    |    |     |     | 纵向紧固型          |                |    |                |                |    | d           | 横向紧固型 | 纵向紧固型 |             |
|------------------------------------|----|------------|-------|----|----|----|-----|-----|----------------|----------------|----|----------------|----------------|----|-------------|-------|-------|-------------|
| 代码                                 | D  |            | A     | B  | C  | E  | G   | X   | A <sub>1</sub> | B <sub>1</sub> | C  | E <sub>1</sub> | G <sub>1</sub> | J  |             | 使用把手  |       |             |
| 横向紧固型<br>AKM 01<br>纵向紧固型<br>AKM 02 | 8  | +0.03<br>0 | 20    | 43 | 25 | 14 | 17  | 12  | 5              | 33             | 32 | 14             | 7              | 11 | 22          | 6.3   | 5.3   | STK11-M6-16 |
|                                    | 10 |            |       |    |    |    |     |     | 4              | 34             |    |                | 8              |    |             |       |       |             |
|                                    | 12 |            |       |    |    |    |     |     | 3              | 35             |    |                | 9              |    |             |       |       |             |
|                                    | 15 |            |       |    |    |    |     |     | 4.7            | 37             |    | 20             | 11             | 13 |             |       |       |             |
|                                    | 20 |            | 56    | 38 | 26 | 20 | 15  | 4.6 | 50             | 44             | 26 | 14             | 15             | 28 | STK11-M6-32 |       |       | STK11-M6-25 |
|                                    | 25 |            | 59    |    | 28 | 23 | 18  | 1.3 | 54             | 50             | 28 | 18             | 18             | 35 | STK11-M6-40 |       |       | STK11-M6-32 |
| 30                                 | 61 | 44         | 30    |    | 25 | 20 | 1.2 | 57  | 30             |                | 21 | 20             | 35             |    |             |       |       |             |



请按图示订货

■AKM01-D12

型号

代码

AKM01

D

12



交期Delivery

5天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台