


同步带用金属件 ◀ 螺帽紧固型(组件)



型号			S	A	B	T1	T2	h	L	P	附属 螺栓	d	安装 孔数
代码	皮带种类	皮带公称宽度											
EAC11 (齿条+压板)	MXL	025	6.4	27	11	4	4	0.51	19	19	M3-L15	3.3	6
		037	9.5		14					23			
		050	12.7		18					27			
	XL	025	6.4	67	12	6	5	1.25	56	25	M4-L16	4.3	8
		031	7.9		14					26			
		037	9.5		16					27			
	L	050	12.7	125	20	8	5	1.9	111	31	M5-L20	5.3	8
		075	19.1		26					33			
		100	25.4		28					39			
	H	150	38.1	166	45	10	5	2.3	147	47	M5-L20	5.3	8
		075	19.1		26					59			
		100	25.4		33					39			
	S2M	150	38.1	166	45	10	5	2.3	147	47	M5-L20	5.3	8
		200	50.8		58					59			
		040	4		8	4	4	0.76	18	71	M3-L15	3.3	6
		060	6		10					17			
		100	10		15					19			

型号			S	A	B	T1	T2	h	L	P	附属 螺栓	d	安装 孔数
代码	皮带种类	皮带公称宽度											
EAC11 (齿条+压板)	S3M	060	6	40	10	4	4	1.14	31	19	M3-L15	3.3	6
		100	10		14					23			
		150	15		20					29			
	S5M	100	10	66	16	6	5	1.81	51	27	M4-L16	4.3	8
		150	15		21					33			
		250	25		31					43			
	S8M	150	15	105	22	8	5	2.85	84	35	M5-L20	5.3	8
		250	25		32					45			
		300	30		37					51			
	T5	400	40	66	47	6	5	1.2	51	61	M4-L16	4.3	6
		100	10		16					27			
		150	15		21					33			
	T10	200	20	131	26	8	5	2.5	111	39	M5-L20	5.3	8
		250	25		31					44			
		300	30		37					45			

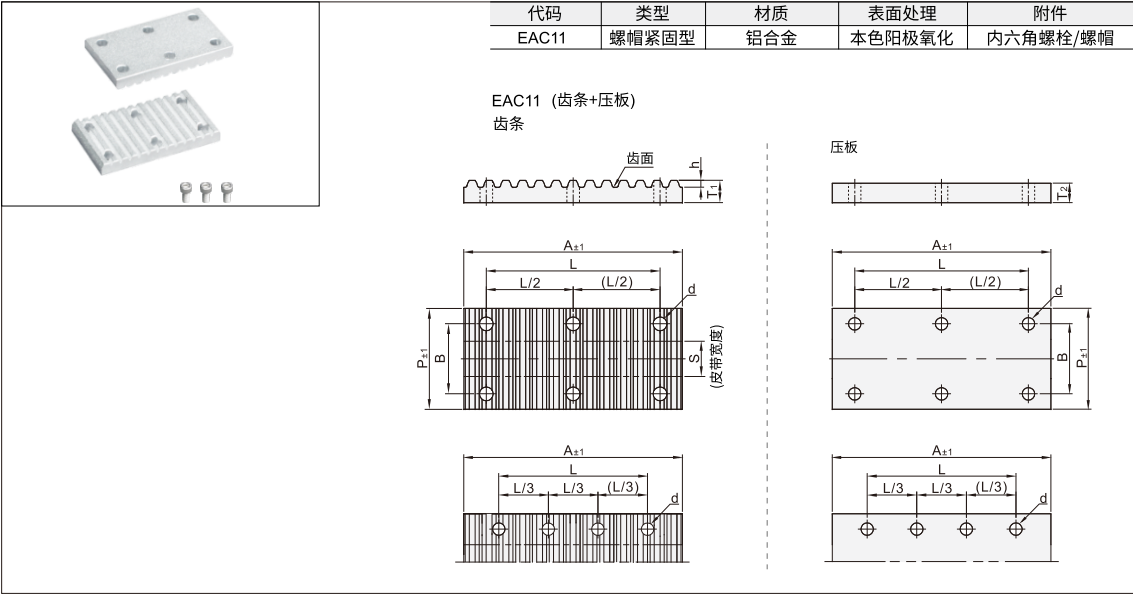

请按图示订货

■ EAC11-MXL-025

型号			S
代码	皮带种类	皮带公称宽度	
EAC11	MXL	025	6.4



交期Delivery

7天

发货

○本产品发货时间不含周日