


免键梯形齿同步带轮 ◀ S8M齿型(齿距8.0)带定心功能



型号				材质			表面处理		
皮带宽度 15mm	皮带宽度 25mm	皮带宽度 30mm	皮带宽度 40mm	带轮	法兰	衬套	带轮	法兰	衬套
A : 17 W : 22	A : 28 W : 33	A : 28 W : 33	A : 44 W : 49	铝合金	铝合金		本色阳极氧化		/
VAF51□□S8M150	VAF61□□S8M250	VAF71□□S8M300	VAF81□□S8M400	铝合金	铝合金		发黑		
VAF53□□S8M150	VAF63□□S8M250	VAF73□□S8M300	VAF83□□S8M400	S45C	SPCC	S45C	无电解镀锌		
VAF54□□S8M150	VAF64□□S8M250	VAF74□□S8M300	VAF84□□S8M400						

注:部分产品可能存在用库存改制,追加工内孔及挡边尺寸,内孔及挡边可能未做表面处理

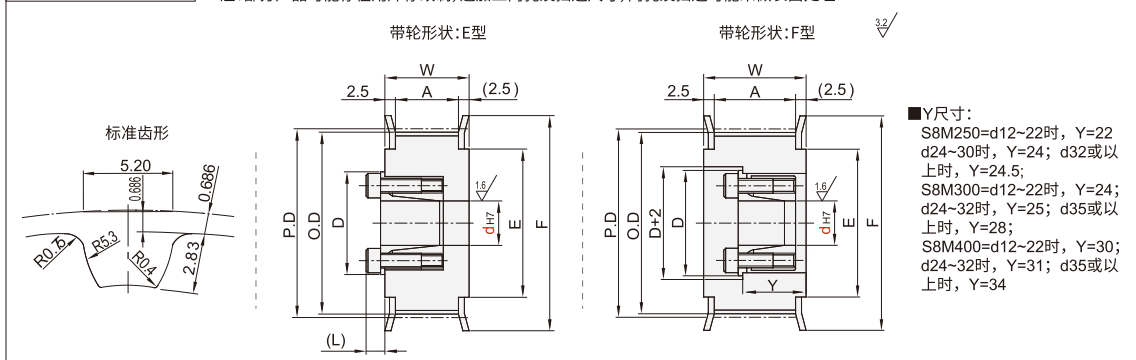

型号		带轮 形状	轴孔规格dH7(根据胀套尺寸表选择)								P.D.	O.D	F	E	A	W			
代码	齿数		S8M150		S8M250		S8M300		S8M400										
			E型	E型	F型	E型	F型	E型	F型										
VAF51-S8M 150 VAF53-S8M 150 VAF54-S8M 150	19	E F	12 14								48.38	47.01	55	40	S8M150 A: 17 W: 22				
	20										50.93	49.56	58						
	21		12 14 15 16								53.48	52.1	61	45					
	22										56.02	54.65							
	24		12 14 15 16 17 18 19								61.12	59.74	67	50					
25	12 14 15 16 17 18 19 20								63.66	62.29	70	56							
VAF61-S8M 250 VAF63-S8M 250 VAF64-S8M 250	26		14-22 (无21)	14 15 16 17 18 19 20 22								66.21	64.84	74	58	S8M250 A: 28 W: 33			
28	71.3											69.93	80	60					
30	76.39											75.02	87	67					
	32			14 15 16 17 18 19 20 22 24 25 28								81.49	80.12						
VAF71-S8M 300 VAF73-S8M 300 VAF74-S8M 300	34		16-22 (无21)	16 17 18 19				16 17 18 19 20 22 24 25 28 30 32				86.58	85.21	95	75	S8M300 A: 33 W: 38			
	36			20 22 24 25				/		/		91.67	90.3	99	80				
	38			28 30 32				/		/		96.77	95.39	104	84				
VAF81-S8M 400 VAF83-S8M 400 VAF84-S8M 400	40		20 22	20-35		20 22 24 25 28 30 32 35								101.86	100.49	111	90	S8M400 A: 44 W: 49	
	44			20-45															
	48	20-50		20 22 24 25 28 30 32		20 22 24 25 28 30 32 35 38 40 45				122.23	120.86	127	105						
	50			20 22 24 25 28 30 32		20 22 24 25 28 30 32 35 38 40 45		20 22 24 25 28 30 32 35 38 40 45		127.32	125.95	136	115						
	60			20 22 24 25 28 30 32 35 38 40 45 50		20 22 24 25 28 30 32 35 38 40 45 50		20 22 24 25 28 30 32 35 38 40 45 50		152.79	151.42	160	140						
	72			40 45 50		40 45 50		50 45		183.35	181.97	190	170						

dH7	容许最大扭矩N·m	D	(L)	dH7	容许最大扭矩N·m	D	(L)	dH7	容许最大扭矩N·m	D	(L)
12	44.1	28.5	6.5	20	216	42	8	35	883	62	10
14	63.7	30.5		22	255	44		40	1079	67	
15	80.4	31.5		24	363	46		45	1285	72	
16	83.3	33		25	392	47		50	1706	77	
17	92.2	33.5		28	441	50					10.5
18	95.1	34.5	8.5	30	500	52	8.5				
19	98.1	35.5		32	530	54					



请按图示订货

■ VAF51-S8M150-19-E-d12

型号		带轮形状	轴孔规格d H7
代码	齿数		
VAF51-S8M150	19	E	12-14



交期Delivery

7天

发货

○本产品发货时间不含周日

同步轮

15



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌,让采购更便捷,让设计更高效!

P748