


圆型冷压端子 ◀ OT系列



代码	材质	接线方式	导线截面	适用范围
JDZB02	全铜材质	压线	1.25mm ²	铜电缆连接

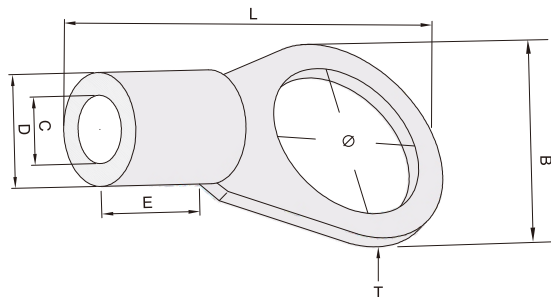

■ 产品参数

OT裸端子型号	尺寸人工测量有细微误差 请根据实际为准(单位: mm)							每包/个
	脚内圆 (C)	脚外圆 (D)	脚长 (E)	总长 (L)	外圆 (B)	孔径 (Φ)	厚度 (T)	
OT1-3	1.9	3	5	13.5	5.85	3	0.5	1000个/包
OT1-4	1.9	3	5	15.5	7.5	4	0.5	1000个/包
OT1.5-3	2.2	3.3	5	14.2	6	3	0.5	1000个/包
OT1.5-4	2.2	3.3	5	15.3	7.4	4	0.5	1000个/包
OT1.5-5	2.2	3.3	5	17.8	9.2	5	0.5	1000个/包
OT1.5-6	2.2	3.3	5	19	10.6	6.4	0.5	1000个/包
OT1.5-8	2.2	3.3	5	23.8	13	8	0.5	1000个/包
OT1.5-10	2.2	3.3	5	27.5	16.15	10.4	0.5	1000个/包
OT1.5-12	2.2	3.3	5	28.9	18	12.8	0.5	1000个/包
OT2.5-4	2.9	3.9	5	15.39	7.6	4	0.5	1000个/包
OT2.5-5	2.9	3.9	5	8	9.3	5	0.5	1000个/包
OT2.5-6	2.9	3.9	5	19.3	10.7	6	0.5	1000个/包
OT2.5-8	2.9	3.9	5	23.7	13	8	0.5	1000个/包
OT2.5-10	2.9	3.9	5	27.5	16	10.4	0.5	1000个/包
OT2.5-12	2.9	3.9	5	29	18	12.8	0.5	1000个/包
OT4-4	3.6	4.9	6.2	19.15	8.2	4	0.6	1000个/包
OT4-5	3.6	4.9	6.2	19.4	9	5	0.6	1000个/包
OT4-6	3.6	4.9	6.3	22.5	11.2	6.3	0.6	1000个/包
OT4-8	3.6	4.9	6.3	25.6	13.45	8.3	0.6	1000个/包
OT4-10	3.6	4.9	6.2	29.6	17.55	10.4	0.6	1000个/包
OT4-12	3.6	4.9	6.2	32	18.5	12	0.6	1000个/包
OT4-16	3.6	4.9	6.2	31.6	21.5	16	0.6	1000个/包
OT6-4	4.5	5.9	7.02	20.5	9.25	4	0.7	1000个/包
OT6-5	4.5	5.9	7	20.5	9.2	5	0.7	1000个/包
OT6-6	4.5	5.9	7.2	23.5	11.15	6	0.7	1000个/包
OT6-8	4.5	5.9	7.2	27.7	14.4	8.3	0.7	1000个/包
OT6-10	4.5	5.9	7.3	32.3	17.85	10.4	0.7	1000个/包
OT6-12	4.5	5.9	7	33.8	19.5	12.2	0.7	1000个/包
OT10-6	5.5	7.4	8.8	26.3	12.45	6.3	0.9	1000个/包
OT10-8	5.5	7.4	8.8	28.8	15.4	8.2	0.9	1000个/包
OT10-10	5.5	7.4	8.8	33	14.55	10.2	0.9	500个/包
OT10-12	5.5	7.4	8.8	33.4	19	12.3	0.9	500个/包
OT16-6	7.2	9.7	10.9	30.2	14	6.3	1.2	500个/包
OT16-8	7.2	9.7	10.9	30.7	15.4	8.1	1.2	500个/包
OT16-10	7.2	9.7	10.9	35.5	17.8	10.4	1.2	500个/包
OT16-12	7.2	9.7	10.9	39.2	20.5	12.2	1.2	500个/包
OT25-8	8.7	11.8	12.2	32	16	8	1.5	200个/包
OT25-10	8.7	11.8	12.2	37.4	19	10.2	1.5	200个/包