


弹性圆柱销 ◀ 带齿形槽/直杆型




代码	类型	材质	硬度	表面处理	适用标准
PLJ01	带齿形槽	不锈钢	42-48HRC	/	/
PLJ02	直杆型	弹簧钢	45-50HRC	发黑	JIS B 2808

带齿形槽
PLJ01

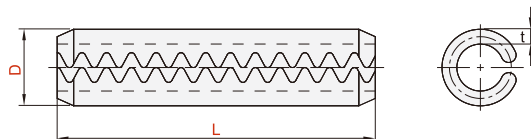

直杆型
PLJ02

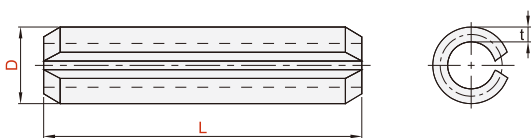

L尺寸公差表

L	公差
5~10	+0.5 0
12~50	+1.0 0
55~100	+1.5 0

带齿形槽

型号			L													t	
代码	D																
PLJ01	2	+0.25	5	6	8	10	12	14	16	18	20					0.4	
	3	+0.15	6	8	10	12	14	16	18	20	22	25	28	32		0.6	
	4		8	10	12	14	16	18	20	22	25	28	32	36	40	0.8	
	5	+0.40	10	12	14	16	18	20	22	25	28	32	36	40	45	50	1
	6	+0.20	12	14	16	18	20	22	25	28	32	36	40	45	50	56	1.2

直杆型

型号		L												t		
代码	D														D尺寸范围	
		min	max													
PLJ02	1	1.1	1.2	5 10												0.2
	1.2	1.3	1.4	5 10												0.25
	1.4	1.5	1.6	5 10												0.28
	1.6	1.7	1.8	5 10												0.3
	2	2.15	2.25	5 10 16 20												0.4
	2.5	2.65	2.75	10 16 20												0.5
	3	3.15	3.25	10 16 20 25 30												0.6
	4	4.2	4.4	10 16 20 25 30 35 40												0.8
	5	5.2	5.4	10 16 20 25 30 35 40 45 50												1
	6	6.2	6.4	10 16 20 25 30 35 40 45 50 55 60												1.2
	8	8.3	8.6	16 20 25 30 35 40 45 50 55 60 65 70 75 80												1.6
	10	10.3	10.6	16 20 25 30 35 40 45 50 55 60 65 70 75 80 90 100												2



请按图示订货

■ PLJ01-D2-L5

型号		L
代码	D	
PLJ01	2	5 6 8 10 12 14 16 18 20



交期Delivery

3天 发货

○ 本产品发货时间不含周日



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台