



磁铁 ◀ 方形



代码	类型	磁力方向	材质	表面处理	耐热温度
YLS61	方形	轴向	钕磁铁	镀镍	80°C
YLS62			铁氧体磁铁	/	300°C

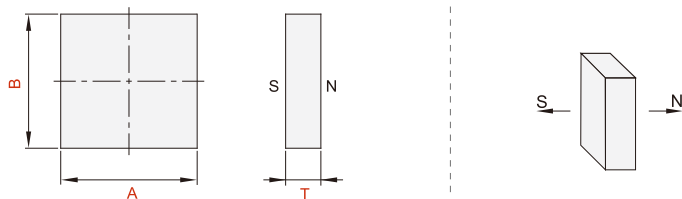

型号		A公差	B	B公差	T	T公差	吸引力N(kgf)	表面磁通密度高斯(G)	
代码	A								
YLS61	3	0 -0.1	3	0 -0.1	5	0 -0.1	2.8(0.29)	4000-4300	
	4		4		5.6(0.57)		4200-4500		
	5		5		5		8.9(0.91)	4300-4600	
	6		6		6		13.7(1.4)	4400-4700	
	8		8		6		23.2(2.37)	4300-4600	
	10		5		8		1	2.7(0.28)	1600-1900
					2		8.5(0.87)	2900-3200	
					5		16.8(1.71)	4200-4400	
					8		4100-4400		
			10		10		1	6.5(0.66)	1700-2000
							2	11.8(1.2)	1700-2700
							3	6.5(0.66)	1700-2000
							5	11.8(1.2)	2400-2700
							8	39.3(4.01)	4400-4700
							10	13.9(1.42)	3000-3300
			15		5		5	23.7(2.42)	4000-4300
							10	31.1(3.2)	4600-4900
							3	23.9(2.44)	2800-3100
							5	34.3(3.5)	3200-3700
	10				10		61.4(6.27)	4500-4800	
					10		40.8(4.16)	4500-4800	
					5		47.7(4.87)	3400-3700	
					10		77.8(7.94)	4600-4900	
	20		15		5		69.7(7.11)	3200-3700	
					6		84.8(8.65)	3000-3300	
					5		95.6(9.75)	3000-3400	
					6		110.8(11.31)	3200-3700	
30	20	5	6						
	30								

注：吸引力，表面磁通密度是指磁铁单件的值（仅供参考）。

型号		A公差	B	B公差	T	T公差	吸引力N(kgf)	表面磁通密度高斯(G)
代码	A							
YLS62	10	±0.1	5	±0.1	5	±0.1	1.6(0.16)	900-1100
	20		10				4.9(0.50)	950-1150
	30		±0.15				20	±0.15
	50	±1.2	20	±0.4			12.8(1.30)	
	30	±0.15	30	±0.15			21.6(2.20)	1150-1450
		±0.6	60	±1.2	29.5(3.00)			
		40	±0.8	20	±0.4		17.7(1.80)	
	40			±0.8	31.3(3.20)			



请按图示订货

■ YLS61-A3-B3-T5

型号		A	B	T
代码				
YLS61		3	3	5



交期Delivery

3天

发货

○ 本产品发货时间不含周日