



国标40系列 ◀ 40型材

系列码	材质	表面处理
XCE04	A6063-T5	喷砂电泳



- 切断面未进行表面处理
- 长度范围：50~6000mm。
- 切割精度：±0.5mm



(当L>1000mm时，长度尺寸公差±0.5)




■ 槽口详图




K处放大图


XCE04-4040




XCE04-4040C




XCE04-4040YA




XCE04-4040Y




XCE04-4040A




XCE04-4040B




XCE04-4040R




XCE04-4080C

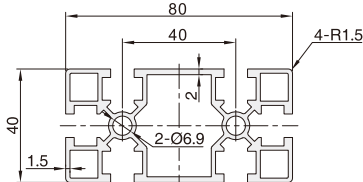



XCE04-4080

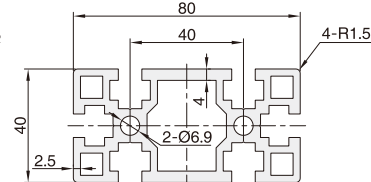

XCE04-4080Y

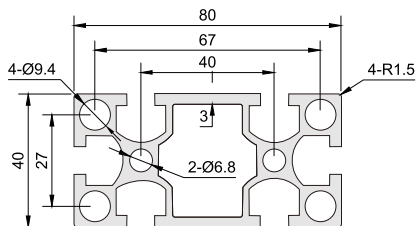


XCE04-8840Y

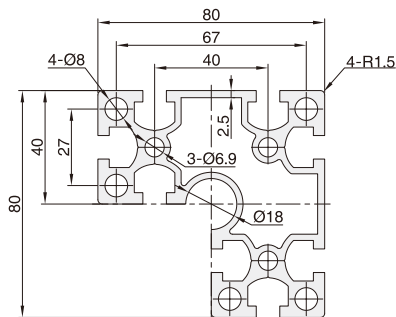


视图标准：第三视图

国标40系列 ◀ 40型材



XCE04-8080Y

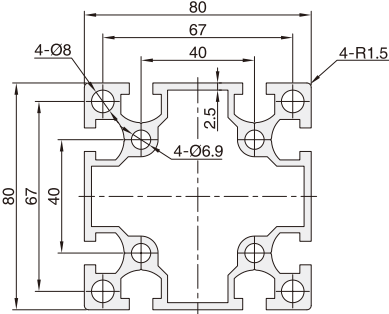

XCE04-8080

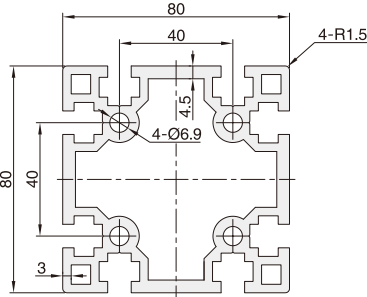


XCE04-8840R



视图标准：第三视角

系列码	规格	L(mm)	槽宽类型	截面尺寸	重量(kg/m)	截面积(mm²)	截面惯性矩		抗弯截面模数	
							Ix(mm⁴)	Iy(mm⁴)	Wx(mm³)	Wy(mm³)
XCE04	4040C	50~6000	8	40×40	1.24	455.52	7.23×10 ⁴	7.23×10 ⁴	3613.05	3613.05
	4040				1.86	681.84	10.52×10 ⁴	10.52×10 ⁴	5258.15	5258.15
	4040YA				1.64	601.65	9.65×10 ⁴	9.65×10 ⁴	4824.80	4824.80
	4040Y				1.93	708.51	11.33×10 ⁴	11.33×10 ⁴	5663.85	5663.85
	4040A				1.54	562.9	9.59×10 ⁴	9.59×10 ⁴	4716.52	4716.52
	4040B				1.51	553.28	9.39×10 ⁴	9.22×10 ⁴	4619.28	4607.85
	4040R				1.49	544.53	8.19×10 ⁴	8.18×10 ⁴	3624.71	3614.13
	4080C			40×80	2.05	752.52	13.54×10 ⁴	50.43×10 ⁴	6772.00	12607.63
	4080				3.22	1179.18	20.42×10 ⁴	75.13×10 ⁴	10209.05	18781.65
	4080Y				2.56	947.14	17.33×10 ⁴	60.06×10 ⁴	8663.10	15765.58
	8840Y			80×80	4.18	1529.31	97.19×10 ⁴	97.19×10 ⁴	21489.46	21489.46
	8840R				3.41	1248.10	72.53×10 ⁴	72.53×10 ⁴	17035.40	17035.40
	8080Y				4.38	1604.00	124.82×10 ⁴	124.82×10 ⁴	31205.43	31205.43
	8080				5.34	1955.56	145.59×10 ⁴	145.59×10 ⁴	36398.28	36398.28

■加工项目

指定方法	说明
LT(左面)	选型方法: LT/RT/DT  ■ Ø6.9通孔变更为螺孔M8深24。
RT(右面)	
DT(两面)	

■加工项目指定方法，见订货范例。



请按图示订货

■ XCE04-4040C-L150-LT

系列码	规格	L(mm)	加工项目
XCE04	4040C	L150	LT



交期Delivery

5天

发货

○本产品发货时间不含周日