


悬臂销 ◀ 带挡圈槽型 标准型




代码	类型	材质		表面处理
		国标	相当	
MXB01	带挡圈槽型 标准型	45	S45C	发黑
MXB02				无电解镀锌
MXB06				/
MXB08				发黑
MXB11	带挡圈槽型 标准型	45	S45C	无电解镀锌
MXB12				/
MXB16				/



螺纹长度固定型
MXB01/02/06/08

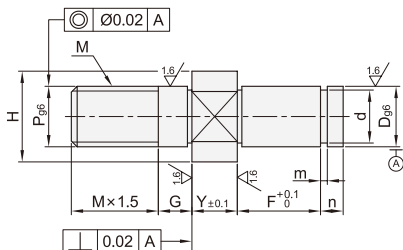

Y ≥ 17 时
两面宽度尺寸



螺纹长度指定型
MXB11/12/16

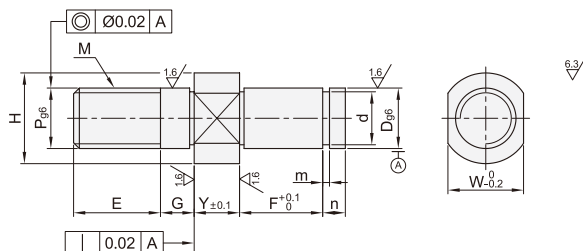

型号		D _{g6}		最小单位1				P _{g6}	M	H	W	d		m	n		
代码	规格			Y	F	G	E										
螺纹长度 固定型	3	3	-0.002 -0.008	2~35	3~60	3~8	3~8	3	M3	7	5	2	+0.060 0	0.5	2		
	4	4					4~10	4	M4	8	6	3					
	5	5	-0.004 -0.012				5~12	5	M5	9	7	4					
	6	6		6~15	6	M6	10	8	5								
	8	8	-0.005 -0.014	5~120	5~10	8~18	8	M8	12	10	7	+0.090 0	0.9	3			
	MXB01	10				10	10~22	10	M10	15	13	9.6			0 -0.090		
	MXB02	12				12											
	MXB06	13	13														
螺纹长度 指定型	15	15	-0.006 -0.017	2~65		5~15	12~27	12	M12	17	14	11.5	0 -0.110	1.15	4		
	16	16								18	15	12.4					
	17	17								20	17	14.3					
	18	18	21							18	15.2						
	20	20	23							20	16.2						
	20A	20	17														
	MXB11	22	-0.007 -0.020	4~80	10~170	5~20	20~45	20	M20	26	24	19	0 -0.210	1.35	5		
	MXB12	22						16	M16								
	MXB16	22						20	M20	28	25	21					
	25	25						16	M16	31	27	23.9					
25A	25	20						M20									
30	30	20	M20					36	32	28.6		1.65					
30A	30	16	M16														

可选加工	代码/技术说明	
YC	Y尺寸公差变更	选型方法 YC
WC	变更为四面扳手槽	选型方法：WC
ME	附带挡圈	选型方法：ME



请按图示订货



交期Delivery
5天 发货
○本产品发货时间不含周日

■ MXB01-3-Y20-F60-G8 (螺纹长度固定型)

型号	规格	Y	F	G
MXB01	3	2~35	3~60	3~8

■ MXB11-3-Y20-F60-G8-E6 (螺纹长度指定型)

型号	规格	Y	F	G	E
MXB11	3	2~35	3~60	3~8	3~8

■ MXB01-3-Y20-F60-G8-E6-YC (可选加工)

型号	规格	Y	F	G	E	可选加工
MXB01	3	2~35	3~60	3~8	3~8	YC WC ME