


# 悬臂销 ◀ 带挡圈槽型 内螺纹安装型





| 代码    |       |       | 材质       |        | 表面处理  |
|-------|-------|-------|----------|--------|-------|
| 标准型   | 台阶型   | 六角型   | 国标       | 相当     |       |
| MXC01 | MXC11 | MXC21 | 45       | S45C   | 发黑    |
| MXC02 | MXC12 | MXC22 |          |        | 无电解镀锌 |
| MXC06 | MXC16 | MXC26 | 0Cr18Ni9 | SUS304 | /     |

标准型 MXC01/02/06


标准型,  $Y \geq 17$ 时  
两平面宽度尺寸




台阶型,  $W < V$ ,  $Y \geq 17$ 时  
两平面宽度尺寸

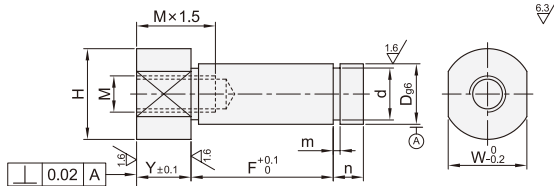

台阶型 MXC11/12/16

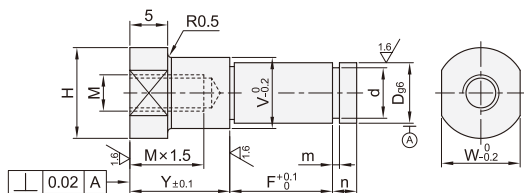

六角型 MXC21/22/26

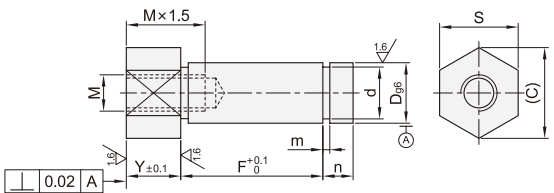


| 型号                             |     |    | Dg6              | 最小单位1  |     | M  | H  | W    | d                | m    | n      |
|--------------------------------|-----|----|------------------|--------|-----|----|----|------|------------------|------|--------|
| 代码                             | 规格  |    |                  | Y      | F   |    |    |      |                  |      |        |
| 标准型<br>MXC01<br>MXC02<br>MXC06 | 6   | 6  | -0.004<br>-0.012 | 5~110  | M3  | 10 | 8  | 5    | +0.075<br>-0.090 | 0.7  | 2      |
|                                | 8   | 8  | -0.005<br>-0.014 |        | M4  | 12 | 10 | 7    | 0.9              | 3    |        |
|                                | 10  | 10 | -0.006<br>-0.014 |        | M6  | 15 | 13 | 9.6  | 1.15             |      |        |
|                                | 12  | 12 |                  |        | M8  | 17 | 14 | 11.5 |                  |      |        |
|                                | 13  | 13 |                  |        |     | 18 | 15 | 12.4 |                  |      |        |
|                                | 15  | 15 |                  |        |     | 20 | 17 | 14.3 |                  |      |        |
|                                | 16  | 16 | -0.006<br>-0.017 | 10~160 | M10 | 21 | 18 | 15.2 | 0<br>-0.11       | 1.15 | 4      |
|                                | 17  | 17 |                  |        |     | 23 | 20 | 16.2 |                  |      |        |
|                                | 18  | 18 |                  |        |     | 26 | 24 | 19   |                  | 1.35 |        |
|                                | 20  | 20 |                  |        | M16 | 28 | 26 | 21   |                  | 1.35 | 4<br>5 |
|                                | 22  | 22 |                  |        |     | 31 | 27 | 23.9 | 0<br>-0.21       |      |        |
|                                | 25  | 25 | -0.007<br>-0.020 | 4~80   | M12 | 31 | 27 | 23.9 | 0<br>-0.21       |      | 5      |
|                                | 25A | 25 |                  |        | M20 | 36 | 32 | 28.6 |                  | 1.65 |        |
|                                | 30  | 30 |                  |        | M16 |    |    |      |                  |      |        |
|                                | 30A | 30 |                  |        |     |    |    |      |                  |      |        |

| 型号                             |     | Dg6 |                  | 最小单位1 |        | M   | S    | (C)        | d                | m    | n |
|--------------------------------|-----|-----|------------------|-------|--------|-----|------|------------|------------------|------|---|
| 代码                             | 规格  |     | Y                |       | F      |     |      |            |                  |      |   |
| 六角型<br>MXC11<br>MXC12<br>MXC16 | 6   | 6   | -0.004<br>-0.012 | 5~110 | M3     | 8   | 9.2  | 5          | +0.075<br>-0.090 | 0.7  | 2 |
|                                | 8   | 8   | -0.005<br>-0.014 |       | M4     | 10  | 11.5 | 7          | +0.090<br>-0.090 | 0.9  | 3 |
|                                | 10  | 10  | -0.014           |       | M6     | 13  | 15   | 9.6        | 0                | 1.15 |   |
|                                | 12  | 12  |                  |       | M8     | 14  | 16.2 | 11.5       |                  |      |   |
|                                | 13  | 13  |                  |       | M8     | 17  | 19.6 | 12.4       |                  |      |   |
|                                | 15  | 15  |                  |       | M10    |     |      | 14.3       |                  |      |   |
|                                | 16  | 16  | -0.006<br>-0.017 | 2~65  | M10    | 19  | 21.9 | 15.2       | 0<br>-0.11       | 1.15 | 4 |
|                                | 17  | 17  |                  |       |        |     | 16.2 |            |                  |      |   |
|                                | 18  | 18  |                  |       | M10    |     |      | 17         |                  |      |   |
|                                | 20  | 20  |                  |       | 10~160 | M12 | 24   | 27.7       | 19               |      | 4 |
|                                | 22  | 22  |                  |       |        |     |      | 21         |                  | 5    |   |
|                                | 25  | 25  | -0.007<br>-0.020 | 4~75  |        | M16 | 27   | 31.2       | 23.9             |      |   |
|                                | 25A | 25  |                  |       |        |     |      | 0<br>-0.21 |                  | 5    |   |
|                                | 30  | 30  |                  |       | M20    | 32  | 36.9 | 28.6       |                  | 1.65 |   |
|                                | 30A | 30  |                  |       | M16    |     |      |            |                  |      |   |

| 型号                             |     | Dg6 | 最小单位1            |        | M   | V  | H  | W  | d    | m              | n    |   |  |
|--------------------------------|-----|-----|------------------|--------|-----|----|----|----|------|----------------|------|---|--|
| 代码                             | 规格  |     | Y                | F      |     |    |    |    |      |                |      |   |  |
| 台阶型<br>MXC21<br>MXC22<br>MXC26 | 6   | 6   | -0.004<br>-0.012 | 5~110  | M3  | 8  | 10 | 8  | 5    | 0.075<br>0.090 | 0.7  | 2 |  |
|                                | 8   | 8   | -0.005<br>-0.014 |        | M4  | 10 | 12 | 10 | 7    | 0.080<br>0.090 | 0.9  | 3 |  |
|                                | 10  | 10  | -0.006<br>-0.017 |        | M6  | 13 | 15 | 13 | 9.6  | 0.080<br>0.090 |      |   |  |
|                                | 12  | 12  |                  |        | M8  | 15 | 17 | 14 | 11.5 |                |      |   |  |
|                                | 13  | 13  |                  |        |     | 16 | 18 | 15 | 12.4 |                | 1.15 |   |  |
|                                | 15  | 15  |                  |        |     | 18 | 20 | 17 | 14.3 |                |      |   |  |
|                                | 16  | 16  | -0.006<br>-0.017 | 10~110 | M10 | 19 | 21 | 18 | 15.2 | 0.11           |      | 4 |  |
|                                | 17  | 17  |                  |        |     | 20 | 23 | 20 | 16.2 |                | 1.15 |   |  |
|                                | 18  | 18  |                  |        |     | 21 | 23 | 20 | 17   |                | 1.35 |   |  |
|                                | 20  | 20  |                  |        | M12 | 24 | 26 | 24 | 19   |                |      |   |  |
|                                | 22  | 22  |                  |        |     | 26 | 28 | 26 | 21   |                | 1.35 |   |  |
|                                | 25  | 25  | -0.007<br>-0.020 | 7~80   | M16 | 29 | 31 | 27 | 23.9 | 0.21           |      | 5 |  |
|                                | 25A | 25  |                  |        | M12 |    |    |    |      |                |      |   |  |
|                                | 30  | 30  |                  |        | M20 |    |    |    |      |                |      |   |  |
|                                | 30A | 30  |                  |        | M16 | 34 | 36 | 32 | 28.6 |                | 1.65 |   |  |

可选加工

| 代码 | 技术说明     |                                           |
|----|----------|-------------------------------------------|
| YC | 变更Y尺寸公差  | 选型方法: YC<br>变更Y尺寸公差为±0.04                 |
| WC | 变更为四面扳手槽 | 选型方法: WC<br>六角型不适用。                       |
| ME | 附带挡圈     | 选型方法: ME<br>规格6~8, E型挡圈<br>规格10~30A, C型挡圈 |
| AD | 增加引导部    | 选型方法: AD<br>在如左图所示位置增加引导部                 |



| 规格  | M   | ADg6 |
|-----|-----|------|
| 6   | M3  | 6    |
| 8   | M4  | 8    |
| 10  | M6  | 10   |
| 12  | M8  | 12   |
| 13  |     | 13   |
| 15  |     | 15   |
| 16  | M10 | 16   |
| 17  |     | 17   |
| 18  |     | 18   |
| 20  | M12 | 20   |
| 22  |     | 22   |
| 25  | M16 | 25   |
| 25A | M12 |      |
| 30  | M20 |      |
| 30A | M16 | 30   |



MXC01-6-Y2-F5-YC

请按图示订货

| 型号      | Y    | F     | 可选加工        |
|---------|------|-------|-------------|
| 代码 规格   | 2~65 | 5~110 | YC WC AD ME |
| MXC01 6 |      |       |             |



交期Delivery

5天 发货

○本产品发货时间不含周日