

方形丝杠支座组件 ◀ 支撑侧 · 标准型






代码	类型		材质	表面处理
HAB31	标准型	支撑侧	① ③ S50C	① 发黑



代号	零件名称	数量
①	轴承座本体	1
②	轴承	
③	C型挡圈	

d=6~8

d=10~25

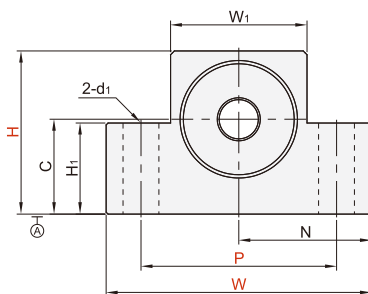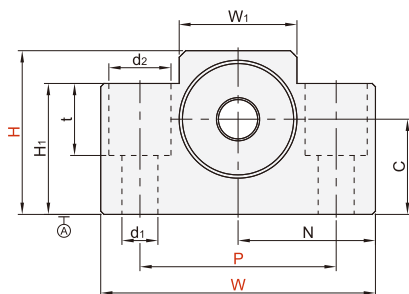

参考轴端加工尺寸



型号		Ød	Q	W	W ₁	H	H ₁	P	Ød ₁	Ød ₂	t	N	C	建议轴端加工尺寸						使用C型挡圈
代码	规格													搭配丝杠轴径	轴端部外径	挡圈沟槽尺寸				
												±0.02	⁰ _{-0.020}	ØD	Ød	ØA	E	F	G	
HAB31	6	6	12	42	18	25	20	30	5.5	9.5	11	21	13	6/8	6 ^{-0.005} _{-0.012}	5.7	9	6.8	0.8	SAMBP-6
	8	6	14	52	25	32	26	38	6.6	11	12	26	17	10/12						
	10	8	20	70	36	43	24	52	9	\	\	35	25	12/14/15	8 ^{-0.005} _{-0.012}	7.6	10	7.9	0.9	SAMBP-8
	12	10						60				35		14/15/16	10 ^{-0.005} _{-0.012}					
	15	15		80	41	49			40	30	18/20	15 ^{-0.005} _{-0.014}	14.3	13	10.15	1.35	SAMBP-15			
	20	20	26	95	56	58	25	75	11			47.5						20 ^{-0.005} _{-0.014}	19	19
	25	25	30	105	66	68		85	\	11		52.5	35	32/36	25 ^{-0.005} _{-0.014}	23.9	20	16.35		



请按图示订货

■ HAB31-8

型号		Ød	Q
代码	规格		
HAB31	6	6	12
	8	6	14



交期Delivery

3天 发货

○ 本产品发货时间不含周日

花键/支撑侧
滚珠丝杠
21