


中空旋转平台




Technical drawing showing the front view of the KR200 flange. Dimensions and specifications include:

- Outer Diameter: 200
- Inner Hole Diameter: Ø220
- Pitch Circle Diameter (PCD): Ø155 PCD
- Mounting Holes: 2-Ø6^{+0.014}/_{-0.011}
- Flange Thickness: 26 (top), 17 (bottom)
- Horizontal Spacing: 80
- Vertical Spacing: 14
- Additional Features: 6-M6x12, 2-Ø8^{+0.014}/_{-0.011}, 6-M2.5x5

旋转平台ARN系列 ◀ 200转台

ARN200-F

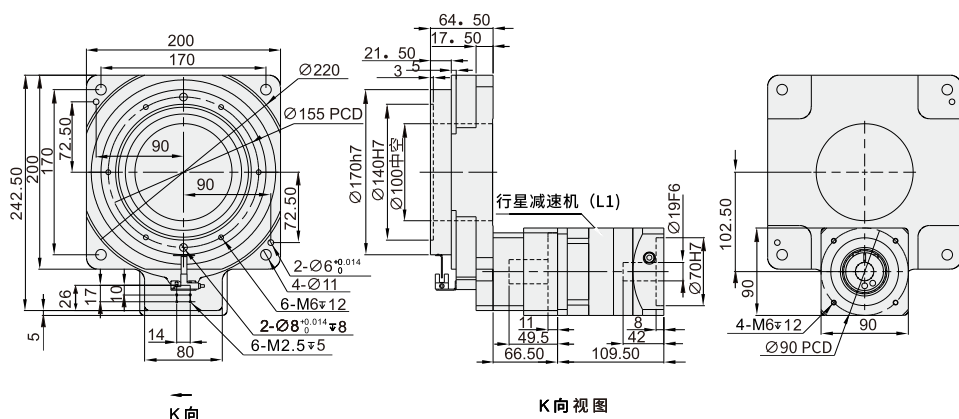

型号	单位	ARN200		ARN200-R/Z				ARN200-F				
适配马达	W	750/1000W AC伺服马达 86/110步进电机										
旋转平台轴承	/	交叉滚子轴承										
减速比	I	10	18	20	30	50	30	40	50	70	100	
容许扭矩	N.M	115	68	115			115					
容许最大扭矩	N.M	230	136	230			120					
允许盘面转速	r/min	200										
容许轴向负载	N	4000										
容许径向负载	N	4000										
抗扭刚性	Nm/arcmin	14.0										
定位精度	arc-min	±0.5		±0.5			±0.5					
重复定位精度	arc-sec	≤10		≤15			≤15					
旋转平台端面跳动	mm	≤0.01										
旋转平台径向跳动	mm	≤0.01										
旋转平台同心度	mm	≤0.01										
旋转平台平行度	mm	≤0.01										
寿命	h	>20000										
工作温度	°C	-25~+90										
润滑方式	/	合成油脂润滑										
防护等级	IP	IP50										
噪音	dB	≤65		≤65			≤65					
安装方式	/	任意角度										
重量	kg	8.95	8.91	12.70			11.61					

注: 配套其他电机需要提供电机尺寸或者图纸。



请按图示订货

■ ZIT04-ARN200-10-M1

代码	规格型号	减速比	匹配马达尺寸	选配
KZIT04	ARN200 ARN200-R/Z ARN200-F	10	M1:750W松下伺服 M2:750W台达伺服 B1:86步进电机	R:一体式直角换向器 Z:直角换向器 F:行星减速机



交期Delivery

4天 发货

○本产品发货时间不含周日