


微型深沟球轴承 ◀ 双面带防




代码	类型	轴承类别代码	密封类型-后置代码	轴承材质	轴承精度
GBG	标准型	6	双面铁盖密封 ZZ	SUJ2	GB/T307P0
SBG	标准型	6	双面非接触式橡胶密封圈 2RZ	SUS440C	JISB1514 0级
GBK	标准型(微型)	6	双面非接触式橡胶密封圈 2RS	SUJ2	GB/T307P0

GBG/SBG

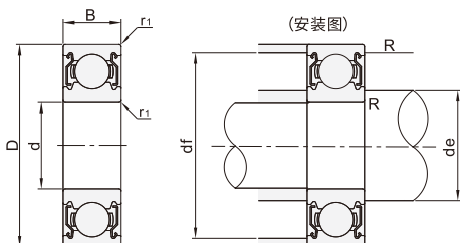

GBK 标准型(微型)

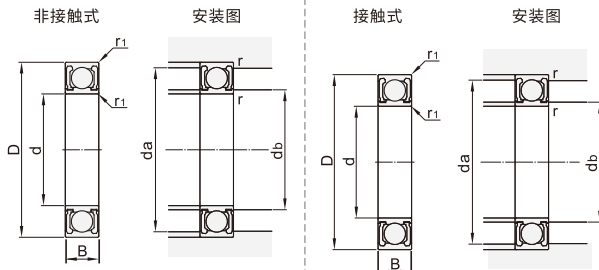

型号		d	D	B	r ₁ (min)	基本额定负载		容许转速rpm	安装尺寸			重量(g)
代码	轴承型号					Cr(动)	Co(静)	(参考)	de(min)	df(max)	R(max)	
GBG SBG	682ZZ	2	5	2.3	0.08	143	40	85000	2.7	3.9	0.008	0.17
	692ZZ		6	3	0.15	281	79	75000	3	4.8	0.15	0.38
	602ZZ		7	3.5		328	102	60000	3.2	5.8	0.15	0.58
	682AZZ	2.5	6	2.6	0.08	178	59	71000	3.7	4.9	0.08	0.29
	692AZZ		7	3.5	0.15	328	102	63000	3.85	5.65	0.15	0.55
	673ZZ		6	2.5	0.08	242	94	71000	3.6	5.4	0.08	0.2
	683ZZ	3	7	3	0.1	390	130	63000	3.9	5.8	0.1	0.45
	693ZZ		8	4		560	180	60000		6.8		0.61
	603ZZ		9	5	0.15	571	189	56000	4.2	7.8	0.15	1.13
	623ZZ	4	10	4		640	224	50000		8.8		1.6
	633ZZ		13	5	0.2	1301	488	40000	4.6	11.4	0.2	3.43
	674ZZ		7	2.5	0.08	222	88	60000		6.4	0.08	0.28
	684ZZ	5	9		0.15	640	224	53000	5	7.8	0.1	1.01
	694ZZ		11	4		715	276	48000	5.2	9.8	0.15	1.8
	604ZZ		12		0.2	957	350	48000	5.6	10.4	0.2	2.34
	624ZZ	6	13	5		1310	490	40000		11.4		3.2
	634ZZ		16		0.3	1340	523	36000	6	14	0.3	5.44
	675ZZ		8	2.5	0.1	218	131	53000	5.8	7.4	0.1	0.34
	685ZZ	7	11	5	0.15	715	282	45000	6.2	9.8		1.96
	695ZZ		13	4	0.2	1080	430	43000	6.6	11.4	0.2	2.4
	605ZZ		14			1330	505	40000		12.4		3.5
	625ZZ	8	16	5	0.3	1760	680	36000	7	14	0.3	4.8
	635ZZ		19	6		2336	896	32000		17		8.89
	676ZZ		10	3	0.1	496	218	45000	7.04	9.3	0.1	0.7
	686ZZ	9	13	5	0.16	1080	440	40000	7	11.8	0.2	2.69
	696ZZ		15		0.2	1350	530		7.6	13.4		3.8
	606ZZ		17	6		2190	865	38000		15		6
	626ZZ	10	19		0.3	2340	885	32000	8	17	0.3	8.1
	636ZZ		22	7		3333	1423	30000		20		14.5
	678ZZ		12	3.5	0.1	543	274	40000	9.05	11.33	0.1	0.99
	688ZZ	11	16	5	0.2	1610	715	36000	9.6	14.4	0.2	4.02
	698ZZ		19	6		1990	865			17		7.3
	608ZZ		22	7		3350	1400	34000	10	20	0.3	12
	628ZZ	12	24	8	0.3	4000	1590	28000		22		17
	638ZZ		28	9		4560	1983			26		30.3

型号			d	D	B	r ₁ (min)	基本额定负载		极限转速 rpm (参考)	安装尺寸			重量(g) (参考)				
代码	轴承型号						Cr(动) N	Cor(动) N		d _b (min)	d _a (max)	r (max)					
GBK 标准型 (微型)	/	非接触式	接触式	3	8	4	0.15	150	179	54000	4.2	6-8	0.15	0-61			
		623-2RS	10									224		50000	8.8	1.6	
			694-2RS									11		276	45000	9-8	2
			604-2RS									12		360	43000	10-4	2-3
	624-2RZ	624-2RS	13	5	0.2	200	490	42000	5.6	11.4	0.2	3-5					
		695-2RS	4	430			40000	2-4									
	/	605-2RS	5	14	0.3	300	505	39000	6.6	12-4	0.3	3-5					
		625-2RS		16			680	37000		7		14	4-8				
	696-2RZ	696-2RS	15	0.2	1350	530	7-6	13-4	0.2	3-8							
	/	606-2RS	17		2190	865		35000		15	6						
	626-2RZ	626-2RS	6	19	6	0.3	2340	885	34000	8	17	0.3	8-1				
	698-2RZ	698-2RS					1990	865	33000				7-3				
	608-2RZ	608-2RS	8	22	7	3350	1400	32000	10	20	12						
	628-2RZ	628-2RS		24	8	4000	1590	31000		22	17						



请按图示订货

■GBG-682ZZ

代码	规格	d
GBG	682ZZ	2



交期Delivery

3天 发货

○本产品发货时间不含周日

轴承
关节
轴承 26