


凸轮随动器 ◀ 圆柱型·球面型 标准型




代码	类型		材质	
			国标	相当
BCP05	经济型	圆柱型	GCr15	SUJ2
BCP06			9Cr18Mo	SUS440C
BCP25		球面型	GCr15	SUJ2
BCP26			9Cr18Mo	SUS440C

圆柱型
BCP05/06




带密封圈


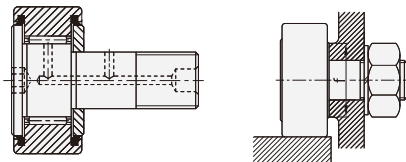


球面型
BCP25/26

无密封圈



带密封圈



■请在80℃以下的环境中使用带密封圈的型号。

型号		密封圈	D	Mx螺距	B	B1	L	d1	d2	V	V1	H	r	f(min)	
代码	d														
圆柱型 BCP05 BCP06	3	0 -0.012	10	M3X0.5	7	8	17	—	—	5	—	2(1.5)	0.3	6.8	
	4		12	M4x0.7	8	9	20			6		2.5(2)		8.6	
	5		13	M5x0.8	9	10	23			7.5		3(2.5)		9.7	
	6		16	M6x1.0	11	12	28			9		3		11	
	8		19	M8x1.25			32			11		4		13	
	10	0 -0.015	22	M10x1.25	12	13	36	13	5	1	15				
	10C		M10X1.0												
	10A		M10x1.25												
	10D		M10X1.0												
	球面型 BCP25 BCP26	12	0 -0.018	30	M12X1.5	14	15	40	6	3	14	6	6	1.5	20
12A		32		M16X1.5	18	19.5	52	18			8	24			
16		40			M18X1.5	20	21.5	58				20			26
18		52			M20X1.5	24	25.5	66				22			9
20		47		M24X1.5		29	30.5	80			25	11			40
24		62	8		4	25	11	8	2	46					
24A		72													
30		80													
30A		85		M30x1.5		35	37				100	32	15		
30B		90													

■ (1) d10C和d10D仅适用于BCP05/25。(2) BCP06/26仅适用d3~d20规格。(3) ()内的H值为不锈钢型。(4) d5~d10只在顶部加工有山润滑孔。



凸轮随动器 ◀ 圆柱型·球面型 标准型

型号		基本额定负荷				最大容许 负荷	轨迹表面负载容量		极限转速		重量	
		带保持架		全滚针			圆柱外圈	球面外圈	带保持架	全滚针	带保持架	全滚针
代码	d	C(kN)	Co(kN)	C(kN)	Co(kN)	Fo(kN)	kN	kN	min ⁻¹	min ⁻¹	g	g
圆柱型 BCP05 BCP06	3	1.47	1.18	—	—	0.36	1.37	0.37	47000	—	4.5	5
	4	2.06	2.05			0.78	1.76	0.47	37000		7.5	8
	5	3.14	2.77			1.42	2.25	0.53	29000		10.5	11
	6	3.59	3.58	6.94	8.5	2.11	3.43	1.08	25000	11000	18.5	19
	8	4.17	4.65	8.13	11.2	4.73	4.02	1.37	20000	8700	28.5	29
	10	5.33	6.78	9.42	14.3	5.81	4.7	1.67	17000	7200	45	46
	10C						5.49	1.06			45	46
	10A										60	61
	10D										60	61
	12	7.87	9.79	13.4	19.8	9.37	7.06	2.45	14000	5800	95	97
12A	7.45						2.74	105			107	
球面型 BCP25 BCP26	16	12	18.3	20.6	37.6	17.3	11.2	3.14	10000	4500	170	173
	18	14.7	25.2	25.2	51.3	26.1	14.4	3.72	8500	3800	250	255
	20	20.7	34.8	33.2	64.8	32.1	23.2	8.23	7000	3400	460	465
	20A						21	7.15			385	390
	24	30.6	53.2	46.7	92.9	49.5	34.2	10.5	6500	2900	815	820
	24A						39.8	12.9			1140	1140
	30	45.4	87.6	67.6	145	73.7	52.6	14.9	5000	2300	1870	1870
	30A						56	16.1			2030	2030
30B	59.3						17.3	2220			2220	

■上表中极限转速数值固用于无密封圈、润滑油润滑的型号。采用油润滑的型号容许使用上限为上述数值的130%；
带密封圈的型号容许使用上限为上述数值的70%。



请按图示订货

■ BCP05-d5-UU

型号		密封圈
代码	d	
BCP05	5	UU(带密封圈) —(无密封圈)



交期Delivery

3天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！