


六角支柱 ◀ L尺寸指定型/L尺寸螺纹指定型 一端外螺纹一端内螺纹型





一端外螺纹一端内螺纹型		材质		表面处理
L尺寸指定型	L尺寸螺纹指定型	国标	相当	
OBE01	OBE11	Q235	SS400	/
OBE02	OBE12			发黑
OBE03	OBE13			无电解镀锌
OBE06	OBE16	0Cr18Ni9	SUS304	/

注:Q235材质的产品出货时带有防锈油。

L尺寸指定型
OBE01/02/03/06



L尺寸螺纹指定型
OBE11/12/13/16

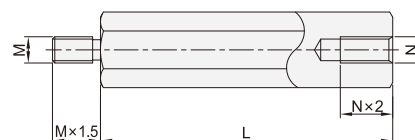

L	公差
8~300	±0.2
300.5~620	±0.3
620.5~1020	±0.4

型号	最小单位0.5		
代码	H	L	M K
OBE01	5	8.0-60.0	2.6 5.8
	6	15.0-60.0	3 6.9
	7	20.0-160.0	4 8.1
	8	20.0-260.0	5 9.2
	10	25.0-360.0	6 11.5
	12	25.0-420.0	6 13.9
	13	30.0-420.0	8 15.0
	14	30.0-520.0	8 16.2
	17	35.0-520.0	10 19.6
	19	45.0-520.0	12 21.9
OBE02	24	55.0-620.0	16 27.7
	27	65.0-820.0	20 31.2
	30	65.0-1020.0	20 34.6
	32	80.0-1020.0	24 36.9

型号	最小单位0.5		
代码	H	L	M.N K
OBE11	5	8.0-60.0	2 2.6 5.8
	6	15.0-60.0	3 4 6.9
	7	20.0-160.0	3 4 8.1
	8	20.0-260.0	3 4 5 9.2
	10	25.0-360.0	4 5 6 11.5
	12	30.0-420.0	4 5 6 8 13.9
	13	35.0-420.0	4 5 6 8 15.0
	14	35.0-420.0	4 5 6 8 10 16.2
	17	35.0-520.0	5 6 8 10 19.6
	19	45.0-520.0	5 6 8 10 12 21.9
OBE12	24	55.0-620.0	6 8 10 12 16 27.7
	27	65.0-820.0	5 6 8 10 12 16 20 24 31.2
	30	80.0-1020.0	5 6 8 10 12 16 20 24 34.6
	32	80.0-1020.0	5 6 8 10 12 16 20 24 36.9

可选加工

代码	技术说明
LC	变更L尺寸公差
	选型方法:LC L尺寸公差变更 L8~300变更为:±0.05 L300.5~620变更为:±0.10 L620.5~1020变更为:±0.15

代码	技术说明
MC ()	变更外螺纹长度
	选型方法:MC5 最小单位0.1



请按图示订货

■ OBE12-H6-L25-M4-N4

型号			
代码	H	L	M.N
OBE12	6	15~60	3 4



交期Delivery

6天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台