



带惰轮张力装置 ◀ 高度指定型

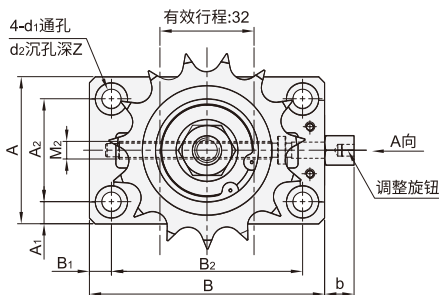

代码	类别	材质				表面处理
		安装板	惰轮轴	调整螺栓	螺帽	
AKAS01	高度指定型	SS400	S45C			发黑



型号		齿数	H最小单位	h(最大)	M1	M2	d	A	A1	A2	B	B1	B2	C1	C2	b	d1	d2	Z	X	Y
代码	系列																				
AKAS01	35	16	25~45	59.3	M8	M6	12	50	7.5	35	80	7.5	65	4	10	10.5	6.5	11	6.5	12	7
		18		63.3	M10		15														
	40	13	30~50	64.3	M8		12														
		15		68.3	M10		15														
		19		74.3	M14		20	60		45	85		70								
	50	13	35~55	73.3	M10	M8	15	60	10	40	90	10	70	5	13	15.5	8.5	14	8.5	16	8
		17		76.3	M12		17														
		17		79.3	M14		20														
	60	11	40~60	78.3	M10		15														
		14		84.3	M14		20														

■惰轮规格

系列	齿数	轴径	Dp	Do	T	轴承型号
35	16	12	48.82	54	4.3	6001ZZ
	18	15	54.85	60		6202ZZ
40	13	12	53.07	59	7.2	6001ZZ
	15	15	61.08	67		6202ZZ
	19	20	77.16	84		6204ZZ
50	13	15	66.34	74	8.7	6202ZZ
	15	17	76.35	84		6203ZZ
	17	20	86.39	94		6204ZZ
60	11	15	67.62	76	11.7	6202ZZ
	14	20	85.61	95		6204ZZ



请按图示订货

■ AKAS01-18-30

代码	系列	齿数	H最小单位
AKAS01	35	16	25~45
		18	



交期Delivery

7天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台