


圆线螺旋弹簧 ◀ 外径基准型(弹簧钢)

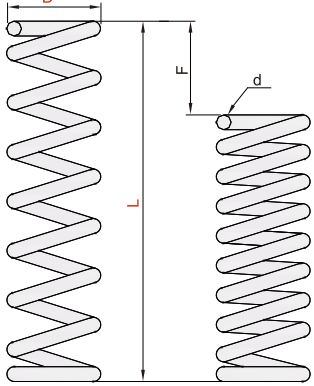



代码	类型	材质		表面处理	允许低 移量	弹簧常数 公差
		国标	相当			
AWF	外径基准型	琴钢丝	SWP	发黑	L×45%	±10%

■外径D公差Ø10以下-0.5mm~0mm Ø12以上-0.8mm~0mm
长度L公差50以下±1.5, 55以上±2.5
压紧长度为参考值, 因批次不同会有偏差, 理论使用次数100万次
AWF-D3-L5~L25,AWF-D4-L5~L30,AWF-D5-L5~L25,AWF-D6-L5
规格两端均未进行磨削加工.

型号		d	压紧长度	Fmax	N(kgf) max
代码	D				
AWF	3	5	0.26	2	2.25
		10	0.32	5	4.5
		15	0.32	5	6.7
		20	0.35	7	9
		25	0.35	7	11.2
		30	0.4	13.2	13.5
		35	0.4	13.2	15.7
		40	0.4	13.2	18
	4	5	0.32	2.3	2.25
		10	0.35	3.1	4.5
		15	0.4	5.6	6.7
		20	0.4	5.6	9
		25	0.45	9.9	11.2
		30	0.45	9.9	13.5
		35	0.5	16.5	15.7
		40	0.5	16.5	18
	5	5	0.35	2	2.25
		10	0.38	2.8	4.5
		15	0.4	3.4	6.7
		20	0.45	5.4	9
		25	0.5	8.5	11.2
		30	0.55	13.2	13.5
		35	0.55	13.2	15.7
		40	0.55	20.4	18
	70	45	0.6	20.4	20
		50	0.6	20.4	22.5
		55	0.6	20.4	24.7
		60	0.6	20.4	27
		65	0.6	20.4	29.2
		70	0.6	20.4	31.5

型号		d	压紧长度	Fmax	N(kgf) max
代码	D				
AWF	6	5	0.4	2.3	2.25
		10	0.5	5	4.5
		15	0.55	8	6.7
		20	0.55	8	9
		25	0.6	12	11.2
		30	0.65	16	13.5
		35	0.65	17	15.7
		40	0.65	17	18
	8	45	0.65	17	20
		50	0.7	25.2	22.5
		55	0.7	25.2	24.7
		60	0.7	25.2	27
		65	0.7	25.2	29.2
		70	0.7	25.2	31.5
		80	0.7	25.2	36
		10	0.6	5	4.5
	10	15	0.65	7.5	6.7
		20	0.7	10.8	9
		25	0.7	10.8	11.2
		30	0.75	14.5	13.5
		35	0.75	14.5	15.7
		40	0.8	20	18
		45	0.8	20	20
		50	0.8	20	22.5
	12	55	0.8	20	24.7
		60	0.85	27.6	27
		65	0.85	27.6	29.2
		70	0.85	27.6	31.5
		80	0.85	28.1	36
		10	0.65	5	4.5
		15	0.65	5	6.7
		20	0.8	10.4	9
	13	25	0.8	10.4	11.2
		30	0.85	14	13.5
		35	0.85	14	15.7
		40	0.9	17.5	18

圆线螺旋弹簧 ◀ 外径基准型(弹簧钢)

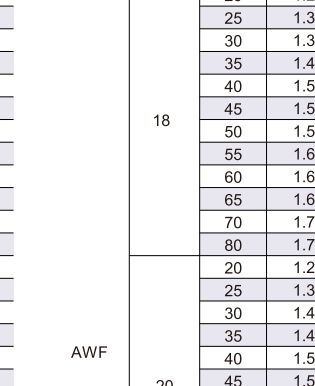

代码	D	L	d	压紧长度	Fmax	N(kgf) max

AWF

AWF: Fmax(容许位移量) = L×40%



请按图示订货

■ AWF-D3-L10

型号		
代码	D	L
AWF	3	5 10



交期Delivery

5天	发货
----	----

○本产品发货时间不含周日