


压缩弹簧 ◀ 外径基准型 (弹簧钢)

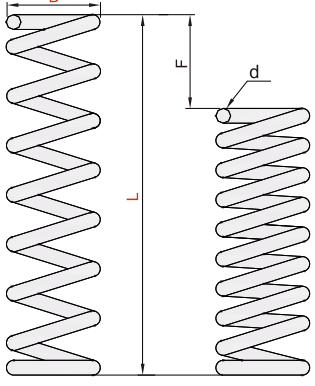

代码	类型	材质		表面处理	允许低移量	弹簧常数公差
		国标	相当			
AWR	外径基准型	琴钢丝	SWP	发黑	L×60%	±10%

■ 外径D公差: Ø10以下-0.5mm~0mm Ø12以上-0.8mm~0mm
■ 长度L公差: 50以下±1.5, 55以上±2.5
压紧长度为参考值, 因批次不同会有偏差, 理论使用次数100万次
两端均未进行磨削加工。

型号		d	压紧长度	Fmax	N(kgf) max	
代码	D					L
AWR	3	5	0.23	1.8	3	0.9
		10	0.25	2.3	6	1.8
		15	0.3	4.8	9	2.6
		20	0.3	4.8	12	3.5
		25	0.32	6.8	15	4.4
		30	0.32	6.8	18	5.3
		35	0.35	11.5	21	6.2
		40	0.35	11.5	24	7.1
	4	5	0.26	1.6	3	0.9
		10	0.29	2.2	6	1.8
		15	0.32	3.2	9	2.6
		20	0.38	6.5	12	3.5
		25	0.38	6.5	15	4.4
		30	0.4	8.4	18	5.3
		35	0.4	8.4	21	6.2
		40	0.45	15	24	7.1
		45	0.45	15	27	7.9
		50	0.45	15	30	8.8
		55	0.45	15	33	9.7
		60	0.5	23.5	36	10.6
		65	0.5	25	39	11.5
		70	0.5	25	42	12.4
	5	5	0.3	1.6	3	0.9
		10	0.35	1.6	6	0.8
		15	0.35	2.8	9	2.6
		20	0.4	4.8	12	3.8
		25	0.45	8	15	4.4
		30	0.45	8	18	5.3
35		0.5	12.5	21	8.2	
40		0.5	12.5	24	7.1	
45		0.55	17.6	27	7.9	
50		0.55	18	30	8.8	
55		0.55	20	33	9.7	
60		0.55	20	36	10.6	
AWR		65	0.55	20.9	39	11.5
		70	0.55	20.9	42	12.4

型号		d	压紧长度	Fmax	N(kgf) max	
代码	D					L
AWR	6	5	0.32	1.6	3	0.9
		10	0.4	3.2	6	1.8
		15	0.4	3.2	9	2.6
		20	0.5	7.5	12	3.5
		25	0.5	7.5	15	4.4
		30	0.5	7.5	18	5.3
		35	0.55	11.5	21	6.2
		40	0.55	11.5	24	7.1
		45	0.6	17.4	27	7.9
		50	0.6	17.4	30	8.8
		55	0.6	17.4	33	9.7
		60	0.6	17.4	36	10.6
		65	0.6	17.4	39	11.5
		70	0.6	17.4	42	12.4
		80	0.65	27.3	48	14.1
	8	10	0.45	2.7	6	1.8
		15	0.5	4	9	2.6
		20	0.5	4	12	3.5
		25	0.55	5.8	15	4.4
		30	0.6	8.4	18	5.3
		35	0.6	8.4	21	6.7
		40	0.6	8.4	24	7.1
		45	0.7	16	27	7.9
		50	0.7	16	30	8.8
		55	0.7	16	33	9.7
		60	0.7	16	36	10.6
		65	0.7	16	39	11.5
		70	0.7	16	42	12.4
		80	0.75	22.9	48	14.1
		10	10	0.55	3.6	6
15	0.6		4.8	9	2.6	
20	0.65		6.5	12	3.5	
25	0.65		6.5	15	4.4	
30	0.7		8.8	18	5.3	
35	0.7		8.8	21	6.2	
40	0.7	8.8	24	7.1		

压缩弹簧 ◀ 外径基准型 (弹簧钢)

型号		d	压紧长度	Fmax	N(kgf) max	
代码	D					L
AWR	10	45	0.8	16	27	7.9
		50	0.8	16	30	8.8
		55	0.8	16	33	9.7
		60	0.85	21	36	10.6
		65	0.85	21	39	11.5
		70	0.85	21	42	12.4
		80	0.9	28.8	48	14.1
		85	0.9	28.8	48	14.1
	12	10	0.6	3.6	6	1.8
		15	0.65	4.6	9	2.6
		20	0.65	4.6	12	3.5
		25	0.7	6	15	4.4
		30	0.7	6	18	5.3
		35	0.7	6	21	6.2
		40	0.8	10.4	24	7.1
		45	0.8	10.4	27	7.9
		50	0.9	17.1	30	8.8
		55	0.9	17.1	33	9.7
		60	0.9	17.1	36	10.6
		65	0.9	17.1	39	11.5
	70	0.9	17.1	42	12.4	
	80	1	28	48	14.1	
	13	10	0.6	3.2	6	1.8
		15	0.7	4.9	9	2.6
		20	0.7	4.9	12	3.5
		25	0.8	8.4	15	4.4
		30	0.8	8.4	18	5.3
		35	0.8	8.4	21	6.2
		40	0.9	13.5	24	7.1
		45	0.9	13.5	27	7.9
		50	0.9	13.5	30	8.8
		55	0.9	13.5	33	9.7
		60	1	22	36	10.6
		65	1	22	39	11.5
		70	1	22	42	12.4
	80	1	22	48	14.1	
	90	1	22	54	15.9	
	14	15	0.7	4.6	9	2.6
		20	0.75	5.6	12	3.5
		25	0.8	7.2	15	4.4
		30	0.8	7.2	18	5.3
		35	0.8	7.2	21	6.2
		40	0.9	11.3	24	7.1
		45	0.9	11.3	27	7.9
		50	0.9	11.3	30	8.8
55		1	18	33	9.7	
60		1	18	36	10.6	
65		1	18	39	11.5	
70		1	18	42	12.4	
80		1.1	28.6	48	14.1	
90		1.1	28.6	54	15.9	
16	15	0.75	4.5	9	2.6	
	20	0.8	5.6	12	3.5	
	25	0.9	8	15	4.4	
	30	0.9	8	18	5.3	
	35	0.9	8	21	6.2	

■ AWR: Fmax(容许位移量) = LX60%



请按图示订货

■ AWR-D3-L10

型号		
代码	D	L
AWR	3	5 10



交期Delivery

4天	发货
----	----

○ 本产品发货时间不含周日