


导向轴 ◀ 带键槽型



代码	类型	D公差	材质		硬度	表面处理
			国标	相当		
GAF11	带键槽型	普通级	f8	0Cr18Ni9 SUS304	—	镀硬铬, 镀层硬度HV850~ 镀层厚度10μm~15μm

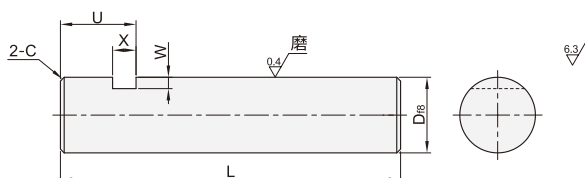

导向轴

01

型号			L	最小单位1 U	X	W	C
代码	D _Φ						
GAF11 (D公差f8)	6	-0.010 -0.028	15~600	U=6~L/2	3.1	2	0.5
	8	-0.013 -0.035	15~800			3	
	10		15~1000				
	12	-0.016 -0.043	20~1000				
	13		25~1200				
	15						
	16						
	18			U=8~L/2	5.1	7	1.0
	20	-0.020 -0.053	30~1200				
	25	30~1500					
	30						



请按图示订货

■ GAF11-D6-L80-U10

型号			
代码	D	L	U
GAF11	6	15~600	U=6~L/2




交期Delivery

5天

发货

○本产品发货时间不含周日

代码	LC	SC ()																																			
技术说明	变更L尺寸公差 选型方法: LC ①最小单位0.1 ②L<300变更为L$\pm$0.03; 300≤L<600变更为L$\pm$0.05; L≥600 变更为L$\pm$0.1 	选型方法: SC10 最小单位1 																																			
		增加1处扳手槽 <table><tr><th>D</th><th>K₁</th><th>K₂</th></tr><tr><td>6</td><td>5</td><td></td></tr><tr><td>8</td><td>7</td><td>6</td></tr><tr><td>10</td><td>8</td><td>—</td></tr><tr><td>12</td><td>10</td><td></td></tr><tr><td>13</td><td>11</td><td></td></tr><tr><td>15</td><td>13</td><td></td></tr><tr><td>16</td><td>14</td><td>11</td></tr><tr><td>18</td><td>16</td><td></td></tr><tr><td>20</td><td>17</td><td></td></tr><tr><td>25</td><td>22</td><td></td></tr><tr><td>30</td><td>27</td><td>16</td></tr></table>	D	K ₁	K ₂	6	5		8	7	6	10	8	—	12	10		13	11		15	13		16	14	11	18	16		20	17		25	22		30	27
D	K ₁	K ₂																																			
6	5																																				
8	7	6																																			
10	8	—																																			
12	10																																				
13	11																																				
15	13																																				
16	14	11																																			
18	16																																				
20	17																																				
25	22																																				
30	27	16																																			

- ①选择2个或以上可选加工时, 各加工部位间隔2mm以上。
 ②可选加工可能会使产品硬度降低。



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台