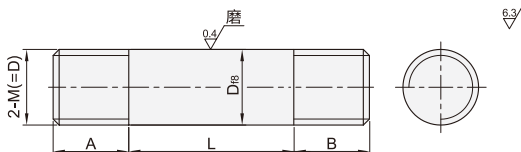


导向轴

同径型
两端外螺纹型.D公差f8.普通级



同径型	精度等级	D公差	材质		硬度	表面处理
			国标	相当		
GEQ11	普通级	f8	45	S45C	—	镀硬铬, 镀层硬度HV850~ 镀层厚度10μm~15μm
—			0Cr18Ni9	SUS304		



导向轴

01



可选加工

代码		技术说明																																																																																																																																																																																																																																																												
变更外螺纹 为细牙螺纹 PC().PS()(细牙螺纹)  QC().QS()(细牙螺纹) 选型方法: PC17 (PC.QC:此细牙螺纹螺距与轴承螺帽的相对应) (PS.QS:此细牙螺纹螺距与气缸的相对应) <table><tr><td colspan="10"></td><td colspan="2"></td></tr><tr><td>6</td><td>3</td><td>4</td><td>5</td><td>6</td><td colspan="5"></td><td></td><td></td></tr><tr><td>8</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td colspan="5"></td><td></td><td></td></tr><tr><td>10</td><td>-</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td colspan="5"></td><td>10</td><td></td></tr><tr><td>12</td><td>-</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td colspan="5"></td><td>10</td><td>12</td></tr><tr><td>13</td><td>-</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td colspan="5"></td><td>10</td><td></td></tr><tr><td>15</td><td>-</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td colspan="5"></td><td>10</td><td>12</td></tr><tr><td>16</td><td>-</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td colspan="5"></td><td>10</td><td>12</td><td>14</td></tr><tr><td>18</td><td>-</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td colspan="5"></td><td>10</td><td>12</td><td>14</td><td>18</td></tr><tr><td>20</td><td>-</td><td>-</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td colspan="5"></td><td>10</td><td>12</td><td>14</td><td>18</td></tr><tr><td>25</td><td>-</td><td>-</td><td>-</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td colspan="5"></td><td>10</td><td>12</td><td>14</td><td>18</td></tr><tr><td>30</td><td>-</td><td>-</td><td>-</td><td>10</td><td>15</td><td>17</td><td>20</td><td colspan="5"></td><td>25</td><td>10</td><td>12</td><td>14</td><td>18</td></tr><tr><td>35</td><td>-</td><td>-</td><td>-</td><td>15</td><td>17</td><td>20</td><td colspan="5"></td><td>25</td><td>30</td><td>10</td><td>12</td><td>14</td><td>18</td></tr><tr><td>40</td><td>-</td><td>-</td><td>-</td><td>15</td><td>17</td><td>20</td><td colspan="5"></td><td>25</td><td>30</td><td colspan="3">12</td><td>14</td><td>18</td></tr><tr><td>50</td><td>-</td><td>-</td><td>-</td><td>15</td><td>17</td><td>20</td><td colspan="5"></td><td>25</td><td>30</td><td colspan="3">14</td><td>18</td></tr><tr><td colspan="10">螺距</td><td>0.35</td><td>0.5</td><td>0.75</td><td>1.0</td><td>1.5</td><td>1.25</td><td>1.5</td></tr></table> ①指定时请将P尺寸变更为PC(PS) 指定时请将Q尺寸变更为QC(QS) ②P尺寸与PC(PS)变为相同尺寸 Q尺寸与QC(QS)变为相同尺寸 ③仅适用于标准型														6	3	4	5	6								8	3	4	5	6	8								10	-	4	5	6	8	10						10		12	-	5	6	8	10	12						10	12	13	-	5	6	8	10	12						10		15	-	5	6	8	10	12						10	12	16	-	5	6	8	10	12	15						10	12	14	18	-	5	6	8	10	12	15						10	12	14	18	20	-	-	6	8	10	12	15	17						10	12	14	18	25	-	-	-	8	10	12	15	17	20						10	12	14	18	30	-	-	-	10	15	17	20						25	10	12	14	18	35	-	-	-	15	17	20						25	30	10	12	14	18	40	-	-	-	15	17	20						25	30	12			14	18	50	-	-	-	15	17	20						25	30	14			18	螺距										0.35	0.5	0.75	1.0	1.5	1.25	1.5
		6	3	4	5	6																																																																																																																																																																																																																																																								
		8	3	4	5	6	8																																																																																																																																																																																																																																																							
		10	-	4	5	6	8	10						10																																																																																																																																																																																																																																																
		12	-	5	6	8	10	12						10	12																																																																																																																																																																																																																																															
		13	-	5	6	8	10	12						10																																																																																																																																																																																																																																																
		15	-	5	6	8	10	12						10	12																																																																																																																																																																																																																																															
		16	-	5	6	8	10	12	15						10	12	14																																																																																																																																																																																																																																													
		18	-	5	6	8	10	12	15						10	12	14	18																																																																																																																																																																																																																																												
20	-	-	6	8	10	12	15	17						10	12	14	18																																																																																																																																																																																																																																													
25	-	-	-	8	10	12	15	17	20						10	12	14	18																																																																																																																																																																																																																																												
30	-	-	-	10	15	17	20						25	10	12	14	18																																																																																																																																																																																																																																													
35	-	-	-	15	17	20						25	30	10	12	14	18																																																																																																																																																																																																																																													
40	-	-	-	15	17	20						25	30	12			14	18																																																																																																																																																																																																																																												
50	-	-	-	15	17	20						25	30	14			18																																																																																																																																																																																																																																													
螺距										0.35	0.5	0.75	1.0	1.5	1.25	1.5																																																																																																																																																																																																																																														

注: 选择多个可选加工时, 加工部位之间需隔2mm以上。

型号			最小单位1		M
代码	D f8		L	A.B	
(D公差f8) GEQ11	6	-0.010 -0.028	20-600	5~30	6
	8	-0.013 -0.035	20-800	7~40	8
	10	-0.016 -0.043	20-1000	8~50	10
	12	-0.016 -0.043	20-1200	9~60	12
	16	-0.020 -0.053	20-1500	10~80	16
	20	-0.020 -0.053	20-1500	13~100	20
	30	-0.020 -0.053	20-1500	18~150	30

可选加工

代码	技术说明																																									
LC	变更L尺寸公差 选型方法: LC ①最小单位0.1 	②$L < 200$变更为$L \pm 0.03$ ③$200 \leq L < 500$变更为$L \pm 0.05$ ④$L \geq 500$变更为$L \pm 0.1$ ⑤仅适用于标准型																																								
SD()	增加2个扳水槽 P侧  ①指定单位1 ②$SD + X + K_2 \times 2 < L$ ③$SD = 0$或$SD \geq 1$ $X = 0$或$X \geq 1$ ④2处扳水槽的位置不在同一平面上。 ⑤仅适用于标准型	选型方法: SD12-X8 <table><tr><th>D</th><th>K₁</th><th>K₂</th><th>D</th><th>K₁</th><th>K₂</th></tr><tr><td>6</td><td>5</td><td rowspan="3">9</td><td>18</td><td>16</td><td rowspan="3">11</td></tr><tr><td>8</td><td>7</td><td>20</td><td>17</td></tr><tr><td>10</td><td>8</td><td>25</td><td>22</td></tr><tr><td>12</td><td>10</td><td rowspan="3">11</td><td>30</td><td>27</td><td rowspan="3">16</td></tr><tr><td>13</td><td>11</td><td>35</td><td>30</td></tr><tr><td>15</td><td>13</td><td>40</td><td>36</td></tr><tr><td>16</td><td>14</td><td></td><td>50</td><td>41</td><td>21</td></tr></table>	D	K ₁	K ₂	D	K ₁	K ₂	6	5	9	18	16	11	8	7	20	17	10	8	25	22	12	10	11	30	27	16	13	11	35	30	15	13	40	36	16	14		50	41	21
D	K ₁	K ₂	D	K ₁	K ₂																																					
6	5	9	18	16	11																																					
8	7		20	17																																						
10	8		25	22																																						
12	10	11	30	27	16																																					
13	11		35	30																																						
15	13		40	36																																						
16	14		50	41	21																																					
SC()	增加1个扳水槽 	选型方法: SC5 ①最小单位1 ②仅适用同径型 <table><tr><th>D</th><th>K₁</th><th>K₂</th></tr><tr><td>6</td><td>5</td><td rowspan="3">6</td></tr><tr><td>8</td><td>7</td></tr><tr><td>10</td><td>8</td></tr><tr><td>12</td><td>10</td><td rowspan="3">11</td></tr><tr><td>16</td><td>14</td></tr><tr><td>20</td><td>17</td></tr><tr><td>30</td><td>27</td><td>16</td></tr></table>	D	K ₁	K ₂	6	5	6	8	7	10	8	12	10	11	16	14	20	17	30	27	16																				
D	K ₁	K ₂																																								
6	5	6																																								
8	7																																									
10	8																																									
12	10	11																																								
16	14																																									
20	17																																									
30	27	16																																								



请按图示订货

GEQ11-D6-L100-A10-B10-M6

型号	D	L	A.B	M
代码				
GEQ11	6	20~600	5~30	6



交期Delivery

5天

发货

○本产品发货时间不含周日



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!