


悬臂销 ◀ 带挡圈槽型 内螺纹安装型




代码			材质		表面处理
标准型	台阶型	六角型	国标	相当	
MXC01	MXC11	MXC21	45	S45C	发黑
MXC02	MXC12	MXC22			无电解镀锌
MXC06	MXC16	MXC26	0Cr18Ni9	SUS304	/


标准型 MXC01/02/06

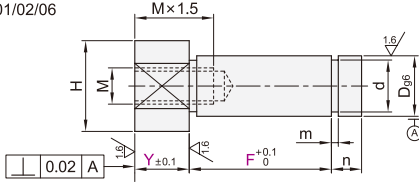


标准型, $Y \geq 17$ 时
两平面宽度尺寸




台阶型, $W < V$, $Y \geq 17$ 时
两平面宽度尺寸



台阶型 MXC11/12/16

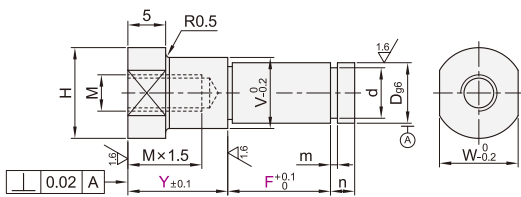




六角型 MXC21/22/26

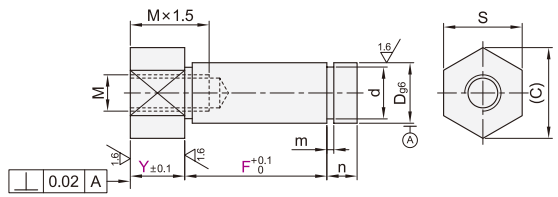

型号	代码	规格	Dg6	最小单位1	Y	F	M	H	W	d	m	n
标准型 MXC01 MXC02 MXC06	6	6	-0.004 -0.012	5~110	2~65	M3	10	8	5	+0.075 0	0.7	2
	8	8	-0.005 -0.014				12	10	7	+0.090 0	0.9	3
	10	10	-0.006 -0.017				15	13	9.6	+0.090 0	1.15	4
	12	12					17	14	11.5	0		
	13	13					18	15	12.4	0		
	15	15					20	17	14.3	0		
	16	16		10~160	4~80	M10	21	18	15.2	0		
	17	17					23	20	16.2	0		
	18	18					26	24	19	0		
	20	20					28	26	21	0		
	22	22					31	27	23.9	0		
	25A	25	-0.007 -0.020				36	32	28.6	0		
	30	30				M12						
	30A	30				M16						

型号	代码	规格	Dg6	最小单位1	Y	F	M	S	(C)	d	m	n
台阶型 MXC11 MXC12 MXC16	6	6	-0.004 -0.012	5~110	7~65	M3	8	9.2	5	+0.075 0	0.7	2
	8	8	-0.005 -0.014				10	11.5	7	+0.090 0	0.9	3
	10	10	-0.006 -0.017				13	15	9.6	+0.090 0	1.15	4
	12	12					14	16.2	11.5	0		
	13	13					17	19.6	12.4	0		
	15	15					18	21.9	14.3	0		
	16	16		10~160	7~80	M10	19	21.9	15.2	0		
	17	17					21	24	16.2	0		
	18	18					24	27.7	19	0		
	20	20					27	31.2	23.9	0		
	22	22					32	36.9	28.6	0		
	25	25	-0.007 -0.020									
	25A	25				M12						
	30	30				M16						
	30A	30				M16						

型号	代码	规格	Dg6	最小单位1	Y	F	M	V	H	W	d	m	n
六角型 MXC21 MXC22 MXC26	6	6	-0.004 -0.012	5~110	2~65	M3	8	10	8	5	+0.075 0	0.7	2
	8	8	-0.005 -0.014				10	12	10	7	+0.090 0	0.9	3
	10	10	-0.006 -0.017				13	15	13	9.6	+0.090 0	1.15	4
	12	12					15	17	14	11.5	0		
	13	13					16	18	15	12.4	0		
	15	15					18	20	17	14.3	0		
	16	16		10~160	4~75	M10	19	21	18	15.2	0		
	17	17					20	23	20	16.2	0		
	18	18					21	26	24	19	0		
	20	20					26	28	26	21	0		
	22	22					29	31	27	23.9	0		
	25	25	-0.007 -0.020				34	36	32	28.6	0		
	25A	25				M12							
	30	30				M16							
	30A	30				M16							

代码	技术说明																																										
YC	变更Y尺寸公差 	选型方法 YC ① 变更Y尺寸公差为±0.04																																									
WC	变更为四面扳手槽 	选型方法 WC ① 六角型不适用。																																									
ME	附带挡圈	选型方法 ME ① 规格6~8:E型挡圈 规格10~30A:C型挡圈																																									
AD	增加引导部 	选型方法 AD ① 在如左图所示位置增加引导部 <table><tr><th>规格</th><th>M</th><th>ADg6</th></tr><tr><td>6</td><td>M3</td><td>6</td></tr><tr><td>8</td><td>M4</td><td>8</td></tr><tr><td>10</td><td>M6</td><td>10</td></tr><tr><td>12</td><td rowspan="4">M8</td><td>12</td></tr><tr><td>13</td><td>13</td></tr><tr><td>15</td><td>15</td></tr><tr><td>16</td><td>16</td></tr><tr><td>17</td><td rowspan="3">M10</td><td>17</td></tr><tr><td>18</td><td>18</td></tr><tr><td>20</td><td>20</td></tr><tr><td>22</td><td>M12</td><td>22</td></tr><tr><td>25</td><td>M16</td><td rowspan="2">25</td></tr><tr><td>25A</td><td>M12</td></tr><tr><td>30</td><td>M20</td><td rowspan="2">30</td></tr><tr><td>30A</td><td>M16</td></tr></table>	规格	M	ADg6	6	M3	6	8	M4	8	10	M6	10	12	M8	12	13	13	15	15	16	16	17	M10	17	18	18	20	20	22	M12	22	25	M16	25	25A	M12	30	M20	30	30A	M16
规格	M	ADg6																																									
6	M3	6																																									
8	M4	8																																									
10	M6	10																																									
12	M8	12																																									
13		13																																									
15		15																																									
16		16																																									
17	M10	17																																									
18		18																																									
20		20																																									
22	M12	22																																									
25	M16	25																																									
25A	M12																																										
30	M20	30																																									
30A	M16																																										



请按图示订货



MXC01-6-Y2-F5-YC

型号	Y	F	可选加工
代码 规格	2~65	5~110	YC WC AD ME

交期Delivery
5天 发货
○本产品发货时间不含周日