


# 垫圈 ◀ 圆螺母用止动垫圈



| 型号                                     |      | d    | dc  | D <sub>1</sub> | T    | h   | b   | a  |  |  |  |
|----------------------------------------|------|------|-----|----------------|------|-----|-----|----|--|--|--|
| 代码                                     | 规格   |      |     |                |      |     |     |    |  |  |  |
| (碳钢)<br>YBY41<br><br>(SUS304)<br>YBY42 | 10   | 10.5 | 25  | 16             | 1    | 3   | 3.8 | 8  |  |  |  |
|                                        | 12   | 12.5 | 28  | 19             |      |     |     | 9  |  |  |  |
|                                        | 14   | 14.5 | 32  | 20             |      |     |     | 11 |  |  |  |
|                                        | *16  | 16.5 | 34  | 22             |      | 4   | 4.8 | 13 |  |  |  |
|                                        | 18   | 18.5 | 35  | 24             |      |     |     | 15 |  |  |  |
|                                        | *20  | 20.5 | 38  | 27             |      |     |     | 17 |  |  |  |
|                                        | 22   | 22.5 | 42  | 30             |      |     |     | 19 |  |  |  |
|                                        | *24  | 24.5 | 45  | 34             |      | 5   | 5.7 | 21 |  |  |  |
|                                        | 25   | 25.5 |     |                |      |     |     | 22 |  |  |  |
|                                        | *27  | 27.5 | 48  | 37             |      |     |     | 24 |  |  |  |
|                                        | 30   | 30.5 | 52  | 40             |      |     |     | 27 |  |  |  |
|                                        | *33  | 33.5 | 56  | 43             |      |     |     | 30 |  |  |  |
|                                        | *35  | 35.5 |     |                |      |     |     | 32 |  |  |  |
|                                        | *36  | 36.5 | 60  | 46             |      | 6   | 7.7 | 33 |  |  |  |
|                                        | 39   | 39.5 | 62  | 49             |      |     |     | 36 |  |  |  |
|                                        | *40  | 40.5 |     |                |      |     |     | 37 |  |  |  |
|                                        | 42   | 42.5 | 66  | 53             |      |     |     | 39 |  |  |  |
|                                        | *45  | 45.5 | 72  | 59             |      |     |     | 42 |  |  |  |
|                                        | *48  | 48.5 | 76  | 61             |      |     |     | 45 |  |  |  |
|                                        | 50   | 50.5 |     |                |      |     |     | 47 |  |  |  |
|                                        | 52   | 52.5 | 82  | 67             |      |     |     | 49 |  |  |  |
|                                        | 55   | 56   |     |                |      |     |     | 52 |  |  |  |
|                                        | *56  | 57   | 90  | 74             |      | 53  |     |    |  |  |  |
|                                        | *60  | 61   | 94  | 79             |      | 57  |     |    |  |  |  |
|                                        | *64  | 65   | 100 | 84             |      |     |     | 61 |  |  |  |
|                                        | 65   | 66   |     |                |      |     |     | 62 |  |  |  |
|                                        | *68  | 69   | 105 | 88             |      | 7   | 9.6 | 65 |  |  |  |
|                                        | 72   | 73   | 110 | 93             |      |     |     | 69 |  |  |  |
|                                        | 76   | 77   | 115 | 98             |      |     |     | 72 |  |  |  |
|                                        | 80   | 81   | 120 | 103            |      |     |     | 76 |  |  |  |
|                                        | 85   | 86   | 125 | 108            |      |     |     | 81 |  |  |  |
|                                        | 90   | 91   | 130 | 112            | 11.6 |     | 86  |    |  |  |  |
|                                        | 95   | 96   | 135 | 117            |      |     | 91  |    |  |  |  |
|                                        | 100  | 101  | 140 | 122            |      |     | 96  |    |  |  |  |
|                                        | 105  | 106  | 145 | 127            |      |     | 101 |    |  |  |  |
|                                        | 110  | 111  | 156 | 135            |      |     | 106 |    |  |  |  |
|                                        | 115  | 116  | 160 | 140            | 13.5 | 111 |     |    |  |  |  |
|                                        | *120 | 121  | 166 | 145            |      | 116 |     |    |  |  |  |
|                                        | *125 | 126  | 170 | 150            |      | 121 |     |    |  |  |  |
|                                        | *130 | 131  | 176 | 155            |      | 126 |     |    |  |  |  |
|                                        | 140  | 141  | 186 | 165            |      | 136 |     |    |  |  |  |

注：带 \* 号规格仅适用 YBY41 (碳钢)。

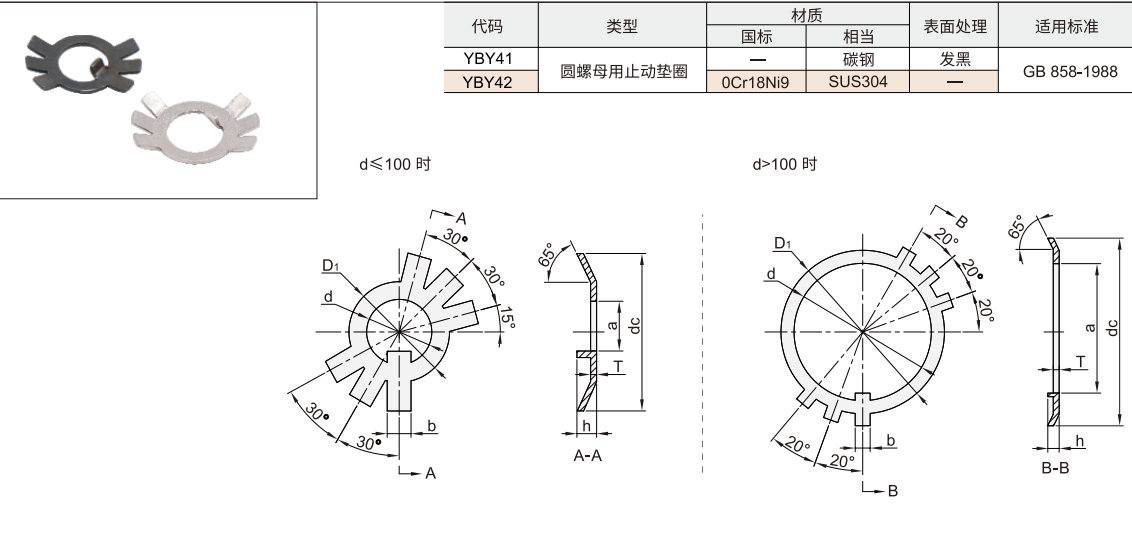

## YBY41-10

| 型号    |    |
|-------|----|
| 代码    | 规格 |
| YBY41 | 10 |
| YBY42 | 12 |



交期Delivery

|               |    |
|---------------|----|
| 3天            | 发货 |
| ○ 本产品发货时间不含周日 |    |