


轴用挡圈 ◀ E型 弹簧钢/不锈钢 国标



代码	类型	材质	表面处理	适用标准
YCS31	E型轴用挡圈	65Mn(弹簧钢)	发黑	GB/T 894.1-1986
YCS32		SUS304		

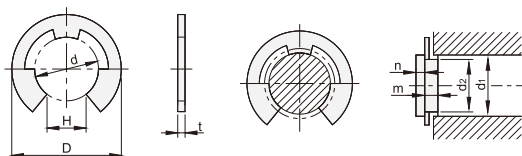

型号		公称直径	极限 偏差	挡圈尺寸				安装沟槽尺寸				轴径		
代码	规格			H		t		Dmax	d ₂		m		n≥	d ₁ >
				基本尺寸	极限偏差	基本尺寸	极限偏差		基本尺寸	极限偏差	基本尺寸	极限偏差		
YCS31 YCS32	1.2*	1.2	0 -0.14	0.9	±0.08	0.3	+0.03 -0.06	3	1.2	+0.06 0	0.4	+0.14 0	1.0	1.5-2
	1.5	1.5		1.2	±0.125	0.4		4	1.5		0.5		2-2.5	
	2	2		1.7				5	2.0				2.5-3	
	2.5	2.5		2.2				6	2.5		0.7		3-3.5	
	3	3		2.5		0.6	+0.04 -0.07	7	3.0	3.5-4				
	3.5*	3.5		3.0				8	3.5	4-5				
	4	4	0 -0.18	3.5	±0.15	0.8	+0.04 -0.10	+0.075 0	0.9	+0.14 0	1.5	5-6		
	5	5		4.5							10	5.0	6-7	
	6	6		5.5		1.0			+0.05 -0.13		12	6.0	7-9	
	8	8	7.5	16	8.0		1.1	1.8			9-10			
	9	9	0 -0.22	8.0	18			9.0			2.0	10-13		
	12	12	0 -0.27	10.5	±0.215		1.2	+0.06 -0.15			24	12.0	+0.11 0	1.3
	15	15		13.0		1.5	30		15.0		1.6	3.0		16-20

带*尺寸不适用于YCS32

■ YCS31-1.5



请按图示订货

型号	
代码	规格
YCS31	1.5



交期Delivery

3天

发货

○ 本产品发货时间不含周日