


感应电机/可逆电机 ◀ 60W □90mm



ZD




代码	规格1				规格2		
	5IK60GN				S	C	F
ZDA05	5RK60GN				电压	配件	
	电动机尺寸mm	类型名称	功率W	轴类			
	5:表示90	IK:感应电动机 RK:可逆电动机	60	GN型齿轴			

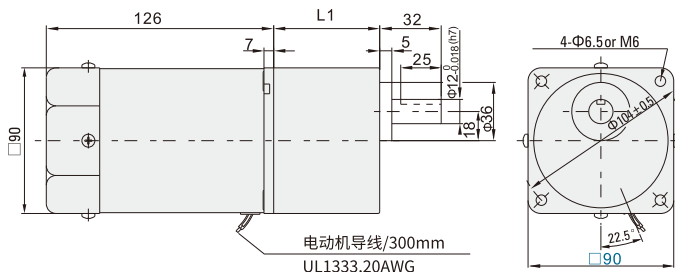

■ 接线示意图 60W, 1ph100V/110V/120V/220V/230V



■ 60W, 3ph220V/380V



注: 60W以上默认带风扇

■ 感应电机特性表-连续额定

导线型		输出功率 W	电压 V	频率 Hz	电流 A	启动转矩 mN.m	额定转矩 mN.m	额定转速 r/min	电容量 / 耐压 μF
齿轮轴型	圆轴型								
5IK60GN-AF	5IK60A-AF	60	1ph100	50	1.00	320	470	1250	20.0
				60	1.10				
5IK60GN-EF	5IK60A-EF		1ph 110	60	0.80	300	380	1550	12.0
				60	0.85				
5IK60GN-CF	5IK60A-CF		1ph 220	50	0.50	340	470	1250	4.0
				50	0.55				
5IK60GN-HF	5IK60A-HF		1ph 230	60	0.50	380	1550	4.0	4.0
				60	0.55				
5IK60GN-SF	5IK60A-SF		3ph 220	50	0.45	1000	470	1250	\
				60	0.40	800	380	1550	
5IK60GN-S3F	5IK60A-S3F		3ph 380	50	0.26	1000	470	1250	\
				60	0.23	800	380	1550	

■ 可逆电机特性表-30分钟额定

导线型		输出功率 W	电压 V	频率 Hz	电流 A	启动转矩 mN.m	额定转矩 mN.m	额定转速 r/min	电容量 / 耐压 μF
齿轮轴型	圆轴型								
5RK60GN-AF	5RK60A-AF	60	1ph100	50	1.26	470	470	1250	25.0
				60	1.70				
5RK60GN-EF	5RK60A-EF		1ph 110	60	1.05	330	380	1550	15.0
				60	1.05				
5RK60GN-CF	5RK60A-CF		1ph 220	50	0.55	420	470	1250	4.50
				50	0.60				
5RK60GN-HF	5RK60A-HF		1ph 230	60	0.55	420	380	1550	4.50
				60	0.60				

■ 容许力矩单位 (上段: N.m / 下段: kgf.cm)

电动机/减速机	减速比	转速																	
		50Hz	60Hz	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30
5I(R)K60GN-AF	5I(R)K60GN-EF	1.1	1.4	1.9	2.3	2.9	3.4	3.57	4.8	5.7	6.8	7.03	8.6						10
5I(R)K60GN-CF	5I(R)K60GN-HF	11.2	14.2	19.3	23.4	29.6	34.7	36.4	48.9	58.1	69.3	71.7	87.7						100
5IK60GN-SF	5IK60GN-S3F	0.92	1.1	1.5	1.8	2.3	2.8	2.99	3.8	4.6	5.5	5.70	6.9	8.3					10
		9.38	11.2	15.3	18.3	23.4	28.5	30.5	38.7	46.9	56.1	58.2	70.1	84.7					100



请按图示订货

■ ZDA05-5IK60GN-SF-5GN20K

代码	规格1	规格2	速比
ZDA05	5IK60GN	SF	5GN20K (20:20比)
		CF	
	5RK60GN	SF	
		CF	

■ ZDA05-5IK60A-AF

代码	规格1	规格2
ZDA05	4IK25A	S
		C
	4RK25A	S
		C



交期Delivery

5天

发货

○本产品发货时间不含周日

齿
轮
减
速
机
53