





代码	类型	材质				
		护套	发热丝	引出线	线缆	绝缘粉末
AXF91	通用型	SUS321	Ni80Cr20	纯镍耐热线	Ni-GB	MgO
AXF92	内出线型	SUS321	Ni80Cr20	纯镍耐热线	Ni-GB	MgO

通用型
AXF91

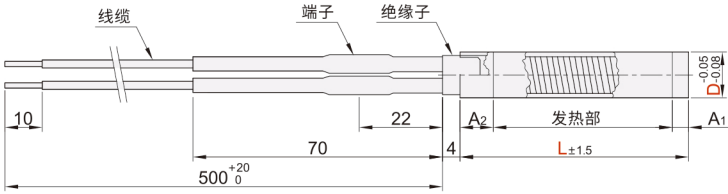

内出线型
AXF92

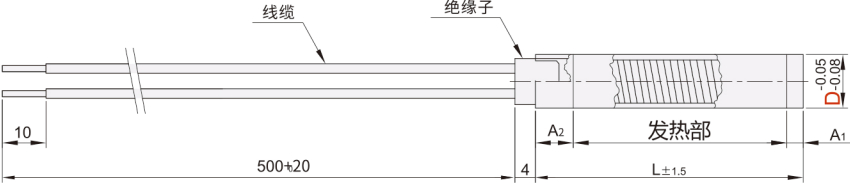

■通用型

型号		L	额定功率 W±5%	额定电压 V±5%	冷端长度 A	发热部长度
代码	D					
AXF91	5	30	40	220	A=A1+A2 30≤L≤60时 A1=5mm, A2=5mm 60<L≤150时 A1=7mm, A2=10mm	L-A
		40	40			
		40	60			
		50	50			
		60	100			
	6	80	150			
		30	50			
		40	80			
		50	100			
		60	130			
	6.25	100	100			
		100	120			
	8	30	60			
		50	100			
		100	150			
	10	50	200			
		100	350			
	12	50	120			
		100	400			
		100	300			
		150	500			

■内出线型

型号		L	额定功率 W±5%	额定电压 V±5%	冷端长度 A	发热部长度
代码	D					
AXF92	8	60	100	220	A=A1+A2 L=60时 A1=5mm, A2=5mm 60<L≤150时 A1=7mm, A2=10mm	L-A
		80	120			
		80	150			
		100	200			
		150	300			
	10	150	350			
		60	120			
		80	150			
		80	180			
		100	200			
	12	150	250			
		150	300			
		150	450			
		60	100			
		80	150			
		80	250			
		100	300			
		150	300			
		150	500			



■ AXF91-D6-L80-W100-V220

代码	D	L	额定功率 W±5%	额定电压 V±5%
AXF91	6	80	100	220



交期Delivery

5天

发货

○ 本产品发货时间不含周日