


# 树脂直齿轮 ◀ 模数 0.5/0.8/1.0/1.5/2.0/2.5/3.0 · 压力角 20°


齿轮 / 齿条  
19

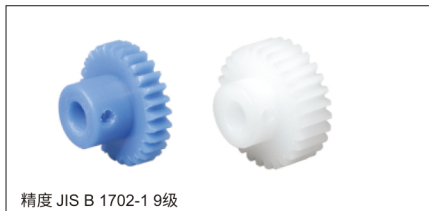


精度 JIS B 1702-1 9级

代码	类型	材质	
		齿轮	金属芯
FZR01	树脂直齿轮	尼龙(MC901)	S45C
FZR02			SUS304
FZR03			SUS304
FZR21	树脂直齿轮	聚甲醛	S45C
FZR22			SUS304
FZR23			SUS304


■ 顶丝螺纹孔追加加工



A形




FZR01 FZR21




FZR02 FZR03 FZR22 FZR23

B形



FZR01 FZR21



FZR02 FZR03 FZR22 FZR23

型号		齿数	B	齿轮形状	内孔直径P <sub>H7</sub>		D	d	Q	P <sub>1</sub>	F	F <sub>1</sub>	M	容许传递力(N.m) 弯曲强度	
代码	模数				无金属芯 最小单位1	含金属芯								MC尼龙	聚甲醛
FZR01 FZR21	0.5	20	3	B	3~5	11	10	8.5	10	8	(B=3)	2.5	M3	0.04	0.16
		24					12							0.05	0.21
		25					12.5							0.05	0.22
		28					14							0.06	0.26
		30					15							0.07	0.30
		32					16							0.07	0.32
		36	17	0.09	0.37										
		40	18	0.10	0.42										
		45	20	0.12	0.50										
		48	21	0.13	0.53										
		50	22.5	0.14	0.57										
		56	25	0.16	0.65										
	60	26	0.17	0.71											
	64	29	0.19	0.76											
	70	31	0.21	0.84											
	72	32	0.20	0.87											
	80	33	0.23	0.97											
	90	37	0.26	1.11											
	100	41	0.30	1.25											
	120	51	0.37	1.53											
	FZR01 FZR21	0.8	16	5	B	4~7	14.4	12.8	10	14	14	3	M3	0.13	0.56
			18					14.4						0.16	0.65
			20					16						0.18	0.77
			24					17.6						0.24	0.97
25			19.2					0.25						1.02	
28			21.6					0.29						1.18	
30			22.4	0.32	1.27										
32			24	0.34	1.40										
36			25.6	0.40	1.63										
40			27.2	0.45	1.87										
45			30.4	0.53	2.16										
48			33.6	0.58	2.34										
50		36	0.61	2.47											
56		40	0.70	2.83											
60		41.6	0.76	3.10											
64		46.4	0.83	3.31											
70		49.6	0.90	3.64											
72		52.8	0.93	3.76											
80		57.6	1.06	4.22											
90		65.6	1.20	4.81											
100		73.6	1.36	5.41											
120		97.6	1.65	6.56											
FZR01 FZR02 FZR03 FZR21 FZR22 FZR23		1.0	18	10	A B	8~10	20	18	15	P+4	20	4	M4	0.51	1.83
			20					20						0.60	2.11
	22		22					0.67						2.40	
	24		24					0.76						2.67	
	25		26					0.80						2.82	
	26		27					0.84						2.97	
	28		28	0.92	3.26										
	30		30	1.01	3.54										
	32		32	1.10	3.86										
	35		34	1.23	4.33										
	37		35												

# 树脂直齿轮 ◀ 模数 0.5/0.8/1.0/1.5/2.0/2.5/3.0 · 压力角 20°

齿轮 / 齿条  
19

型号		齿数	B	齿轮形状	内孔直径P <sub>H7</sub>		D	d	Q	P <sub>1</sub>	F	F <sub>1</sub>	M	容许传递力(N.m) 弯曲强度					
代码	模数				无金属芯 最小单位1	含金属芯								MC尼龙	聚甲醛				
FZR01 FZR02 FZR03 FZR21 FZR22 FZR23	1.0	36	10	A B	10~19	10	12	15	28	P+4	20	4	M4	1.28	4.50				
		40					12							1.46	5.13				
		45					15							1.70	5.93				
		48					18							1.84	6.43				
		50					20							1.94	6.78				
		55					24							2.18	7.61				
		60	26	2.42	8.47														
		70	30	2.86	10.00														
		75	35	3.10	10.76														
		80	40	3.30	11.57														
		90	45	3.78	13.17														
		100	50	4.25	14.82														
	120	60	5.15	17.97															
	15	15	8~12	8	25.5	22.5	18	P+4	24	4.5	M3	1.38	3.16						
	16											8	10	27	24	20	1.53	3.5	
	18											10	12	30	27	22	1.79	4.08	
	20											12	15	33	30	25	2.07	4.73	
	24											15	18	39	36	30	2.61	5.97	
	25											16	20	40.5	37.5	30	2.76	6.3	
	26		17	22	42	39	32	2.91	6.65										
	28		18	24	45	42	34	3.18	7.27										
	30		20	26	48	45	35	3.46	7.9										
	32		22	28	51	48	35	3.76	8.58										
	35		24	30	55.5	52.5	40	4.22	9.63										
36	25		32	57	54	40	4.38	10											
40	30	40	63	60	45	5	11.42												
45	35	45	70.5	67.5	45	5.78	13.2												
48	40	50	75	72	45	6.27	14.31												
50	42	50	78	75	45	6.6	15.08												
60	50	60	93	90	50	8.24	18.83												
70	60	70	108	105	50	9.72	22.21												
80	70	80	123	120	55	11.25	25.7												
12	20	10~12	10	28	24	18	P+4	34	7	M4	2.25	2.45							
14											10	32	28	20	2.96	3.23			
15											10	34	30	24	3.28	3.59			
16											10	36	32	25	3.63	3.97			
18											12	40	36	30	4.24	4.63			
20											15	44	40	33	4.91	5.36			
24		20	52	48	40	6.19	6.77												
25		22	54	50	45	6.54	7.15												
28		25	60	56	45	7.54	8.24												
30		28	64	60	48	8.2	8.96												
32		30	68	64	50	8.91	9.73												
35		35	74	70	50	9.99	10.92												
36	36	76	72	50	10.38	11.34													
40	40	84	80	60	11.86	12.95													
45	45	94	90	60	13.7	14.97													
48	50	100	96	60	14.85	16.23													
50	50	104	100	60	15.65	17.1													
60	60	124	120	60	19.54	21.35													
FZR01 FZR02 FZR03 FZR21	2.5	12	25	A B	10~16	10	35	30	23	P+6	37	6	M5	4.39					
		14												10	40	35	25	5.77	
		15												10	42.5	37.5	30	6.41	
		16												12	45	40	32	7.09	
		18												15	50	45	38	8.28	
		20												18	55	50	40	9.59	
		22	20	60	55	44	10.84												
		24	22	65	60	48	12.1												
		25	25	67.5	62.5	50	12.78												
		30	30	75	70	60	14.73												
		32	32	80	75	65	16.02												
		35	35	85	80	65	17.4												
	36	36	92.5	87.5	65	19.52													
	40	40	95	90	70	20.27													
	45	45	105	100	70	23.15													
	48	50	117.5	112.5	70	26.76													
	50	50	125	120	70	29.01													
	60	60	130	125	70	30.57													
	12	30	12~19	12	42	36	28	P+6	45	7.5	M5	7.58							
	14											12	48	42	32	9.98			
	15											12	51	45	36	11.08			
	16											15	54	48	38	12.25			
	18											18	60	54	40	14.31			
	20											20	66	60	50	16.56			
22	22		72	66	54	18.72													
24	24		78	72	58	20.9													
25	25		81	75	60	22.08													
28	28		90	84	70	25.45													
30	30		96	90	70	27.68													
32	32		102	96	75	30.06													
35	35	111	105	75	33.73														
36	36	114	108	80	35.02														
40	40	126	120	80	40.01														
45	45	141	135	80	46.25														

请按图示订货

**■ FZR01-2.5-30-B25-A-P15**

型号		齿数	B	齿轮形状	内孔直径P <sub>H7</sub> 最小单位1	
代码	模数				无金属芯 最小单位1	含金属芯
FZR01	2.5	30	25	A B	12~45	12 15 20 25 30

交期Delivery

<b>7</b> 天	发货
------------	----

本产品发货时间不含周日