
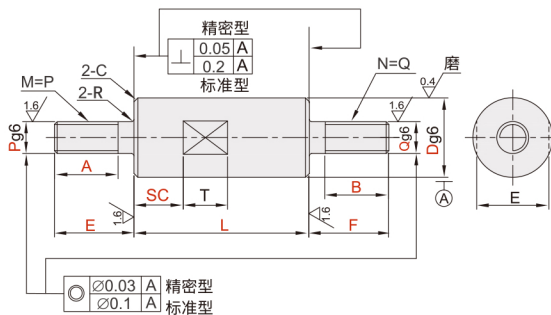


线性导向轴 ◀ 两端外螺纹带扳手槽型 · 标准型/精密型

	代码		D 公差	材质	硬度	表面处理
	标准型	精密型				
	GBS51	GBS71	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有效硬化层 淬火硬度 Gcr15, HRC56~ S45C HRC56~ 9Cr18Mo HRC54~	/
	GBS52	GBS72				镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
	GBS56	GBS76				/
GBS57	GBS77	GB:9Cr18Mo JIS:相当于SUS440C	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm			



型号		最小单位1			P-Q 选择		扳手槽尺寸			R	C
代码	Dg6	L	X-Z	A·B			SC	E	T		
标准型 GBS51 GBS52 GBS56 GBS57	6	-0.004 -0.012	20~600	X=2~P×5 Z=2~Q×5	根据使用 要求指定	3 4 5	最小单位 1mm	5	9	0.5	
	8	-0.005	20~800			3 4 5 6		7			
	10	-0.014	20~800			4 5 6 8		8			
	12		20~1000			5 6 8 10		10			
	13	-0.006	20~1000			5 6 8 10 12		11			
	15	-0.017	20~1000			5 6 8 10 12		13			
	16		20~1200			5 6 8 10 12		14			
	18		20~1200			5 6 8 10 12 16		16			
	20	-0.007	20~1200			6 8 10 12 16		17			
	25	-0.020	20~1500			8 10 12 16 20 24		22			
	30		20~1500			8 10 12 16 20 24		27			
	35	-0.009	20~1500			10 12 16 20 24 30		30			
	40	-0.025	20~1500			12 16 20 24 30		36			
	50		20~1500			16 20 24 30		41			
	精密型 GBS71 GBS72 GBS76 GBS77	6	-0.004 -0.012			20~300		X=2~P×5 Z=2~Q×5	根据使用 要求指定		3 4
8		-0.005	20~350	3 4 5 6	7						
10		-0.014		4 5 6 8	8						
12				5 6 8 10	10						
13		-0.006	20~350	5 6 8 10	11						
15		-0.017		5 6 8 10 12	13						
16				5 6 8 10 12	14						
18			20~450	5 6 8 10 12 16	16						
20		-0.007	20~450	6 8 10 12 16	17						
25		-0.020		8 10 12 16 20	22						
30				8 10 12 16 20 24	27						



请按图示订货

■ GBS71-D6-L150-X15-Z15-A10-B10-P3-Q3-SC15

型号		最小单位1			P-Q 选择	SC
代码	Dg6	L	X-Z	A·B		
GBS71	6	-0.004 -0.012	20~300	X=2~P×5 Z=2~Q×5	根据使用 要求指定	3 最小单位 1mm



交期Delivery

4天 发货

○本产品发货不含周日

导向轴

01