


导向轴 ◀ 标准型·直杆型

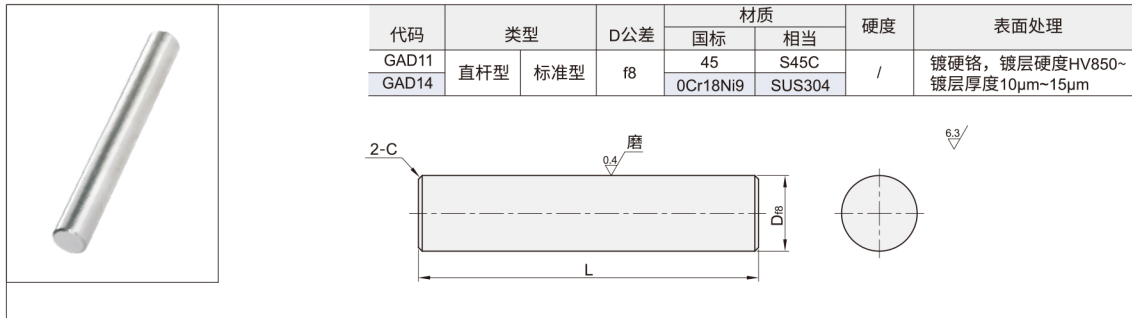

代码	类型		D公差	材质		硬度	表面处理
				国标	相当		
GAD11	直杆型	标准型	f8	45	S45C	/	镀硬铬, 镀层硬度HV850- 镀层厚度10μm~15μm
GAD14				0Cr18Ni9	SUS304		

型号		L		C
代码	D _{f8}	最小单位1		
(D公差f8) GAD11 GAD14	6	-0.010 -0.028	15~600	0.5
	8	-0.013	15~800	
	10	-0.035	15~800	
	12		15~1000	
	13		20~1000	
	15	-0.016 -0.043	20~1000	
	16		30~1200	
	18*		25~1200	
	20		25~1200	
	25	-0.020 -0.053	25~1200	1.0
	30		30~1500	
	35*		40~1500	
	40*	-0.025 -0.064	40~1500	
	50*		60~1500	

注: 带*规格不适用GAD14

可选加工

代码	技术说明																																														
LC	变更L尺寸公差 	选型方法: LC ①最小单位0.1 ②L<300变更为L±0.03; 300≤L<600变更为L±0.05; L≥600变更为L±0.1																																													
EC()	增加1个平面 	选型方法: EC10-K8 最小单位1 <table border="1"> <tr><th>D</th><th>h</th></tr> <tr><td>6-18</td><td>1</td></tr> <tr><td>20-40</td><td>2</td></tr> <tr><td>50</td><td>3</td></tr> </table>	D	h	6-18	1	20-40	2	50	3																																					
D	h																																														
6-18	1																																														
20-40	2																																														
50	3																																														
ED()	增加2个平面 	选型方法: ED10-K8-T20 最小单位1 <table border="1"> <tr><th>D</th><th>h</th></tr> <tr><td>3-5</td><td>0.5</td></tr> <tr><td>6-18</td><td>1</td></tr> <tr><td>20-40</td><td>2</td></tr> <tr><td>50</td><td>3</td></tr> </table>	D	h	3-5	0.5	6-18	1	20-40	2	50	3																																			
D	h																																														
3-5	0.5																																														
6-18	1																																														
20-40	2																																														
50	3																																														
SC()	增加扳手槽 	选型方法: SC5 最小单位1 <table border="1"> <tr><th>D</th><th>K1</th><th>K2</th></tr> <tr><td>6</td><td>5</td><td></td></tr> <tr><td>8</td><td>7</td><td>6</td></tr> <tr><td>10</td><td>8</td><td></td></tr> <tr><td>12</td><td>10</td><td></td></tr> <tr><td>13</td><td>11</td><td></td></tr> <tr><td>15</td><td>13</td><td></td></tr> <tr><td>16</td><td>14</td><td>11</td></tr> <tr><td>18</td><td>16</td><td></td></tr> <tr><td>20</td><td>17</td><td></td></tr> <tr><td>25</td><td>22</td><td></td></tr> <tr><td>30</td><td>27</td><td></td></tr> <tr><td>35</td><td>30</td><td>16</td></tr> <tr><td>40</td><td>36</td><td></td></tr> <tr><td>50</td><td>41</td><td>21</td></tr> </table>	D	K1	K2	6	5		8	7	6	10	8		12	10		13	11		15	13		16	14	11	18	16		20	17		25	22		30	27		35	30	16	40	36		50	41	21
D	K1	K2																																													
6	5																																														
8	7	6																																													
10	8																																														
12	10																																														
13	11																																														
15	13																																														
16	14	11																																													
18	16																																														
20	17																																														
25	22																																														
30	27																																														
35	30	16																																													
40	36																																														
50	41	21																																													

注: 选择2个或以上可选加工时, 各加工部位间隔需2mm以上。

代码	技术说明													
JD()	增加1个键槽 	选型方法: JD10-J10 ①最小单位1 ②JD=0时, 见右图 ③D12, D16, D20, D25, D30 适用于此可选加工												
VD()	增加V形槽 	选型方法: VD8 最小单位1 <table border="1"> <tr><th>D</th><th>W</th></tr> <tr><td>6-8</td><td>2</td></tr> <tr><td>10-18</td><td>4</td></tr> <tr><td>20-25</td><td>6</td></tr> <tr><td>30-35</td><td>8</td></tr> <tr><td>40-50</td><td>12</td></tr> </table>	D	W	6-8	2	10-18	4	20-25	6	30-35	8	40-50	12
D	W													
6-8	2													
10-18	4													
20-25	6													
30-35	8													
40-50	12													
VE()	增加两端V形槽 	选型方法: VE180-G8 最小单位1 <table border="1"> <tr><th>D</th><th>W</th></tr> <tr><td>6-8</td><td>2</td></tr> <tr><td>10-18</td><td>4</td></tr> <tr><td>20-25</td><td>6</td></tr> <tr><td>30-35</td><td>8</td></tr> <tr><td>40-50</td><td>12</td></tr> </table>	D	W	6-8	2	10-18	4	20-25	6	30-35	8	40-50	12
D	W													
6-8	2													
10-18	4													
20-25	6													
30-35	8													
40-50	12													

■ GAD11-D6-L80

型号			
代码	D	L	C
GAD11	6	15~600	0.5

请按图示订货

交期Delivery

5天 发货

○本产品发货时间不含周日