


线性导向轴 ◀ 一端外螺纹带扳手槽型 · 标准型/精密型



| 代码 | | D 公差 | 材质 | 硬度 | 表面处理 |
|-------|-------|---------|------------------------------|--|-------------------------------|
| 标准型 | 精密型 | | | | |
| GBA51 | GBA71 | g6 | GB:GCr15 JIS:相当于SUJ2 | 高频淬火 含有效硬化层 淬火硬度 GCr15 .HRC56~ S45C HRC56~ 9Cr18Mo HRC54~ | / |
| GBA52 | GBA72 | | | | 镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm |
| GBA56 | GBA76 | | GB:9Cr18Mo JIS:相当于SUS440C | | / |
| GBA57 | GBA77 | | | | 镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm |

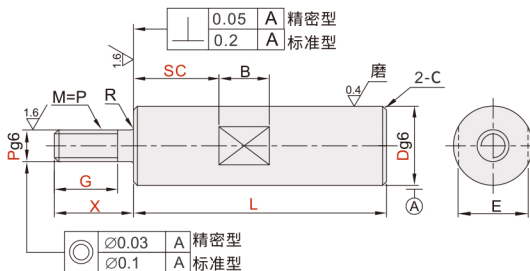

导向轴
01

| 型号 | | 最小单位1 | | | P 选择 | | | | 扳手槽尺寸 | | | C | | |
|---|---|------------------|---------|--------------|------------------|---------|--------------|----|-------------|----|---|----|-----|----|
| 代码 | Dg6 | L | X | G | | | | | SC | E | B | | | |
| 标准型 GBA51 GBA52 GBA56 GBA57 | 6 | -0.004 -0.012 | X=2~P×5 | 根据使用 要求指定 | 3 | 4 | 5 | | 最小单位 1mm | | | 5 | 0.5 | |
| | 8 | -0.005 | | | 3 | 4 | 5 | 6 | | | | 7 | | |
| | 10 | -0.014 | | | 4 | 5 | 6 | 8 | | | | 8 | | |
| | 12 | | | | 5 | 6 | 8 | 10 | | | | 10 | | |
| | 13 | | | | 5 | 6 | 8 | 10 | | | | 11 | | |
| | 15 | -0.006 | | | 5 | 6 | 8 | 10 | | | | 12 | | |
| | 16 | -0.017 | | | 5 | 6 | 8 | 10 | | | | 12 | | |
| | 18 | | | | 5 | 6 | 8 | 10 | | | | 12 | | |
| | 20 | | | | 6 | 8 | 10 | 12 | | | | 16 | | |
| | 25 | -0.007 -0.020 | | | 8 | 10 | 12 | 16 | | | | 20 | | 24 |
| | 30 | | | | 8 | 10 | 12 | 16 | | | | 20 | | 24 |
| | 35 | | | | 10 | 12 | 16 | 20 | | | | 24 | | 30 |
| | 40 | -0.009 -0.025 | | | 12 | 16 | 20 | 24 | | | | 30 | | 36 |
| | 50 | | | | 16 | 20 | 24 | 30 | | | | 41 | | 21 |
| | 精密型 GBA71 GBA72 GBA76 GBA77 | 6 | | | -0.004 -0.012 | X=2~P×5 | 根据使用 要求指定 | 3 | | | | 4 | | |
| 8 | | -0.005 | 3 | 4 | 5 | | | 6 | 7 | | | | | |
| 10 | | -0.014 | 4 | 5 | 6 | | | 8 | 8 | | | | | |
| 12 | | | 5 | 6 | 8 | | | 10 | 10 | | | | | |
| 13 | | | 5 | 6 | 8 | | | 10 | 11 | | | | | |
| 15 | | -0.006 | 5 | 6 | 8 | | | 10 | 12 | | | | | |
| 16 | | -0.017 | 5 | 6 | 8 | | | 10 | 12 | | | | | |
| 18 | | | 5 | 6 | 8 | | | 10 | 12 | | | | | |
| 20 | | | 5 | 6 | 8 | | | 10 | 12 | 16 | | | | |
| 25 | | -0.007 -0.020 | 6 | 8 | 10 | | | 12 | 16 | | | | | |
| 30 | | | 8 | 10 | 12 | | | 16 | 20 | | | | | |
| | | | 8 | 10 | 12 | | | 16 | 20 | 24 | | | | |
| | | | 8 | 10 | 12 | | | 16 | 20 | 24 | | | | |
| | | | 8 | 10 | 12 | | | 16 | 20 | 24 | | | | |



请按图示订货

■ GBA71-D6-L150-X12-G8-P3-SC30

| 型号 | | 最小单位1 | | | P 选择 | | SC |
|-------|-----|------------------|--------|---------|--------------|-----|-------------|
| 代码 | Dg6 | L | X | G | | | |
| GBA71 | 6 | -0.004 -0.012 | 20~300 | X=2~P×5 | 根据使用 要求指定 | 3 4 | 最小单位 1mm |



交期Delivery

4天 发货

○本产品发货不含周日