


定位销 ◀ 公差选择型 标准型/内螺纹型/外螺纹型




代码	类型	材质		硬度	表面处理
		国标	相当		
MEG01	标准型	9CrWMn	SKS3	淬火硬度58~61HRC	/
MEG02				淬火硬度58~61HRC, 镀层硬度850HV-	镀铬+抛光, 镀层厚度3~5μm
MEG03		0Cr18Ni9	SUS304	/	抛光
MEG04		9Cr18Mo	SUS440C	淬火硬度48~53HRC	

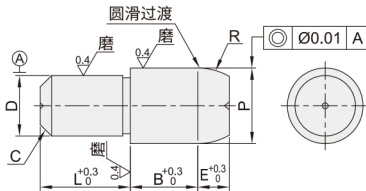


■ D=P时, 产品不带退刀槽, 并存在两种形式:


D=P但公差不同时:



D=P但公差相同时:



■ 抛光: ▨▨▨ 表示抛光加工部位。



■ 公差选择

D或P	普通型					精密型	
	g6	h7	m6	p6	s	a	b
2.00~3.00	-0.002 -0.008	0 -0.010	+0.008 +0.002	+0.012 +0.006			
3.01~6.00	-0.004 -0.012	0 -0.012	+0.012 +0.004	+0.020 +0.012			
6.01~10.00	-0.005 -0.014	0 -0.015	+0.015 +0.006	+0.024 +0.015	0 -0.01	+0.005 0	0 -0.005
10.01~18.00	-0.006 -0.017	0 -0.018	+0.018 +0.007	+0.029 +0.018			
18.01~30.00	-0.007 -0.020	0 -0.021	+0.021 +0.008	+0.035 +0.022			

■ 精密型不适用镀铬及抛光产品。

■ SUS440C材质的D部加工有识别槽。

■ 标准型

代码	型号	D公差	P公差	最小单位 0.01			最小单位1		最小单位0.5		R	C		
				D	P	L	B	E						
MEG01 MEG02 MEG03 MEG04	m6 p6 g6 h7 a b		s m6 p6 g6 h7 a b	2	2.00~5.00	3~12	2.0~10.0	1.0~20			5	0.5		
				3	3.00~7.00									
				4	4.00~8.00									
				5	5.00~9.00	4~15								
				6	6.00~11.00									
				8	8.00~14.00									
				10	10.00~16.00	7~17	3.0~12.0	1.0~20						
				12	12.00~17.00									
				13	13.00~20.00									
				16	16.00~26.00	10~20	3.0~14.0	1.0~20						
				13	13.00~20.00									
				16	16.00~26.00									
20	20.00~32.00	12~22	3.0~16.0	1.0~20										
12	12.00~17.00													
13	13.00~20.00													
16	16.00~26.00	12~27	3.0~18.0	1.0~20										
13	13.00~20.00													
16	16.00~26.00													
20	20.00~32.00	18~35	3.0~20.0	1.0~20										
13	13.00~20.00													
16	16.00~26.00													



请按图示订货

■ MEG01-p6-s-D2-P4-L4-B8-E2-R10

型号	最小单位0.01	最小单位1	最小单位0.5	R				
代码	D公差	P公差	D	P	L	B	E	R
MEG01	p6	s	2	4	4	8	2	10



交期Delivery

5天

发货

○本产品发货时间不含周日

E、R尺寸见下表