


# 定位销 ◀ 公差选择型 外螺纹型



外螺纹型		材质		硬度	表面处理
圆型	多棱型	国标	相当		
MEZ31	MEZ36	9CrWMn	SKS3	淬火硬度58~61HRC	/
MEZ32	MEZ37			淬火硬度58~61HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5um
MEZ33	MEZ38			/	/
MEZ34	MEZ39	0Cr18Ni9	SUS304	镀层硬度850HV~	镀硬铬, 镀层厚度5~8um
MEZ35	MEZ40				

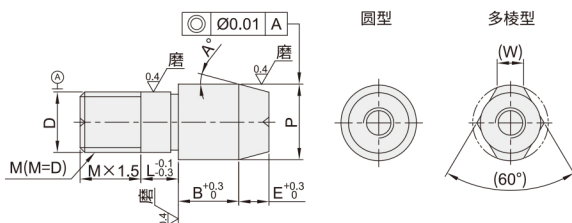


### ■ 公差选择


D或P	g6	h7	m6	p6	s
2.00~3.00	-0.002 -0.008	0 -0.010	+0.008 +0.002	+0.012 +0.006	
3.01~6.00	-0.004 -0.012	0 -0.012	+0.012 +0.004	+0.020 +0.012	
6.01~10.00	-0.005 -0.014	0 -0.015	+0.015 +0.006	+0.024 +0.015	0 -0.01
10.01~18.00	-0.006 -0.017	0 -0.018	+0.018 +0.007	+0.029 +0.018	
18.01~30.00	-0.007 -0.020	0 -0.021	+0.021 +0.008	+0.035 +0.022	

■ D=P时, 圆型不带退刀槽, 存在两种形式:

● D=P但公差不同时:



● D=P但公差相同时:



■ D=P时, 多棱型带退刀槽.



代码	MA	RC	DB	DC																	
技术说明	增加内螺纹 	变更颈部退刀槽为R0.5 	增加引导部 	增加排气槽 																	
	适用于标准型和外螺纹型 <table border="1"> <tr><td>D</td><td>MA</td><td>V1</td></tr> <tr><td>6</td><td>M3</td><td>4</td></tr> <tr><td>8~13</td><td>M4</td><td>6</td></tr> <tr><td>16~20</td><td>M6</td><td>9</td></tr> </table>	D	MA	V1	6	M3	4	8~13	M4	6	16~20	M6	9	P-D ≤ 2不适用	不适用外螺纹型 <table border="1"> <tr><td>D</td><td>V1</td></tr> <tr><td>3~12</td><td>1</td></tr> <tr><td>13~20</td><td>2</td></tr> </table>	D	V1	3~12	1	13~20	2
D	MA	V1																			
6	M3	4																			
8~13	M4	6																			
16~20	M6	9																			
D	V1																				
3~12	1																				
13~20	2																				

型号		最小单位0.01		最小单位1	最小单位0.1		A	(W)	M	
代码	D公差	P公差	D	P	L	B				E
圆型	多棱型	m6	s	3	3.50~8.00	0~8	2.0~15.0	0.5~15.0	1.5	M3
				4	4.50~8.00	0~10			1.8	M4
				5	5.50~10.00	0~12			2.2	M5
				6	6.50~10.00		3		M6	
				8	8.50~15.00	0~17	3.5		M8	
				10	10.50~18.00		4		M10	
				12	12.50~20.00	0~22	5		M12	
				16	16.50~27.00		7		M16	
				20	20.50~30.00		9		M20	

### ■ MEZ31-m6-s-D3-P7-L8-B3-E5-A15-MA

型号		最小单位0.01	最小单位1	最小单位0.5	A	可选加工代码		
代码	D公差	P公差	D	P			L	E
MEZ31	m6	s	3	3.50-8.00	0-8	2.0-15.0/0.5-15.0	15	MA



请按图示订货



交期Delivery

5天

发货

○本产品发货时间不含周日