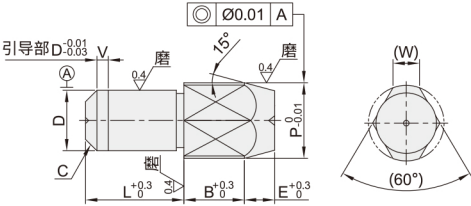


定位销 ◀ 多棱型 P.L.B尺寸指定型




P.L.B尺寸指定型			材质		硬度	表面处理
Dm6	Dp6	Dg6	国标	相当		
MEW54	MEW60	MEW66	9CrWMn	SKS3	淬火硬度 58~61 HRC	/
MEW55	MEW61	MEW67			淬火硬度 58~61 HRC, 镀层硬度 850HV~	镀硬铬, 镀层厚度 3~5μm
MEW56	MEW62	MEW68			/	/
MEW57	MEW63	MEW69	0Cr18Ni9	SUS304	镀层硬度 850HV~	镀硬铬, 镀层厚度 5~8μm
MEW58	MEW64	MEW70	9Cr18Mo	SUS440C	淬火硬度 48~53 HRC	/
MEW59	MEW65	MEW71				





■ SUS440C材质的D部加工有识别槽。

■ P尺寸公差表

P	g6
3	-0.002 -0.008
4~6	-0.004 -0.012
8~10	-0.005 -0.014
12~16	-0.006 -0.017
20~30	-0.007 -0.020

代码	技术说明																													
EC()	变更E尺寸	■ 最小单位1 ■ 圆锥小头直径1min; ■ B尺寸因EC的变化而变化 <table><tr><th>D</th><th>EC</th><th>D</th><th>EC</th></tr><tr><td>2</td><td>2~5</td><td>8</td><td>5~16</td></tr><tr><td>3</td><td>3~9</td><td>10</td><td></td></tr><tr><td>4</td><td>4~11</td><td>12</td><td>5~22</td></tr><tr><td>5</td><td></td><td>13</td><td></td></tr><tr><td>6</td><td>4~13</td><td>16</td><td>6~23</td></tr><tr><td></td><td></td><td>20</td><td></td></tr></table>	D	EC	D	EC	2	2~5	8	5~16	3	3~9	10		4	4~11	12	5~22	5		13		6	4~13	16	6~23			20	
	D	EC	D	EC																										
	2	2~5	8	5~16																										
3	3~9	10																												
4	4~11	12	5~22																											
5		13																												
6	4~13	16	6~23																											
		20																												
																														

代码	技术说明													
MA	增加内螺纹	 <table><tr><th>D</th><th>MA</th><th>V1</th></tr><tr><td>6</td><td>M3</td><td>4</td></tr><tr><td>8~13</td><td>M4</td><td>6</td></tr><tr><td>16~20</td><td>M6</td><td>9</td></tr></table>	D	MA	V1	6	M3	4	8~13	M4	6	16~20	M6	9
D	MA	V1												
6	M3	4												
8~13	M4	6												
16~20	M6	9												
RC	变更颈部退刀槽为R0.5	 P-D≤2不适用												

型号			D公差			最小单位0.01	最小单位1	最小单位0.1	C	E	V	(W)
代码	D		m6	p6	g6	P	L	B				
P.L.B尺寸指定型	1		+0.008	+0.012	-0.002	1.20~3.00	2~3	1.0~5.0	0.1	0.5	0	0.6
	2		+0.002	+0.006	-0.008	2.50~8.00	2~8		0.5	1		1.2
	3					3.50~10.00	3~10			2		1.5
	4		+0.012	+0.020	-0.004	4.50~10.00	3~15					1.8
	5		+0.004	+0.012	-0.012	5.50~12.00	5~15		1	3		2.2
	6					6.50~12.00	5~15					3
	8		+0.015	+0.024	-0.005	8.50~16.00	5~20		1.5			3.5
	10		+0.006	+0.015	-0.014	11.00~18.00	5~25					4
	12		+0.018	+0.029	-0.006	13.00~20.00	6~30		2	4		5
	13		+0.007	+0.018	-0.017	14.00~20.00	7~30					5.5
	16					17.00~30.00	8~35					7
	20		+0.021 +0.008	+0.035 +0.022	-0.007 -0.020	22.00~30.00	10~45		3	5	2	9



请按图示订货

■ MEW54-D2-P4-L6-B6

型号	D公差	最小单位0.01	最小单位1	最小单位0.1			
代码	D	m6	p6	g6	P	L	B
MEW54	2	+0.008 +0.002	+0.012 +0.006	-0.002 -0.008	2.50~8.00	2~8	1.0~15.0



交期Delivery

5天	发货
----	----

○ 本产品发货时间不含周日