

无弹簧定位珠 ◀ 内六角螺栓型/紧定螺钉型




■内六角螺栓型

代码	类型	载荷	主体			球头	
			材质	硬度	表面处理	材质	硬度
YZL61	内六角螺栓型	轻载	SCM435	35-45HRC	发黑	SUJ2	53-60HRC
YZL62	内六角螺栓型	重载	SUS304	/	/	SUS440C	55HRC-


■紧定螺钉型

代码	类型	主体			球头	
		材质	硬度	表面处理	材质	硬度
YZL71	紧定螺钉型	SCM435	35-45HRC	发黑	SUJ2	53-60HRC
YZL72	紧定螺钉型	SUS304	/	/	SUS440C	55HRC-

内六角螺栓型
YZL61/62

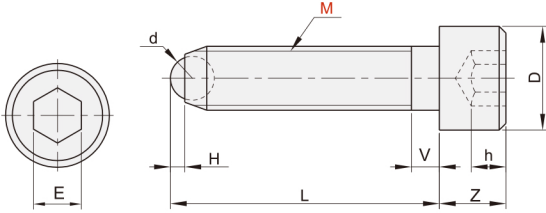

紧定螺钉型
YZL71/72

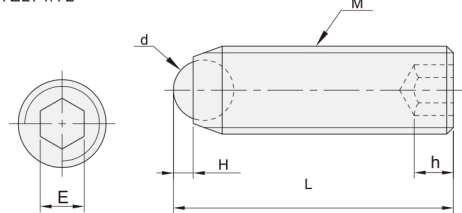

■内六角螺栓型

代码	型号		公称尺寸	L	V	D	Z	E	h	d	H	耐负载 (kN)
	M	M										
YZL61 YZL62	4		10	10.5	2.1	7	4	3	2	2.5	0.8	1.3
			12	12.5								
			16	16.5								
			20	20.5								
	5		25	25.5	2.4	8.5	5	4	2.5	3	1	1.4
			12	12.6								
			16	16.6								
			20	20.6								
	6		25	25.6	3	10	6	5	3	4	1.3	3.3
			30	30.8								
			40	40.8								
			20	21.2								
8		30	31.2	3.5	13	8	6	4	5.5	1.8	3.4	
		35	36.2									
		40	41.2									
		50	51.2									
10		25	26.7	4.5	16	10	8	5	7	2.3	3.9	
		30	31.7									
		40	41.7									
		50	51.7									
12		60	61.7	5	18	12	10	6	8.5	2.8	4.8	
		30	32									
		50	52									
		80	82									

■紧定螺钉型

代码	型号		L	d	E	h	H	耐负载 (kN)			
	M	M									
YZL71 YZL72	3	5.2	10.2	1.5	1.5	1.2	0.5	0.5			
	4	6.5	10.5	16.5	2.5	2	2	0.8	1.3		
	5	8.6	12.6	20.6	3	2.5	2	1	1.4		
	6	10.8	16.8	20.8	25.8	4	3	3.5	1.3	3.3	
	8	*11.2	13.2	21.2	26.2	31.2	5.6	4	5(2.5)	1.8	3.4
	10	*13.7	17.7	21.7	26.7	36.7	7.1	5	6(3.5)	2.3	3.9
12	*18	22	32	42		8.7	6	8(3)	2.8	4.8	

注: L尺寸带 * 符号的, h值为 () 内的尺寸。



请按图示订货

■YZL71-M4-L10.5

型号		
代码	M	L
YZL71	4	10.5



交期Delivery

3 天 发货

○本产品发货时间不含周日