




代码	材质	接线方式	导线截面	适用范围
DZB01	全铜材质	压接	1.25mm ²	铜电缆连接

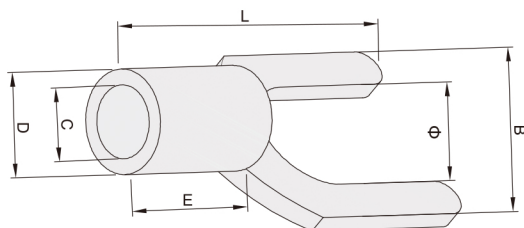

产品参数

OT 裸端子型号	尺寸人工测量有细微误差 请根据实际为准(单位: mm)							每包/个
	脚内圆 (C)	脚外圆 (D)	脚长 (E)	总长 (L)	外圆 (B)	孔径 (Φ)	厚度 (T)	
UT0.5-3	1.3	2.1	4.5	12	5.5	3	0.3	2000个/包
UT0.5-4	1.3	2.1	4.5	13.6	6.8	4	0.3	2000个/包
UT1-3	2	3	5	14.55	5.6	3	0.5	1000个/包
UT1-4	2	3	5	15.4	6.9	4	0.5	1000个/包
UT1.5-3	2.2	3.2	5	14.5	5.6	3	0.5	1000个/包
UT1.5-4	2.2	3.2	5	15.5	7.15	4	0.5	1000个/包
UT1.5-5	2.2	3.2	5	17	8.65	5	0.5	1000个/包
UT1.5-6	2.2	3.2	5	19.8	10.2	6.2	0.5	1000个/包
UT2.5-3	2.9	3.9	5	15	5.9	3	0.5	1000个/包
UT2.5-4	2.9	3.9	5	15	7.3	4	0.5	1000个/包
UT2.5-5	2.9	3.9	5.3	18	8.8	5	0.5	1000个/包
UT2.5-6	2.9	3.9	5.3	20	10.7	6.4	0.5	1000个/包
UT2.5-8	2.9	3.9	5	21.9	13.4	8.4	0.5	1000个/包
UT4-4	3.6	4.8	6.2	18.5	8	4	0.6	1000个/包
UT4-5	3.6	4.8	6.2	19.5	19.5	5	0.6	1000个/包
UT4-6	3.6	4.8	6.2	21.7	21.7	6	0.6	1000个/包
UT4-8	3.6	4.8	6.2	24	24	8.4	0.6	1000个/包
UT6-4	4.4	5.9	7	19.8	19.8	4	0.7	1000个/包
UT6-5	4.4	5.9	7	21.5	21.5	5.2	0.7	1000个/包
UT6-6	4.4	5.9	7.4	22.5	22.5	6.2	0.7	1000个/包
UT6-8	4.4	5.9	7.3	25.3	25.3	8.45	0.7	1000个/包
UT10-4	5.5	7.4	8.8	24	24	4.2	0.9	1000个/包
UT10-5	5.5	7.4	8.8	24	24	5.25	0.9	1000个/包
UT10-6	5.5	7.4	8.8	24.8	24.8	6.3	0.9	1000个/包
UT10-8	5.5	7.4	8.6	27.6	27.6	8.4	0.9	1000个/包
UT16-6	6.7	9.3	10.7	27.6	27.6	6.1	1.2	500个/包
UT16-8	6.7	9.3	10.4	31	31	8.1	1.2	500个/包