


ST 系列回拉式弹簧接线端子


代码	类型	颜色	安装方式	端子类型
OTC51	回拉弹簧式	单层	黄绿色	DIN导轨
				接地型




ST-1.5
厚度:4.2mm




ST1.5-2
厚度:4.2mm




ST-2.5
厚度:5.2mm




ST2.5-2
厚度:5.2mm

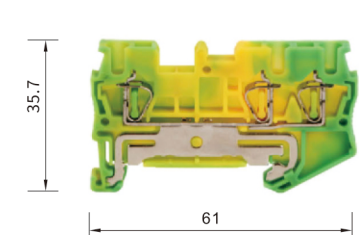


ST2.5-4
厚度:5.2mm

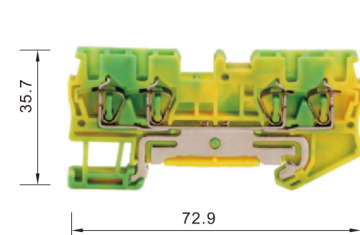


ST-4
厚度:5.2mm




ST4-2
厚度:6.2mm



ST4-4
厚度:6.2mm

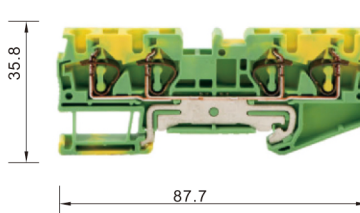


ST6
厚度:8.2mm



ST6-3




ST-10
厚度:5.2mm

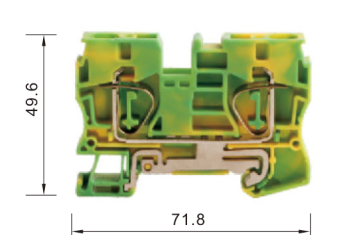


ST 系列回拉式弹簧接线端子


ST16



ST35



ST2.5-4
厚度:5.2mm

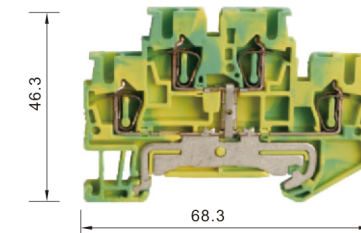

型号	ST1.5		ST1.5-2		ST2.5		WST2.5-2		ST2.5-4		ST4	
技术参数	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL
额定截面积	0.14-1.5	AWG26-16	0.14-1.5	AWG26-14	0.2-2.5	AWG26-12	0.2-2.5	AWG26-12	0.2-2.5	AWG26-12	0.2-4	AWG20-10
额定冲击电压	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
污染等级/过压等级	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
材料级别	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
绝缘材料/阻燃等级	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0
根据UL94标准认证	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0
附件	挡板		D-ST-1.5		D-ST-1.5/3PE		D-ST-2.5/PE		D-ST-2.5/3PE		D-ST-2.5/4PE	
	快速标记条		ZB4		ZB4		ZB5		ZB5		ZB6	
	固定件		E/UK		E/UK		E/UK		E/UK		E/UK	
	螺丝刀标准尺寸		0.4×2.5		0.4×2.5		0.6×3.5		0.6×3.5		0.6×3.5	

型号	ST4-2		ST4-4		WST6		ST-6-3		ST10		ST-16	
技术参数	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL
额定截面积	0.2-4	AWG20-10	0.2-6	AWG20-10	0.5-6	AWG20-8	0.5-6	/	10	AWG16-6	1.5-16	AWG16-4
额定冲击电压	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
污染等级/过压等级	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
材料级别	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
绝缘材料/阻燃等级	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0
根据UL94标准认证	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0
附件	挡板		D-ST-4/3PE		D-ST-4/4PE		D-ST-6/PE		D-ST-6/3PE		D-ST-10PE	
	快速标记条		ZB6		ZB6		ZB8		ZB8		ZB10	
	固定件		E/UK		E/UK		E/UK		E/UK		E/UK	
	螺丝刀标准尺寸		0.6×3.5		0.6×3.5		0.8×4.0		0.8×4.0		1.0×5.5	

型号	ST-35		STTB2.5	
技术参数	IEC	UL	IEC	UL
额定截面积	2.5-35	/	0.08-2.5	AWG28-12
额定冲击电压	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
污染等级/过压等级	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
材料级别	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
绝缘材料/阻燃等级	PA66/V0	PA66/V0	PA66/V0	PA66/V0
根据UL94标准认证	PA66/V0	PA66/V0	PA66/V0	PA66/V0

附件	挡板	D-ST-35PE	D-ST-2.5/2/2PE
快速标记条	ZB10	FBS10/2/3/5-5	
固定件	E/UK	E/UK	
螺丝刀标准尺寸	1.0×5.5	0.6×3.5	



请按图示订货

OTC51-ST-35

代码	型号	额定截面积
OTC41	ST-35	6



交期Delivery

5天 发货

本产品发货时间不含周日