



平皮带用惰轮 ◀ 直柱型 L=100-500



代码	类型	材质		表面处理
		国标	相当	
VBL01	直柱型	LF2	A5052	本色阳极氧化
VBL11		Q275	Q275	无电解镀锌
VBL21		0Cr18Ni9	SUS304	
VBL26		蓝色POM	蓝色POM	/

■ 轴承精度: GB/T 307.1 0级
相当于: JIS B 1514 0级

6.3/▽

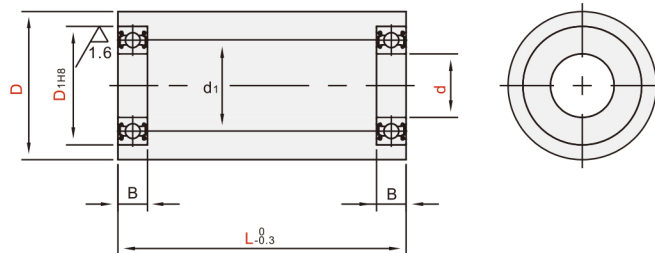

型号		d	最小单位10 L	d1			轴承尺寸				
代码	D			A5052/蓝色POM	钢(Q275)	不锈钢(SUS304)	型号	D1	B		
VBL01 VBL11 VBL21 VBL26	30	8	100-500	15	—	—	698ZZ	19	6		
		8A		—	—	608ZZ	22	7			
		10		15.8	18	6900ZZ	24	6			
		12				6901ZZ					
	35	10		17	18.1	6900ZZ	22	6			
		12				6901ZZ	24				
		15				6902ZZ	28		7		
	40	8		17	18.7	20	628ZZ	24	8		
		10					6000ZZ	26			
		12					22.7	20	6901ZZ	24	6
		15							6902ZZ	28	
		20					6804ZZ	32	7		
		50	10				22	24		22	6200ZZ
	12		6001ZZ	28							
	15		6902ZZ	28	7						
	20		6804ZZ	32							
	25		6905ZZ	42	9						
	60	12	22	—	—	6201ZZ	32	10			
		15				6002ZZ	32				
		20				6904ZZ	37	9			
		25				6905ZZ	42				
		30				6906ZZ	47				
		25				6205ZZ	52		15		
	80	30	41	—	—	6006ZZ	55	13			
35		6907ZZ				55	10				



请按图示订货

■ VBL01-D30-d8-L100

型号		d	最小单位10 L
代码	D		
VBL01	30	8	100-500



交期Delivery

6天 发货

○ 本产品发货时间不含周日