


平皮带用惰轮 ◀ 带肋槽直柱型 L=100-500



代码	类型	材质		表面处理
		国标	相当	
VBL31	带肋槽直柱型	LF2	A5052	本色阳极氧化
VBL41		Q275	Q275	无电解镀锌
VBL51		0Cr18Ni9	SUS304	/

■轴承精度: GB/T 307.1 0级
相当于: JIS B 1514 0级

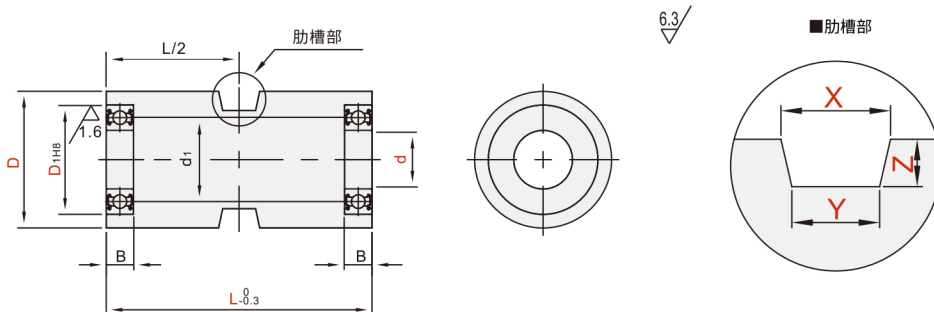

型号		d	最小单位10			最小单位0.1			d1			轴承尺寸			
代码	D		L	X	Y	Z	铝合金(A5052)	钢(Q275)	不锈钢(SUS304)	型号	D1	B			
VBL31	40	8	100-500	10.0-16.0	5.0-15.0	6.0-8.0	17	20	20	628ZZ	24	8			
		10								6900ZZ	26				
		12								6901ZZ	24	7			
		15								6902ZZ	28				
		20								6804ZZ	32				
VBL41	50	10					17	22	24	22	22	22	6200ZZ	30	9
		12											6001ZZ	28	
		15											6902ZZ	28	7
		20											6804ZZ	32	
		25											6905ZZ	42	
VBL31	60	12					22	32	-	-	-	-	6201ZZ	32	10
		15											6002ZZ	32	
		20											6904ZZ	37	9
		25											6905ZZ	42	
	30	6906ZZ											47		
	80	25	6205ZZ	52	15										
		30	6006ZZ	55		13									
35		6907ZZ	55	10											



请按图示订货

■ VBL31-D40-d8-L200-X10-Y5-Z6

型号		d	最小单位10			
代码	D		L	X	Y	Z
VBL31	40	8	100-500	10-16.0	5.0-15.0	6.0-8.0



交期Delivery

6天 发货

○本产品发货时间不含周日