




感应电机/可逆电机 ◀ 40W □90mm




代码	规格1				规格2	
	5IK40GN				S	C
	5RK40GN					
ZDA04	电动机尺寸mm	类型名称	功率W	轴类	电压	
	5:表示90	IK:感应电动机 RK:可逆电动机	40	GN型齿轴	三相220V	单相220V

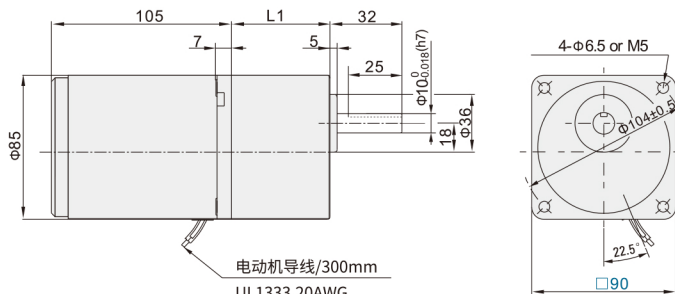

■ 接线示意图 40W,1ph100V/110V/120V/220V/230V



■ 40W,3ph220V/380V



若对换R/S/T中任意二条,电动机作逆时针方向运转。

■ 感应电机特性表-连续额定

导线型		输出功率 W	电压 V	频率 Hz	电流 A	启动转矩 mN.m	额定转矩 mN.m	额定转速 r/min	电容容量 / 耐压 μF
齿轮轴型	圆轴型								
5IK40GN-A	5IK40A-A	40	1ph100	50	0.65	220	315	1250	12.0
				60	0.70		260	1550	
5IK40GN-E	5IK40A-E		1ph 110	0.55	200	260	1550	8.0	
			1ph 120	0.60					
			1ph 220	0.35					
5IK40GN-C	5IK40A-C		1ph 230	0.40	220	315	1250	2.5	
			1ph 220	0.35					
5IK40GN-H	5IK40A-H		1ph 230	0.40	200	260	1550	2.5	
			50	0.30					800
5IK40GN-S	5IK40A-S		60	0.25	660	250	1550	\	
		50	0.17	800					315
5IK40GN-S3	5IK40A-S3	3ph 380	60	0.14	660	250	1550	\	

■ 可逆电机特性表-30分钟额定

导线型		输出功率 W	电压 V	频率 Hz	电流 A	启动转矩 mN.m	额定转矩 mN.m	额定转速 r/min	电容容量 / 耐压 μF
齿轮轴型	圆轴型								
5RK40GN-A	5RK40A-A	40	1ph100	50	0.78	300	315	1250	15.0
				60	1.05				
5RK40GN-E	5RK40A-E		1ph 110	0.79	260	260	1550	12.0	
			1ph 120	0.80					
			1ph 220	0.45					270
1ph 230									
5RK40GN-H	5RK40A-H		1ph 220	260	1550	260	1550	3.0	
			1ph 230						

■ 容许力矩单位 (上段: N.m / 下段: kgf.cm)

电动机/减速机	转速	减速比																					
		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
5I(R)K40GN-A 5I(R)K40GN-E	50Hz	0.77	0.92	1.3	1.5	1.9	2.3	2.38	3.2	3.8	4.6	4.88	5.7	6.9	8.3	8.57	10						
	60Hz	7.85	9.38	13.2	15.3	19.4	23.4	24.3	32.6	38.7	46.9	49.8	58.1	70.4	84.7	87.4	100						
5I(R)K40GN-C 5I(R)K40GN-H	50Hz	0.63	0.76	1.1	1.3	1.6	1.9	2.00	2.6	3.2	3.8	4.07	4.7	5.7	6.8	7.19	8.6	10					
	60Hz	6.42	7.75	11.2	13.2	16.3	19.3	20.4	26.5	32.6	38.7	41.5	47.9	58.1	69.3	73.4	87.7	100					
5IK40GN-S 5IK40GN-S3	50Hz	10																					
	60Hz	100																					



■ ZDA04-5IK40GN-C-5GN20K

代码	规格1	规格2	速比
ZDA04	5IK40GN	S	5GN20K (20:20比)
		C	
	5RK40GN	S	
		C	

■ ZDA04-5IK40A-C

代码	规格1	规格2
ZDA03	5IK40A	S
		C
	5RK40A	S
		C



交期Delivery

5天 发货

○本产品发货时间不含周日