



感应电机/可逆电机 ◀ 60W □90mm



| 代码 | 规格1 | | | | 规格2 | | |
|-------|---------|----------------------|-----|-------|--------|--------|-----|
| | 5IK60GN | | | | S | C | F |
| | 5RK60GN | | | | | | |
| ZDA05 | 电动机尺寸mm | 类型名称 | 功率W | 轴类 | 电压 | | 配件 |
| | 5:表示90 | IK:感应电动机 RK:可逆电动机 | 60 | GN型齿轴 | 三相220V | 单相220V | 带风扇 |


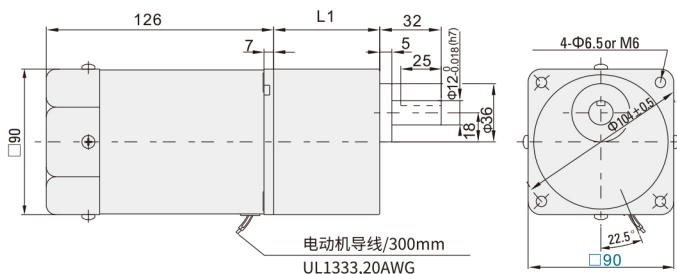


■ 接线示意图 60W, 1ph100V/110V/120V/220V/230V

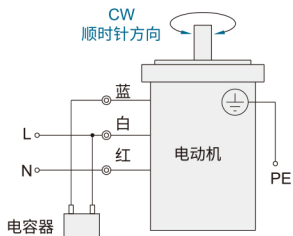

注: 60W以上默认带风扇

■ 60W, 3ph220V/380V

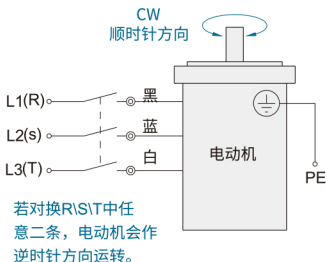

■ 感应电机特性表-连续额定

| 导线型 | | 输出功率 W | 电压 V | 频率 Hz | 电流 A | 启动转矩 mN.m | 额定转矩 mN.m | 额定转速 r/min | 电容量 / 耐压 μF |
|-------------|------------|--------|---------|-------|------|-----------|-----------|------------|-------------|
| 齿轮轴型 | 圆轴型 | | | | | | | | |
| 5IK60GN-AF | 5IK60A-AF | 60 | 1ph100 | 50 | 1.00 | 320 | 470 | 1250 | 20.0 |
| | | | | 60 | 1.10 | | | | |
| 5IK60GN-EF | 5IK60A-EF | | 1ph 110 | 50 | 0.80 | 300 | 380 | 1550 | 12.0 |
| | | | | 60 | 0.85 | | | | |
| 5IK60GN-CF | 5IK60A-CF | | 1ph 220 | 50 | 0.50 | 340 | 470 | 1250 | 4.0 |
| | | | | 60 | 0.55 | | | | |
| 5IK60GN-HF | 5IK60A-HF | | 1ph 220 | 50 | 0.50 | 340 | 380 | 1550 | 4.0 |
| | | | | 60 | 0.55 | | | | |
| 5IK60GN-SF | 5IK60A-SF | | 3ph 220 | 50 | 0.45 | 1000 | 470 | 1250 | \ |
| | | | | 60 | 0.40 | 800 | 380 | 1550 | |
| 5IK60GN-S3F | 5IK60A-S3F | | 3ph 380 | 50 | 0.26 | 1000 | 470 | 1250 | \ |
| | | | | 60 | 0.23 | 800 | 380 | 1550 | |

齿轮减速机
55

■ 可逆电机特性表-30分钟额定

| 导线型 | | 输出功率 W | 电压 V | 频率 Hz | 电流 A | 启动转矩 mN.m | 额定转矩 mN.m | 额定转速 r/min | 电容量 / 耐压 μF |
|------------|-----------|--------|---------|-------|------|-----------|-----------|------------|-------------|
| 齿轮轴型 | 圆轴型 | | | | | | | | |
| 5RK60GN-AF | 5RK60A-AF | 60 | 1ph100 | 50 | 1.26 | 470 | 470 | 1250 | 25.0 |
| | | | | 60 | 1.70 | | | | |
| 5RK60GN-EF | 5RK60A-EF | | 1ph 110 | 50 | 0.80 | 330 | 380 | 1550 | 15.0 |
| | | | | 60 | 1.05 | | | | |
| 5RK60GN-CF | 5RK60A-CF | | 1ph 220 | 50 | 0.55 | 420 | 470 | 1250 | 4.50 |
| | | | | 60 | 0.60 | | | | |
| 5RK60GN-HF | 5RK60A-HF | | 1ph 220 | 50 | 0.55 | 420 | 380 | 1550 | 4.50 |
| | | | | 60 | 0.60 | | | | |

■ 容许力矩单位 (上段: N.m / 下段: kgf.cm)

| 电动机/减速机 | 减速比 | 转速 | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|---------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|-----|-----|-----|--|--|--|
| | | 3 | 3.6 | 5 | 6 | 7.5 | 9 | 10 | 12.5 | 15 | 18 | 20 | 25 | 30 | 36 | 40 | 50 | 60 | 75 | 90 | 100 | 120 | 150 | | | |
| 5I(R)K60GN-AF | 5I(R)K60GN-EF | 4GN□K | 50Hz | 1.1 | 1.4 | 1.9 | 2.3 | 2.9 | 3.4 | 3.57 | 4.8 | 5.7 | 6.8 | 7.03 | 8.6 | | | | | | | | | | | |
| | | | | 60Hz | 11.2 | 14.2 | 19.3 | 23.4 | 29.6 | 34.7 | 36.4 | 48.9 | 58.1 | 69.3 | 71.7 | 87.7 | | | | | | | | | | |
| 5I(R)K60GN-CF | 5I(R)K60GN-HF | 4GN□K | 50Hz | 0.92 | 1.1 | 1.5 | 1.8 | 2.3 | 2.8 | 2.99 | 3.8 | 4.6 | 5.5 | 5.70 | 6.9 | 8.3 | | | | | | | | | | |
| | | | | 60Hz | 9.38 | 11.2 | 15.3 | 18.3 | 23.4 | 28.5 | 30.5 | 38.7 | 46.9 | 56.1 | 58.2 | 70.1 | 84.7 | | | | | | | | | |



请按图示订货

■ ZDA05-5IK60GN-SF-5GN20K

| 代码 | 规格1 | 规格2 | 速比 |
|-------|---------|-----|--------------------|
| ZDA05 | 5IK60GN | SF | 5GN20K (20:20比) |
| | | CF | |
| | 5RK60GN | SF | |
| | | CF | |

■ ZDA05-5IK60A-AF

| 代码 | 规格1 | 规格2 |
|-------|--------|-----|
| ZDA03 | 4IK25A | S |
| | | C |
| | 4RK25A | S |
| | | C |



交期Delivery

5天 发货

○本产品发货时间不含周日