


# WS系列 面板安装螺母型公插座




| 系列    | 类型         | 接插方式 | 材质       |                    |       |
|-------|------------|------|----------|--------------------|-------|
|       |            |      | 外壳       | 绝缘体                | 接触体   |
| DYB32 | 面板安装螺母型公插座 | 螺纹连接 | 锌基合金(镀铬) | 热塑性塑料PPS(耐高温260°C) | 铜(镀金) |

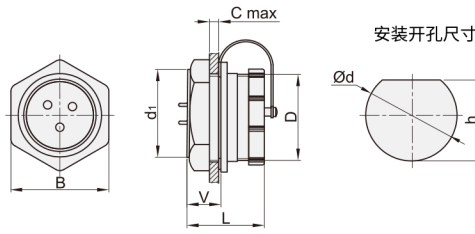


### ■ 孔位排列图(针的方向)


#### · WS16系列




#### · WS20系列



#### · WS24系列



#### · WS28系列

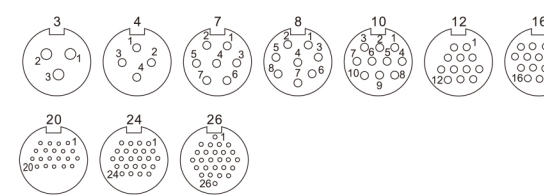

单位:mm

| 插座与面板配合直径 | 16    | 20    | 24    | 28    |
|-----------|-------|-------|-------|-------|
| d1        | M16×1 | M20×1 | M24×1 | M28×1 |
| D         | M18×1 | M22×1 | M26×1 | M30×1 |
| C         | 5     | 5     | 5     | 5     |
| V         | 9.7   | 9.9   | 10    | 10.2  |
| L         | 22    | 23    | 23    | 23    |
| B         | 21.2  | 25.5  | 29.2  | 33.3  |
| Ød        | 15.7  | 19.7  | 23.9  | 27.7  |
| h         | 15.3  | 19.3  | 23.2  | 26.9  |

|      |                    |
|------|--------------------|
| 接插方式 | 螺纹连接               |
| 接线方式 | 焊接: Ø1/2.5/3.5/5.5 |
| 接插次数 | 500                |
| 温度范围 | -40°C~85°C         |
| 绝缘电阻 | 2000MΩ             |



请按图示订货

### ■ DYB32-WS20-2

| 代码    | 规格   | 芯数 |
|-------|------|----|
| DYB32 | WS20 | 2  |



交期Delivery

**5天** 发货

○本产品发货时间不含周日

[www.vipdo.cn](http://www.vipdo.cn) 400-098-1117 工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!

# WS系列 面板安装螺母型公插座

| 系列码     | 型号      | 插座与面板配合直径 | 芯数      | 接插件种类   | 接线方式 | 适配插孔类型  |       |    |        |
|---------|---------|-----------|---------|---------|------|---------|-------|----|--------|
|         |         |           |         |         |      | 中继母插头   | 弯角母插头 |    |        |
| DYB32   | WS16J2  | 16        | 2       | 插针      | 焊接   | WS16K2  | TQ    | TS |        |
|         | WS16J3  |           | 3       |         |      | WS16K3  |       |    |        |
|         | WS16J4  |           | 4       |         |      | WS16K4  |       |    |        |
|         | WS16J5  |           | 5       |         |      | WS16K5  |       |    |        |
|         | WS16J7  |           | 7       |         |      | WS16K7  |       |    |        |
|         | WS16J9  |           | 9       |         |      | WS16K9  |       |    |        |
|         | WS16J10 |           | 10      |         |      | WS16K10 |       |    |        |
|         | WS20J2  |           | 20      |         |      | 2       |       |    | WS20K2 |
|         | WS20J3  |           |         |         |      | 3       |       |    | WS20K3 |
|         | WS20J4  |           |         |         |      | 4       |       |    | WS20K4 |
|         | WS20J5  | 5         |         | WS20K5  |      |         |       |    |        |
|         | WS20J7  | 7         |         | WS20K7  |      |         |       |    |        |
|         | WS20J9  | 9         |         | WS20K9  |      |         |       |    |        |
|         | WS20J12 | 12        |         | WS20K12 |      |         |       |    |        |
|         | WS24J2  | 24        | 2       | WS24K2  |      |         |       |    |        |
|         | WS24J3  |           | 3       | WS24K3  |      |         |       |    |        |
|         | WS24J4  |           | 4       | WS24K4  |      |         |       |    |        |
|         | WS24J9  |           | 9       | WS24K9  |      |         |       |    |        |
|         | WS24J10 |           | 10      | WS24K10 |      |         |       |    |        |
|         | WS24J12 |           | 12      | WS24K12 |      |         |       |    |        |
|         | WS24J19 |           | 19      | WS24K19 |      |         |       |    |        |
|         | WS28J3  | 28        | 3       | WS28K3  |      |         |       |    |        |
|         | WS28J4  |           | 4       | WS28K4  |      |         |       |    |        |
|         | WS28J7  |           | 7       | WS28K7  |      |         |       |    |        |
|         | WS28J8  |           | 8       | WS28K8  |      |         |       |    |        |
|         | WS28J10 |           | 10      | WS28K10 |      |         |       |    |        |
| WS28J12 | 12      |           | WS28K12 |         |      |         |       |    |        |
| WS28J16 | 16      |           | WS28K16 |         |      |         |       |    |        |
| WS28J20 | 20      |           | WS28K20 |         |      |         |       |    |        |
| WS28J24 | 24      |           | WS28K24 |         |      |         |       |    |        |
| WS28J26 | 26      |           | WS28K26 |         |      |         |       |    |        |

| 规格    | 芯数    | 额定电流(A) | 接触件直径       | 工作电压(V) | 耐压(V) | 接触电阻(mΩ) | 线规(mm <sup>2</sup> /AWG) |
|-------|-------|---------|-------------|---------|-------|----------|--------------------------|
| WS16  | 2     | 10      | Ø1.5×2      | 500     | 1500  | 2.5      | ≤2/14                    |
|       | 3     |         | Ø1.5×3      |         |       |          |                          |
|       | 4     |         | Ø1×4        |         |       |          |                          |
|       | 5     | 5       | Ø1×5        | 400     | 1200  | 5        | ≤0.75/18                 |
|       | 7     |         | Ø1×7        |         |       |          |                          |
|       | 9     |         | Ø1×9        |         |       |          |                          |
| 10    |       | Ø1×10   |             |         |       |          |                          |
| WS20  | 2     | 25      | Ø2.5×2      | 500     | 1500  | 1        | ≤4/11                    |
|       | 3     |         | Ø2.5×3      |         |       |          |                          |
|       | 4     |         | Ø2.5×4      |         |       |          |                          |
|       | 5     | 10      | Ø1.5×5      | 400     | 1200  | 2.5      | ≤2/14                    |
|       | 7     |         | Ø1.5×7      |         |       |          |                          |
|       | 9     |         | Ø1×9        |         |       |          |                          |
|       | 12    | 5       | Ø1×12       | 400     | 1200  | 5        | ≤0.75/18                 |
| DYB32 | 2     | 25      | Ø2.5×2      | 500     | 1500  | 1        | ≤4/11                    |
|       | 3     |         | Ø2.5×3      |         |       |          |                          |
|       | 4     |         | Ø2.5×4      |         |       |          |                          |
|       | 9     | 5/25    | Ø1×5/Ø2.5×4 | 400     | 1200  | 5        | ≤0.75/18/≤4/11           |
|       | 10    |         | Ø1.5×10     |         |       |          |                          |
|       | 12    |         | Ø1.5×12     |         |       |          |                          |
|       | 19    | 5       | Ø1×19       | 400     | 1200  | 5        | ≤0.75/18                 |
| WS28  | 3     | 50      | Ø3.5×3      | 500     | 1500  | 0.5      | ≤10/7                    |
|       | 4     |         | Ø2.5×4      |         |       |          |                          |
|       | 7     |         | Ø2.5×7      |         |       |          |                          |
|       | 8     | 25      | Ø2.5×8      | 400     | 1200  | 1        | ≤4/11                    |
|       | 10    |         | Ø2.5×10     |         |       |          |                          |
|       | 12    |         | Ø1.5×12     |         |       |          |                          |
|       | 16    | 10      | Ø1.5×16     | 400     | 1200  | 2.5      | ≤2/14                    |
|       | 20    |         | Ø1×20       |         |       |          |                          |
| 24    | Ø1×24 |         |             |         |       |          |                          |
| 26    | 5     | Ø1×26   | 400         | 1200    | 5     | ≤0.75/18 |                          |

[www.vipdo.cn](http://www.vipdo.cn) 400-098-1117 工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!