


链条导向件 ◀ 带安装法兰型/树脂型




代码	类型	材质	
		槽钢	导轨
KAT01	带安装法兰型	横向型	槽钢
KAT02			不锈钢
KAT03	纵向型	纵向型	槽钢
KAT04			不锈钢

代码	类型	材质	
		凸型	凹型
KAW01	树脂型	凸型	超高分子量聚乙烯
KAW02		凹型	


横向型 KAT01 KAT02

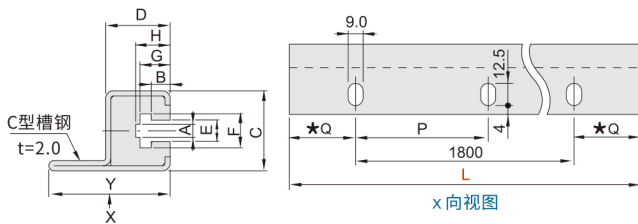



凸型 KAW01



纵向型 KAT03 KAT04

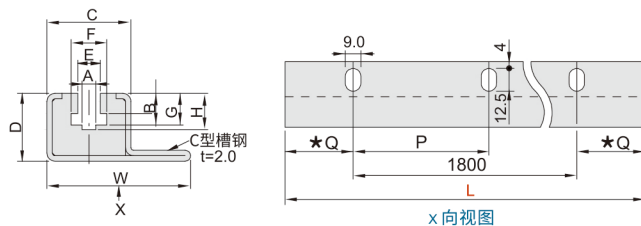

凹型 KAW02

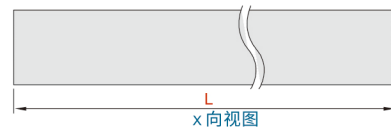

型号		L 指定单位 10mm	K 孔数	P 孔距	A	B	C	D	E	F	G	H	W	Y	重量 Kg/m							
代码	规格																					
横向 KAT01(钢) KAT02(不锈钢)	35	2000	10	200	4.6	4.3	30	25	5.3	9.9	7.9	9.3	\	47	2.37							
	40				5.1	7.4			8.4	13.2	11.7	13.7			2.31							
	50				6.4	8.9			10.7	16.5	14.5	16.2			2.24							
	60				7.4	11.7			12.4	19.8	18.5	20.6			2.18							
纵向 KAT03(钢) KAT04(不锈钢)	35				2000	10			200	4.6	4.3	30			25	5.3	9.9	7.9	9.3	\	53	2.4
	40									5.1	7.4					8.4	13.2	11.7	13.7			2.34
	50									6.4	8.9					10.7	16.5	14.5	16.2			2.27
	60									7.4	11.7					12.4	19.8	18.5	20.6			2.21

型号		L 长度选择 (mm)	A	B	C	D	E	F	G	H	重量 Kg/m						
代码	规格																
凸形 KAW01	40	2000	7.4	2.4	20	10	\	\	\	\	0.16						
	50		8.8	2.8							0.16						
	60		11.8	3.5							25	0.36					
凹形 KAW02	40		2000	5.1	7.4						25	30	8.4	13.2	11.7	13.7	0.58
	50			6.4	8.9						30	35	10.7	16.5	14.5	16.2	0.8
	60			7.4	11.7						35	40	12.4	19.8	18.5	20.6	1.04



请按图示订货

■ KAW01-50-L950

代码	规格	L 长度选择(mm)
KAW01	40	450
		950
		2000



交期Delivery

4天 发货

○本产品发货时间不含周日