



链轮/链条 ◀ 80B系列 (16A)

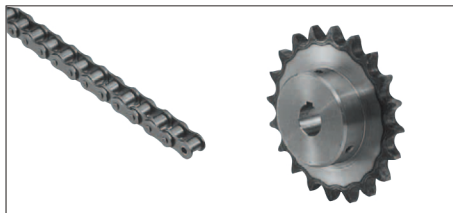

■ 链条	代码	类型	节距	材质		
	KHT80	80系列	25.4	钢		
	KHTQ80			钢(高强度)		
■ 链轮	代码	类型	材质	热处理	表面处理	附件
	KQV80B	80系列	S45C	齿顶高频	发黑	固定螺丝
	KQVS80B		SUS304	\	\	

链轮

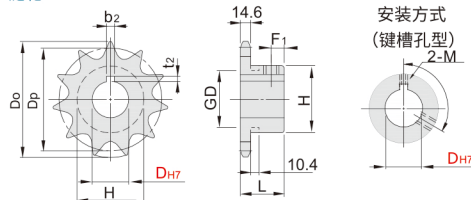


- 工艺问题, 无法保证多数产品齿顶一致重合;
- 齿顶和键槽的偏置为±0.5mm。

■ 轴孔加工尺寸表

轴孔直径 D	键槽 b2×t2	固定螺丝 M
24~30	8×3.3	8
32~38	10×3.3	8
40~42	12×3.3	8
45~50	14×3.8	10
55	16×4.3	12
60	18×4.4	12

链条

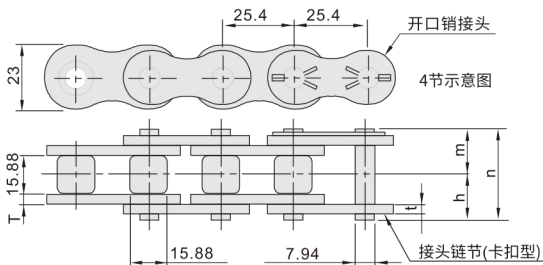

- 附带接头链节, 需自行安装。

链轮/链条
20

型号	齿数	轴孔直径D _{H7}										Dp	Do	盖壳			F1	重量(g)			
		9	10	11	12	13	14	15	16	17	18			19	20	H			GD	L	
■ 链轮 KQV80B	9	25	28	30	32	35							74.27	85	58	44			7	870	
	10	25	28	30	32	35							82.19	93	52					1020	
	11	25	28	30	32	35	38						90.16	102	60					1250	
	12	25	28	30	32	35	38	40	42	45			98.14	110	67					1600	
	13	25	28	30	32	35	38	40	42	45	48	50	106.14	118		77				1900	
	14	25	28	30	32	35	38	40	42	45	48	50	114.15	127						2150	
	15	25	28	30	32	35	38	40	42	45	48	50	55	60	122.17	135			40	12	2300
	16	25	28	30	32	35	38	40	42	45	48	50	55	60	130.2	143					2500
	17	25	28	30	32	35	38	40	42	45	48	50	55	60	138.23	151					2950
	18	25	28	30	32	35	38	40	42	45	48	50	55	60	146.27	159					3150
	19	25	28	30	32	35	38	40	42	45	48	50	55	60	154.32	167					3400
20	25	28	30	32	35	38	40	42	45	48	50	55	60	162.37	176					3600	
21	25	28	30	32	35	38	40	42	45	48	50	55	60	170.42	184					3850	
■ 链轮 KQVS80B	10	25	30										82.19	93	52					1020	
	12	25	30										98.14	110	67					1600	
	13	25	30										106.14	118		77				1900	
	14	25	30										114.15	127							2150
	15	25	30										122.17	135							2300
	16	30	35										130.2	143		93					2500
	20	35	40										162.37	176							3600

■ 链条	型号	节数(偶数)	接头形式	h	m	n	T/t
	KHT80	8~	A (卡扣)	16.07	19.18	35.25	3.2
	KHTQ80			17.7	20.8	38.5	4



请按图示订货

■ 链条KHTQ80-178

型号	节数(偶数)	接头形式
KHTQ80	8~	A (卡扣)

■ 链轮KQV80B-10-D32

型式	齿数	轴孔直径D _{H7}
KQV80B	9	25 28 30 32 35
	10	25 28 30 32 35



交期Delivery

3天 发货

○本产品发货时间不含周日