


平皮带 ◀ 特氟龙平皮带/食品用型




代码	用途	颜色	材质		表面纹路		厚度	织物层数	最小轮径	容许应力 kg/cm	连续使用温度	加防偏导条	类型											
			输送面	背面	输送面	背面																		
FTC01	低尘、防毛边	棕色	特氟龙	—	光面	—	0.125	—	70	2	-70~260	—	—											
FTC11	光伏硅片输送	白色																						
FTC21	耐热、防粘	棕色																						
FTC22																								
FTC23																								
FTC24																								
FTC31	耐高温	黑色																						
FTC32																								
FTC33																								
FTH01	—	白色												PU	聚酯织物	亚光面	布纹	0.7	1	6	4	-15~80	可加装	食品用型
FTH02																								
FTH03																								
FTH04																								
FTH11																								
FTH12																								
FTH12																								

FTC01/11/21/22/
23/24/31/32/33

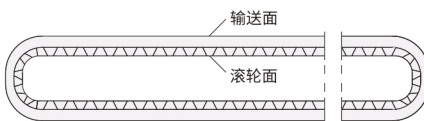

FTH01/02/03/
04/11/12

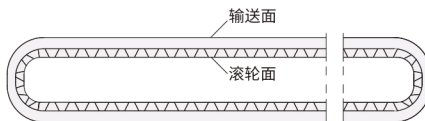

型号		皮带周长L (m) 最小单位0.001m
代码	皮带宽度W (mm)	
FTC01 FTC11 FTC21 FTC22 FTC23 FTC24 FTC31 FTC32 FTC33	20~500	0.5~20

型号		皮带周长L(m) 最小单位0.001m
代码	皮带宽度W (mm)	
FTH01 FTH02 FTH03 FTH04 FTH11 FTH12	10~2000	0.5~20



请按图示订货

■ FTC01-W150-L2

型号		皮带周长L (m)
代码	皮带宽度W(mm)	最小单位0.001m
FTC01	20~500	0.5~20



交期Delivery

4天 发货

○本产品发货时间不含周日