


气压连接块 ◀ I形/L形端面不贯穿




代码	类型	材质		边长	常压
		国标	相当		
BBD01	I形端面不贯穿	LF2	A5052	30×40	1MPa≈10.2Kg _f /cm ² 以下
BBD02	L形端面不贯穿			50×50	
BBD11				30×40	
BBD12				50×50	

BBD01/BBD02

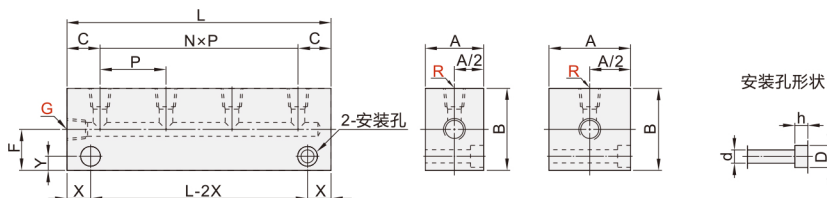

BBD11/BBD12

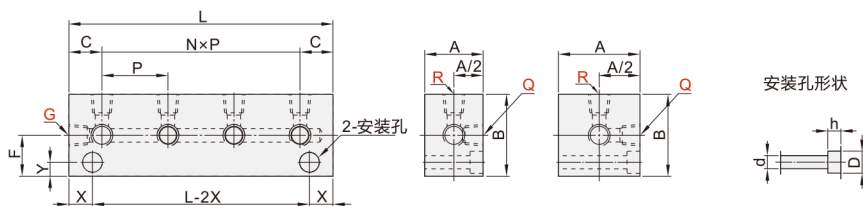

型号		Rc(PT)/M选择		间距	间距数	螺孔总数	L	A	B	C	F	X	H	安装孔尺寸		
代码	侧面孔数	Q-R	G	P	N	R·G								d	D	h
BBD01	1	1 (1/8) 2 (1/4) 5 (M5)	1 (1/8) 2 (1/4) 5 (M5)	30	0	2	40	30	40	20	20	7.5	7	5.5	9.5	6
	2				1	3	70									
	3				2	4	100									
	(4)				3	5	130									
	(5)				4	6	160									
BBD02	1	1 (1/8) 2 (1/4) 3 (3/8) 4 (1/2)	2 (1/4) 3 (3/8) 4 (1/2)	40	0	2	50	50	50	25	25	8.5	8.5	8.5	14	9
	2				1	3	90									
	3				2	4	130									
	4				3	5	170									
BBD11	1	1 (1/8) 2 (1/4) 5 (M5)	1 (1/8) 2 (1/4) 5 (M5)	30	0	2	40	30	40	20	20	7.5	7	5.5	9.5	6
	2				1	3	70									
	3				2	4	100									
	(4)				3	5	130									
	(5)				4	6	160									
BBD12	1	1 (1/8) 2 (1/4) 3 (3/8) 4 (1/2)	2 (1/4) 3 (3/8) 4 (1/2)	40	0	2	50	50	50	25	25	8.5	8.5	8.5	14	9
	2				1	3	90									
	3				2	4	130									
	(4)				3	5	170									
	(5)				4	6	160									

■选择“侧面孔数”中带()的4、5规格时，G不可选5(M5)。



请按图示订货

■ BBD11-1-Q2M-R1-G1

代码	侧面孔数	Rc(PT)/M选择	
		Q.R.G	
BBD11	1	2(1/4)	1(1/8)



交期Delivery

5天

发货

本产品发货时间不含周日