


# 同步带用金属件 ◀ 螺帽紧固型(组件)



代码	类型	材质	表面处理	附件
EAC11	螺帽紧固型	铝合金	本色阳极氧化	内六角螺栓/螺帽

EAC11 (齿条+压板)  
齿条

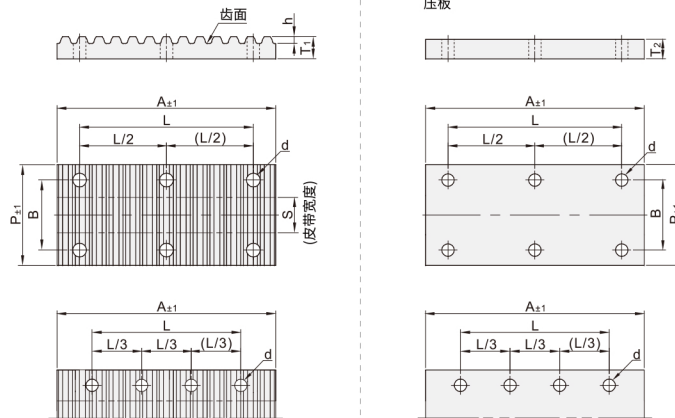

型号		S	A	B	T1	T2	h	L	P	附属螺栓	d	安装孔数
代码	皮带种类											
EAC11 (齿条+压板)	MXL	025	6.4	27	4	4	0.51	19	19	M3-L15	3.3	6
		037	9.5						23			
		050	12.7						27			
	XL	025	6.4	67	6	1.25	56	25	M4-L16	4.3		
		031	7.9					26				
		037	9.5					27				
	L	050	12.7	125	8	5	1.9	111	M5-L20	5.3	8	
		075	19.1					20				
		100	25.4					26				
	H	150	38.1	166	10	2.3	147	39	M5-L20	5.3		
		075	19.1					45				
		100	25.4					58				
	S2M	040	4	27	4	4	0.76	18	8	M3-L15	3.3	6
		060	6						10			
		100	10						15			

型号		S	A	B	T1	T2	h	L	P	附属螺栓	d	安装孔数
代码	皮带种类											
EAC11 (齿条+压板)	S3M	060	6	40	4	4	1.14	31	19	M3-L15	3.3	6
		100	10						23			
		150	15						29			
	S5M	100	10	66	6	5	1.81	51	27	M4-L16	4.3	
		150	15						33			
		250	25						43			
	S8M	150	15	105	8	5	2.85	84	35	M5-L20	5.3	8
		250	25						45			
		300	30						51			
	T5	100	10	66	6	5	1.2	51	27	M4-L16	4.3	
		150	15						33			
		200	20						39			
	T10	250	25	131	8	5	2.5	111	44	M5-L20	5.3	
		150	15						35			
		200	20						41			
	250	25						45				
	300	30						51				

同步带  
15



请按图示订货

## ■ EAC11-MXL-025

型号			S
代码	皮带种类	皮带公称宽度	
EAC11	MXL	025	6.4



交期Delivery

7天 发货

○本产品发货时间不含周日