


免键高扭矩圆弧齿同步带轮 ◀ S5M型(齿距5.0)



| 型号 | | | 材质 | | | 表面处理 | | |
|---------------|---------------|---------------|------|------|------|--------|----|----|
| 皮带宽度 10mm | 皮带宽度 15mm | 皮带宽度 25mm | 带轮 | 法兰 | 衬套 | 带轮 | 法兰 | 衬套 |
| A : 11 W : 16 | A : 17 W : 22 | A : 27 W : 32 | | | | | | |
| VAE01□□S5M100 | VAE11□□S5M150 | VAE21□□S5M250 | 铝合金 | 铝合金 | S45C | 本色阳极氧化 | | 发黑 |
| VAE03□□S5M100 | VAE13□□S5M150 | VAE23□□S5M250 | S45C | SPCC | | 发黑 | 发黑 | 发黑 |
| VAE04□□S5M100 | VAE14□□S5M150 | VAE24□□S5M250 | | | | 无电解镀锌 | | |

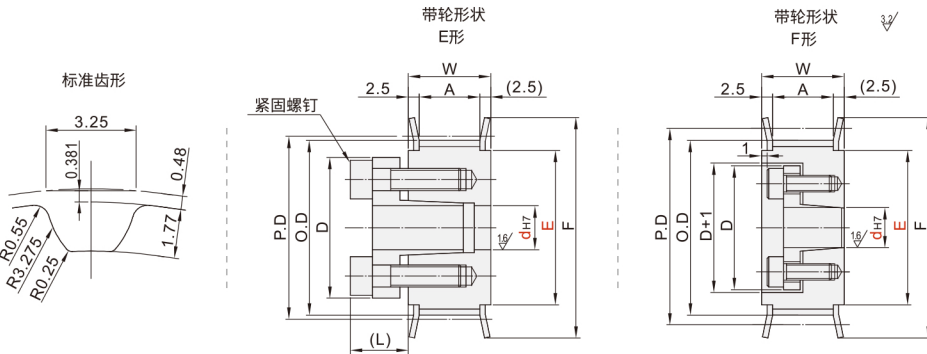

| 型号 | | 轴孔规格dH7(根据胀套孔径表选择) | | | | | | P.D. | O.D. | F | E | A | W |
|--|--|--|-----------|----------------------|------------|----------------------|----------------------|--------|-------|-----|----|--------------------------|---|
| 代码 | 齿数 | S5M100 | | S5M150 | | S5M250 | | | | | | | |
| 带轮形状 | 齿数 | E型 (ST胀套) | F型 (SH胀套) | E型 (ST胀套) | F型 (SH胀套) | E型 (ST胀套) | F型 (SH胀套) | | | | | | |
| VAE01-S5M100 VAE03-S5M100 VAE04-S5M100 | 22 | 8 | / | / | / | / | / | 35.01 | 34.05 | 40 | 27 | S5M100 A: 11 W: 16 | |
| | 24 | 8 10 | 8 | 10 | 8 | 10 | 8 | 38.2 | 37.24 | 45 | 30 | | |
| | 25 | 8 10 11 12 | 8 | 10-12 | 8 10 11 12 | 10 11 12 | 8 10 11 12 | 41.38 | 40.42 | 48 | 35 | | |
| | 26 | 8 10 11 12 | 8 | 10-12 | 8 10 11 12 | 10 11 12 | 8 10 11 12 | 44.56 | 43.6 | 48 | 35 | | |
| VAE11-S5M150 VAE13-S5M150 VAE14-S5M150 | 30 | 10 11 12 14 15 | / | 10-15(无13) | 10 11 12 | 10 11 12 14 15 | 10 11 12 | 47.75 | 46.79 | 52 | 36 | S5M150 A: 17 W: 22 | |
| | 32 | 10 11 12 14 15 | / | 10-17(无13) | 10 11 12 | 10 11 12 14 15 16 17 | 10 11 12 | 50.93 | 49.97 | 55 | 40 | | |
| | 34 | 10 11 12 14 15 | / | 10-17(无13) | 10 11 12 | 10 11 12 14 15 16 17 | 10 11 12 | 54.11 | 53.15 | 61 | 45 | | |
| VAE21-S5M250 VAE23-S5M250 VAE24-S5M250 | 36 | 12 14 15 16 17 18 19 20 22 24 25 | / | 12-25 (无13,21) | 12 | 12-25 (无13,21) | 12-25 (无13,21) | 63.66 | 62.7 | 67 | 50 | S5M250 A: 27 W: 32 | |
| | 40 | 12 14 15 16 17 18 19 20 22 24 25 28 | / | 12-28 (无13,21,26,27) | 12 | 12-28 (无13,21,26,27) | 12-28 (无13,21,26,27) | 57.3 | 56.34 | 61 | 45 | | |
| | 44 | 12 14 15 16 17 18 19 20 22 24 25 28 30 32 | / | 12-32 (无13,21,26,27) | 12 | 12-32 (无13,21,26,27) | 12-32 (无13,21,26,27) | 70.03 | 69.07 | 74 | 58 | | |
| | 48 | 12 14 15 16 17 18 19 20 22 24 25 28 30 32 | / | 12-40 | 12 | 12-40 | 12-40 | 76.39 | 75.43 | 83 | 63 | | |
| | 50 | 12 14 15 16 17 18 19 20 22 24 25 28 30 32 | / | 12-42 | 12 | 12-42 | 12-42 | 79.58 | 78.62 | 87 | 67 | | |
| | 60 | 12 14 15 16 17 18 19 20 22 24 25 28 30 32 | / | 12-42 | 12 | 12-42 | 12-42 | 95.49 | 94.53 | 99 | 80 | | |
| 72 | 12 14 15 16 17 18 19 20 22 24 25 28 30 32 | / | 12-42 | 12 | 12-42 | 12-42 | 114.59 | 113.63 | 119 | 100 | | | |

胀套孔径尺寸

| dH7 | 容许最大扭矩 N·M | | D | | (L) |
|-----|------------|------|------|------|------|
| | ST胀套 | SH胀套 | ST胀套 | SH胀套 | |
| 8 | 16 | 8.5 | 25.5 | 24.5 | 8.5 |
| 10 | 39 | 18 | 30 | 29 | 10.5 |
| 11 | 43 | 20 | 31 | 30 | |
| 12 | 48 | 23 | 32 | 31 | |
| 14 | 73 | 37 | 35 | 36 | 12 |
| 15 | 78 | 39 | 36 | 37 | |
| 16 | 83 | 42 | 37 | 38 | 13 |
| 17 | 88 | 45 | 38 | 39 | |

胀套孔径尺寸

| dH7 | 容许最大扭矩 N·M | | D | | (L) |
|-----|------------|------|------|------|------|
| | ST胀套 | SH胀套 | ST胀套 | SH胀套 | |
| 18 | 154 | 48 | 43 | 40 | 14 |
| 19 | 163 | 49 | 45 | 42 | |
| 20 | 171 | 97 | 46 | 46 | |
| 22 | 186 | 110 | 48 | 47 | |
| 24 | 206 | 121 | 50 | 49 | 15.5 |
| 25 | 216 | 124 | 52 | 51 | |
| 28 | 353 | 141 | 54 | 53 | |
| 30 | 382 | 149 | 57 | 56 | |

胀套孔径尺寸

| dH7 | 容许最大扭矩 N·M | | D | | (L) |
|-----|------------|------|------|------|------|
| | ST胀套 | SH胀套 | ST胀套 | SH胀套 | |
| 32 | 412 | 163 | 59 | 58 | 16.5 |
| 35 | 451 | 173 | 63 | 61 | |
| 38 | 686 | / | 70 | / | |
| 40 | 725 | / | 71 | / | |
| 42 | 757 | / | 74 | / | 20 |



请按图示订货

VAE01-S5M100-22-E-d8

| 型号 | | 带轮形状 | 轴孔规格 d H7 |
|--------------|----|------|-----------|
| 代码 | 齿数 | | |
| VAE01-S5M100 | 22 | E | E |
| | 24 | F | 8 |



交期Delivery

7天 发货

○本产品发货时间不含周日

同步轮

14