


# 弹性圆柱销 ◀ 带齿形槽/直杆型




代码	类型	材质	硬度	表面处理	适用标准
PLJ01	带齿形槽	不锈钢	42-48HRC	/	/
PLJ02	直杆型	弹簧钢	45-50HRC	发黑	JIS B 2808

带齿形槽  
PLJ01

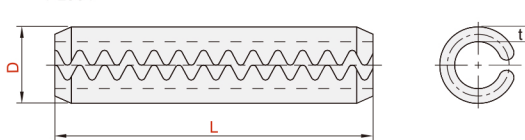

直杆型  
PLJ02

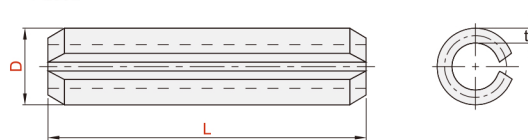

## 带齿形槽

代码	型号		L													t					
	D	D	5	6	8	10	12	14	16	18	20	22	25	28	32		36	40	45	50	56
PLJ01	2	+0.25	5	6	8	10	12	14	16	18	20										0.4
	3	+0.15	6	8	10	12	14	16	18	20	22	25	28	32							0.6
	4	+0.40	8	10	12	14	16	18	20	22	25	28	32	36	40						0.8
	5	+0.20	10	12	14	16	18	20	22	25	28	32	36	40	45	50					1
	6		12	14	16	18	20	22	25	28	32	36	40	45	50	56					1.2

## 直杆型

代码	型号		L																	t	
	D	D尺寸范围																			
		min	max	5	10	16	20	25	30	35	40	45	50	55	60	65	70	75	80		90
PLJ02	1	1.1	1.2	5	10																0.2
	1.2	1.3	1.4	5	10																0.25
	1.4	1.5	1.6	5	10																0.28
	1.6	1.7	1.8	5	10																0.3
	2	2.15	2.25	5	10	16	20														0.4
	2.5	2.65	2.75	10	16	20															0.5
	3	3.15	3.25	10	16	20	25	30													0.6
	4	4.2	4.4	10	16	20	25	30	35	40											0.8
	5	5.2	5.4	10	16	20	25	30	35	40	45	50									1
	6	6.2	6.4	10	16	20	25	30	35	40	45	50	55	60							1.2
	8	8.3	8.6	16	20	25	30	35	40	45	50	55	60	65	70	75	80				1.6
10	10.3	10.6	16	20	25	30	35	40	45	50	55	60	65	70	75	80	90	100		2	

小  
零  
件  
35



请按图示订货

### PLJ01-D2-L5

型号		L
代码	D	
PLJ01	2	5 6 8 10 12 14 16 18 20



交期Delivery

**3**天 发货

○本产品发货时间不含周日