

圆形支柱

L尺寸指定型·标准型/带板手槽型

标准型·两端外螺纹型




L尺寸指定型		标准型	材质		表面处理
标准型	带板手槽型	两端外螺纹型	国标	相当	
OAD01	OAD11	OA21	Q235	SS400	/
OAD02	OAD12	OA22			发黑
OAD03	OAD13	OA23			无电解镀锌
OAD06	OAD16	OA26	OCr18Ni9	SUS304	/
OAD08	OAD18	/	LY11	A2017	本色阳极氧化

■Q235材质的产品出货时带有防锈油。

L	公差
8~300	±0.2
300.5~600	±0.3
600.5~1200	±0.4


标准型

OAD01/02/03/06/08

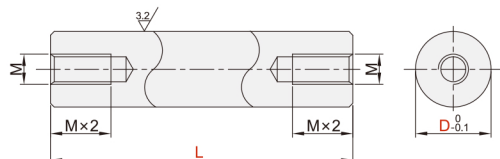


两端外螺纹型

OA21/22/23/26

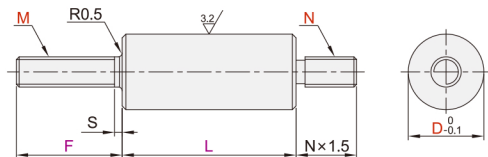

带板手槽型

OAD11/12/13/16/18

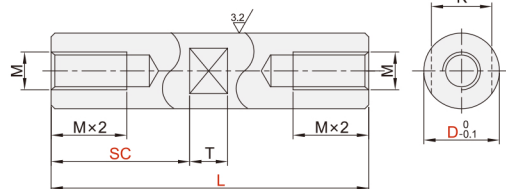

型号		最小单位0.5 L	M
代码	Dg6		
标准型 OAD01 OAD02 OAD03 OAD06 OAD08	5	8.0~60.0	2.6
	6		3
	8	10.0~160.0	4
	10	15.0~360.0	5
	12	25.0~420.0	6
	15	25.0~520.0	8
	20	30.0~520.0	10
	25	40.0~620.0	12
	30	50.0~720.0	16
	35	50.0~820.0	16
	40	60.0~920.0	20
	50	75.0~1020.0	24

型号		最小单位 0.1		M	K	T
代码	Dg6	L	SC			
带板手槽型 OAD11 OAD12 OAD13 OAD16 OAD18	5	8.0~60.0	0~50	2.6	4	10
	6			3	5	
	8	10.0~160.0	0~150	4	7	
	10	15.0~360.0	0~350	5	8	12
	12	25.0~420.0	0~398	6	10	
	15	25.0~520.0	0~508	8	13	
	20	30.0~520.0		10	17	16
	25	40.0~620.0	0~608	12	22	
	30	50.0~720.0	0~705	16	27	
	35	50.0~820.0	0~805	16	30	20
	40	60.0~920.0	0~900	20	36	
	50	75.0~1020.0	0~1000	24	41	

型号		最小单位 0.5		M			N			S						
代码	D	L	F													
两端外螺纹型 OAH21 OAH22 OAH23 OAH26	5	8.0~60.0	5.0~25.0	2.6	3	2.6	3	1.0								
	6		5.0~30.0	3	4	3	4									
	8	10.0~160.0	8.0~40.0	3	4	5	3		4	5	1.6					
	10	15.0~360.0	8.0~45.0	4	5	6	4	5	6	2.0						
	12	25.0~420.0	10.0~55.0	5	6	8	5	6	8	2.5						
	15	25.0~520.0	12.0~60.0	6	8	10	6	8	10	3.0						
	20	30.0~520.0	15.0~75.0	6	8	10	12	6	8	10	12	3.5				
	25	40.0~620.0	20.0~80.0	6	8	10	12	16	6	8	10	12	16	4.0		
	30	50.0~720.0	25.0~90.0	6	8	10	12	16	20	6	8	10	12	16	20	5.0
	35	50.0~820.0	30.0~100.0	8	10	12	16	20	8	10	12	16	20	6.0		
	40	60.0~920.0	35.0~110.0	10	12	16	20	24	10	12	16	20	24			
	50	75.0~1020.0	40.0~120.0	12	16	20	24	12	16	20	24					



请按图示订货

■OAD11-D5-L60-SC25-M2.6

型号		最小单位1		M
代码	D	L	SC	
OAD11	5	8.0~60.0	0~52	2.6



交期Delivery

5天

发货

○本产品发货时间不含周日

支柱
底座
07