



# 六角支柱 ◀ 两端内螺纹型·L尺寸指定型/L尺寸螺纹指定型



L尺寸指定型  
OBC01/02/03/06

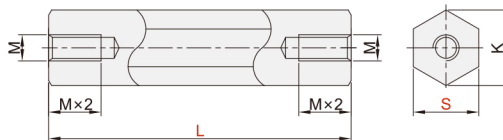

L尺寸螺纹指定型  
OBC11/12/13/16

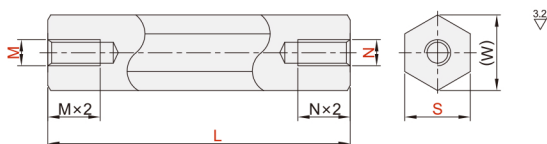

■Q235材质的产品出货时带有防锈油。

代码		材质		表面处理
L尺寸指定型	L尺寸螺纹指定型	国标	相当	
OBC01	OBC11	Q235	SS400	/
OBC02	OBC12			发黑
OBC03	OBC13			无电解镀镍
OBC06	OBC16	OCr18Ni9	SUS304	/

L	公差
8~300	±0.2
300.5~620	±0.3
620.5~1020	±0.4


## ■L尺寸指定型

代码	型号		M	K	
	S	L			
OBC01	5	8.0~60.0	2.6	5.8	
	6		3	6.9	
	7	10.0~160.0	4	8.1	
	8	15.0~260.0	5	9.2	
	10	25.0~360.0	6	11.5	
	12	25.0~420.0		13.9	
	OBC02	13		30.0~420.0	8
	OBC03	14	25.0~520.0	10	16.2
	OBC06	17	40.0~520.0		19.6
	19	50.0~520.0	12		21.9
24	50.0~620.0	16	27.7		
27	50.0~820.0	20	31.2		
30	50.0~1020.0		34.6		
32			24		36.9

## ■L尺寸螺纹指定型

代码	型号		M	K	
	S	L			
OBC11	5	8.0~60.0	2 2.6	5.8	
	6	15.0~60.0	3 4	6.9	
	7	15.0~160.0	3 4 5	8.1	
	8	20.0~260.0	3 4 5 6	9.2	
	10	25.0~360.0	4 5 6 8	11.5	
	12	25.0~420.0	4 5 6 8	13.9	
	OBC12	13	30.0~420.0	4 5 6 8 10	15.0
	OBC13	14	30.0~520.0	4 5 6 8 10	16.2
	OBC16	17	40.0~520.0	5 6 8 10 12	19.6
	19	50.0~520.0	5 6 8 10 12 16	21.9	
24	60.0~620.0	6 8 10 12 16 20	27.7		
27	60.0~820.0	5 6 8 10 12 16 20	31.2		
30	60.0~1020.0	5 6 8 10 12 16 20 24	34.6		
32	60.0~1020.0	5 6 8 10 12 16 20 24	36.9		

## ■可选追加加工项

代码	技术说明
LC	变更L尺寸公差  选型方法 LC <ul style="list-style-type: none"> <li>■L尺寸公差变更: L8~300 变更为:±0.05;</li> <li>L300.5~620 变更为:±0.10;</li> <li>L620.5~1020 变更为:±0.15</li> </ul>



请按图示订货

### ■OBC12-S6-L50-M3-LC

代码	型号		M	可选加工代码
	S	L		
OBC12	6	15.0~60.0	3 4	LC



交期Delivery

5天 发货

○本产品发货时间不含周日

固定夹  
支柱  
底座

07



www.vipdo.cn 400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!