

圆形支柱

标准型/带扳手槽型
两端外螺纹型·螺纹长度指定型




L	公差
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4


螺纹长度指定型		材质		表面处理
标准型	带扳手槽型	国标	相当	
OAB41	OAB51	Q235	SS400	/
OAB42	OAB52			发黑
OAB43	OAB53			无电解镀锌
OAB46	OAB56	0Cr18Ni9	SUS304	/

注:Q235材质的产品出货时带有防锈油。

标准型
OAB41/42/43/46

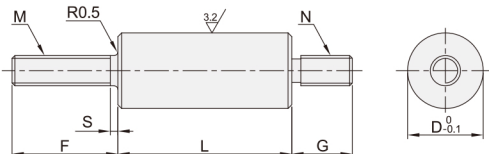

带扳手槽型
OAB51/52/53/56

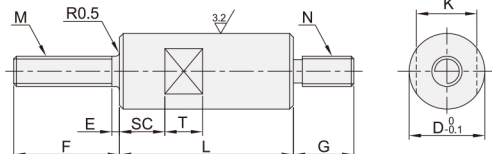

型号		最小单位0.5			M		N		S
代码	D	L	F	G					
OAB41 OAB42 OAB43 OAB46	5	15.0~60.0	5.0~25.0	5.0~25.0	2.6 3		2.6 3		1.0
	6		5.0~30.0	5.0~30.0	3 4	3 4			
	8		20.0~160.0	8.0~40.0	8.0~40.0	4 5	4 5	1.6	
	10	20.0~360.0	8.0~45.0	8.0~45.0	4 5 6	4 5 6	2.0		
	12	25.0~420.0	10.0~55.0	10.0~55.0	5 6 8	5 6 8	2.5		
	15	30.0~520.0	12.0~60.0	12.0~60.0	6 8 10	6 8 10	3.0		
	20	40.0~520.0	15.0~75.0	15.0~75.0	6 8 10 12	6 8 10 12	3.5		
	25	55.0~620.0	20.0~80.0	20.0~80.0	6 8 10 12 16	6 8 10 12 16	4.0		
	30	65.0~720.0	25.0~90.0	25.0~90.0	6 8 10 12 16 20	6 8 10 12 16 20	5.0		
	35	80.0~820.0	30.0~100.0	30.0~100.0	8 10 12 16 20 24	8 10 12 16 20 24	6.0		
	40	80.0~920.0	35.0~110.0	35.0~110.0	10 12 16 20 24	10 12 16 20 24			
	50	80.0~1020.0	40.0~120.0	40.0~120.0	12 16 20 24	12 16 20 24			

型号		最小单位0.5				M		N		K	T	S
代码	D	L	F	G	SC							
OAB51 OAB52 OAB53 OAB56	5	15.0~60.0	5.0~25.0	5.0~25.0	0~50.0	2.6	3	2.6	3	4	10	1.0
	6		5.0~30.0	5.0~30.0		3	4	3	4	5		
	8		8.0~40.0	8.0~40.0		4	5	4	5	7		
	10	20.0~360.0	8.0~45.0	8.0~45.0	0~350.0	4	5 6	4	5 6	8	12	2.0
	12	25.0~420.0	10.0~55.0	10.0~55.0	0~408.0	5	6 8	5	6 8	10		2.5
	15	30.0~520.0	12.0~60.0	12.0~60.0	0~508.0	6	8 10	6	8 10	13		3.0
	20	40.0~520.0	15.0~75.0	15.0~75.0		6	8 10 12	6	8 10 12	17	16	3.5
	25	55.0~620.0	20.0~80.0	20.0~80.0		6	8 10 12 16	6	8 10 12 16	22		4.0
	30	65.0~720.0	25.0~90.0	25.0~90.0	0~705.0	6	8 10 12 16 20	6	8 10 12 16 20	27	20	5.0
	35	80.0~820.0	30.0~100.0	30.0~100.0	0~805.0	8	10 12 16 20 24	8	10 12 16 20 24	30		6.0
	40	80.0~920.0	35.0~110.0	35.0~110.0	0~900.0	10	12 16 20 24	10	12 16 20 24	36		
	50	80.0~1020.0	40.0~120.0	40.0~120.0	0~1000.0	12	16 20 24	12	16 20 24	41		

可选加工

代码	技术说明	
AC	增加退刀槽	
		选型方法:AC 加工A尺寸根部退刀槽

代码	技术说明																									
LD()	增加六角扳手用通孔																									
		选型方法:LD35 ①最小单位1 ②适用范围:D8~30 ③指定d尺寸时, 请注意LD尺寸, 避免与螺孔干涉, 碰边等。																								
	<table border="1"> <tr> <th>D</th><th>d</th><th>扳手对边</th></tr> <tr> <td>8</td><td>2.5</td><td>2</td></tr> <tr> <td>10</td><td>3</td><td>2.5</td></tr> <tr> <td>12</td><td>3.5</td><td>3</td></tr> <tr> <td>15</td><td>4.6</td><td>4</td></tr> <tr> <td>20</td><td>5.8</td><td>5</td></tr> <tr> <td>25</td><td>6.9</td><td>6</td></tr> <tr> <td>30</td><td>9.2</td><td>8</td></tr> </table>	D	d	扳手对边	8	2.5	2	10	3	2.5	12	3.5	3	15	4.6	4	20	5.8	5	25	6.9	6	30	9.2	8	
D	d	扳手对边																								
8	2.5	2																								
10	3	2.5																								
12	3.5	3																								
15	4.6	4																								
20	5.8	5																								
25	6.9	6																								
30	9.2	8																								



请按图示订货

■ OAB41-D5-L50-F20-G20-M3-N3-AC

型号		最小单位0.5			M	N	可选加工代码
代码	D	L	F	G			
OAB41	5	15.0~60.0	5.0~25.0	5.0~25.0	2.6 3	2.6 3	AC



交期Delivery

6天 发货

○本产品发货时间不含周日

固定支柱
底座
07