

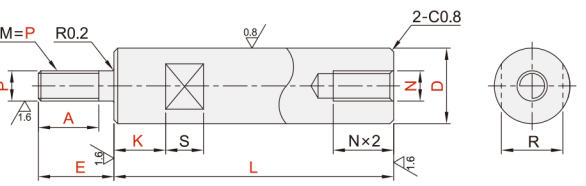
转轴 ◀ 一端台阶型/一端外螺纹型一端内螺纹型·带扳手槽型



代码	类型	公差		材质		表面处理
		D	P	国标	相当	
ABN11	一端内螺纹型 带扳手槽型	g6	g6	45	S45C	发黑
ABN12				OCr18Ni9	SUS304	无电解镀锌
ABN26				35CrNo	SCN435硬度28~33HRC	发黑
ABN31		h7	h7	45	S45C	无电解镀锌
ABN51				OCr18Ni9	SUS304	发黑
ABN52						发黑
ABN56		h9	g6	45	S45C	发黑
ABN71						无电解镀锌
ABN72						发黑
ABN76						无电解镀锌
ABN91						发黑
ABN92		h7				无电解镀锌
ABN96	OCr18Ni9					SUS304

D·P	g6	h7	h9
3	-0.002 -0.008	-0 -0.010	-0 -0.025
3.1~6	-0.004 -0.012	-0 -0.012	-0 -0.030
6.1~10	-0.005 -0.014	-0 -0.015	-0 -0.036
10.1~18	-0.006 -0.017	-0 -0.018	-0 -0.043
18.1~30	-0.007 -0.020	-0 -0.021	-0 -0.052
30.1~50	-0.009 -0.025	-0 -0.025	-0 -0.062

■圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。



g6


型号		最小单位0.1		最小单位1	P			N			K	R	S				
代码	Dg6	L	E	A	最小单位1			最小单位1			最小单位1						
ABN11 ABN12 ABN26 ABN31	6	18.0~300	5≤E≤P×8	P≤6时 A≤E-2 P=8、10时 A≤E-3 P≥12时 A≤E-5	3	4	5	3	4	5	K=0或 K≥1	5	10				
	8	18.0~400			3	4	5	6	3	4		5		6	7		
	10	18.0~500			4	5	6	8	4	5		6		8	8		
	12	20.0~600			5	6	8	10	5	6		8	10	10			
	13	20.0~600			5	6	8	10	5	6		8	10	11			
	15	20~700			5	6	8	10	12	5		6	8	10	12	12	
	16	20~800			5	6	8	10	12	5		6	8	10	12		
	17	25.0~800.0			5	6	8	10	12	5		6	8	10	12		
	18				5	6	8	10	12	5		6	8	10	12		
	20				5	6	8	10	12	5		6	8	10	12		
	22				6	8	10	12	16	6		8	10	12	16		
	25				6	8	10	12	16	6		8	10	12	16		
	30				8	10	12	16	20	8		10	12	16	20		
	35				8	10	12	16	20	24		8	10	12	16	20	
	40				10	12	16	20	24	30		10	12	16	20	24	30
	50	35~800			12	16	20	24	30	12		16	20	24	30	36	16
					16	20	24	30	16	20		24	30	41	20		

h7		最小单位0.1		最小单位1	P				N				K	R	S			
型号	Dh7	L	E	A	最小单位1				最小单位1				最小单位1					
ABN51 ABN52 ABN56	6	18.0~300	5≤E≤P×8	P≤6时 A≤E-2 P=8、10时 A≤E-3 P≥12时 A≤E-5	3	4	5		3	4	5		K=0或 K≥1	5	10			
	8	18.0~400			3	4	5	6	3	4	5	6		7				
	10	18.0~500			4	5	6	8	4	5	6	8		8				
	12	20.0~600			5	6	8	10	5	6	8	10		10				
	15	20~700			5	6	8	10	12	5	6	8		10	12	13		
	20	25.0~800.0			6	8	10	12	16	6	8	10		12	16	17		
	25				8	10	12	16	20	8	10	12		16	20	22		
	30				8	10	12	16	20	24	8	10		12	16	20	24	27
	35				10	12	16	20	24	30	10	12		16	20	24	30	30
	40				12	16	20	24	30	12	16	20		24	30	36		
50		16	20	24	30	16	20	24	30		41	20						




h9		最小单位0.1		最小单位1	P				N				K	R	S	
型号	Dh9	L	E	A	最小单位1				最小单位1				最小单位1			
ABN71	6	18.0~300	5≤E≤P×8	P≤6时 A≤E-2	3	4	5		3	4	5		K=0或 K≥1	5	10	
	8	18.0~400			3	4	5	6	3	4	5	6		7		
ABN72	10	18.0~500			4	5	6	8	4	5	6	8		8		
ABN76	12	20.0~600			5	6	8	10	5	6	8	10		10		
ABN91	15	20~700			5	6	8	10	12	5	6	8	10	12	13	12
ABN92	20	25.0~800.0			6	8	10	12	16	6	8	10	12	16	17	
ABN96	25				8	10	12	16	20	8	10	12	16	20	22	
30	8				10	12	16	20	24	8	10	12	16	20	24	
35	35~800				10	12	16	20	24	30	10	12	16	20	24	30

转轴 ▶ 一端台阶型/一端内螺纹型·带扳手槽型

■可选加工项

代码	技术说明																																																																																																																																																																																																																
LC	变更L尺寸公差  选型方法 LC ■L<400变更为L±0.05; L≥400变更为L±0.1																																																																																																																																																																																																																
MC()	变更外螺纹为细牙螺纹  选型方法 MC20 <table><thead><tr><th>D</th><th>3</th><th>4</th><th>5</th><th>6</th><th>8</th><th>10</th><th>12</th><th>15</th><th>17</th><th>20</th><th>25</th><th>30</th><th>35</th><th>40</th><th>50</th></tr></thead><tbody><tr><td>6</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>8</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>10</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>12</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>15</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>17</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>20</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>25</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>30</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>35</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>40</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>50</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>15</td><td>17</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr></tbody></table> ■选型时，须将P变更为MC ■选型时，P与MC须变为相同尺寸	D	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	6	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	8	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	10	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	12	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	15	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	17	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	20	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	25	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	30	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	35	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	40	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50	50	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50
D	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
6	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
8	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
10	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
12	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
15	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
17	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
20	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
25	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
30	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
35	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
40	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
50	3	4	5	6	8	10	12	15	17	20	25	30	35	40	50																																																																																																																																																																																																		
LA() LB()	增加1处平面LA()  选型方法 LA10-G3 增加2处平面LB()  选型方法 LB10-J3-Y10-X3 ■最小单位1 ■指定G·J·X时，须为50以下。 <table><thead><tr><th>D</th><th>h</th></tr></thead><tbody><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></tbody></table>	D	h	6~17	1	18~40	2	50	3																																																																																																																																																																																																								
D	h																																																																																																																																																																																																																
6~17	1																																																																																																																																																																																																																
18~40	2																																																																																																																																																																																																																
50	3																																																																																																																																																																																																																

代码 技术说明

KB() KC()	增加1处键槽KB()  增加2处键槽KC()  选型方法 KB50-S10 选型方法 KC50-C8-H40-T10 ■最小单位1 ■指定S·C·T时，须为100以下。 ■需要3处键槽时，请同时选择KB与KC ■键槽详情见转轴产品简介。															
PA()	增加轴端键槽(仅限P部)  选型方法 PA10 ■最小单位1 ■PA≥50,PA≥E, P≤5不适用 ■键槽详情见转轴产品简介。															
KD()	增加开口凸轮用槽  选型方法 KD10 ■最小单位1 ■适用右表D规格 <table><thead><tr><th>D</th><th>d</th><th>V2</th></tr></thead><tbody><tr><td>6</td><td>5</td><td>4</td></tr><tr><td>8</td><td>7</td><td>4</td></tr><tr><td>10</td><td>8</td><td>5</td></tr><tr><td>12</td><td>10</td><td>5</td></tr></tbody></table>	D	d	V2	6	5	4	8	7	4	10	8	5	12	10	5
D	d	V2														
6	5	4														
8	7	4														
10	8	5														
12	10	5														
MA() MB()	增加挡圈槽(附带挡圈)  选型方法 MA10-MB10 ■最小单位1 ■MA(MB)=4~L/2 ■挡圈槽尺寸见转轴产品简介。															

☎ 请按图示订货

■ABN12-D6-L300-E5-A5-P5-N5-K5

型号	代码	D	L	E	A	P	N	K
ABN12	6	300	5	5	5	5	5	5

 交期Delivery
5天 发货
○本产品发货时间不含周日